



SPECIAL EDITION - 106<sup>th</sup> year

**HIGH PERFORMANCE**  
**THE POWER OF GAS,**  
**THE SAFETY OF HOT AIR**

(Page 2)  
How on earth does SIROCCO achieve such a great performance? It's the combination of gas and compressed air acting like a power booster that enables SIROCCO to reach temperatures close to 800 °C with almost 12 kW at 3 bar, which by the way means...



**EASE OF HANDLING**  
**EASILY PORTABLE**

(Page 6)  
It's really amazing! Weighing barely more than a kilo, the SIROCCO is the proof that ultra-strong and ultra-light weight can be synonymous. For the leak sealing specialist, professional constraints are fully taken into consideration by the SIROCCO's particularly high comfort index rating. But it's not a first for Express, as has already been widely acknowledged...



**ACHIEVEMENT**  
**EUREKA**

(Page 12)  
A label of excellence and symbol of European industrial design, EUREKA is a major asset for SIROCCO, a symbol of innovation and technology...


[www.express.fr](http://www.express.fr)

# SUCCESS

THE TECHNICAL ACHIEVEMENTS RECORD OF GUILBERT EXPRESS

## SIROCCO FLAMELESS TORCH : A NEW ERA FOR THE WATERPROOFING-INDUSTRY



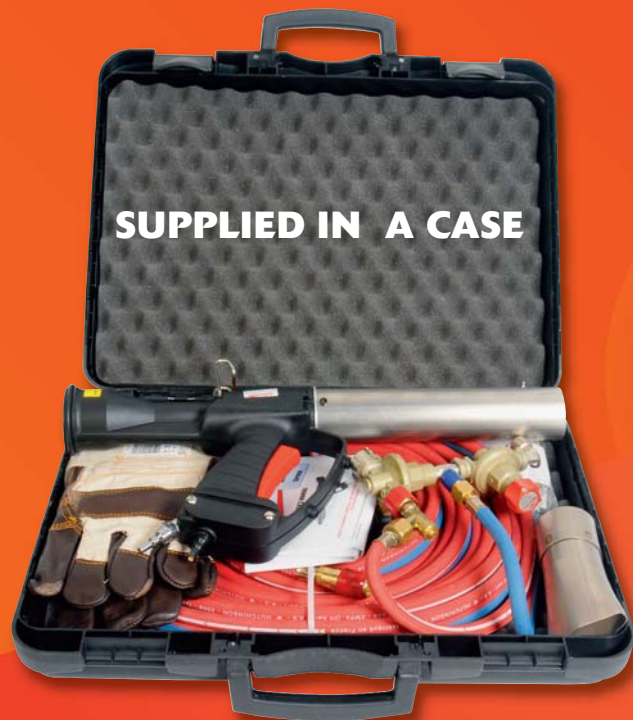


**SUPPLIED IN A CASE**

The case includes :

## A SIROCCO pistol-grip blowtorch with no visible flame



- + 1 HP regulator  
(operating range 1.5 to 3 bar)
- + 1 pre-assembled 8-metre Ø 6.3 mm  
double hose (air + gas)
- + 1 flat nozzle (small cross-section)  
70x13 mm
- + 1 pair of gloves  
and set of connectors
- + 1 support base
- + 1 operating manual

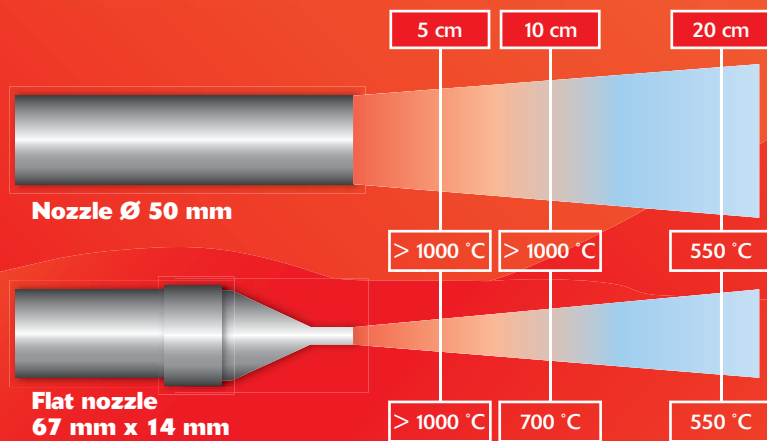

## SIROCCO Ref. 4010

|                                  |                                                  |                     |
|----------------------------------|--------------------------------------------------|---------------------|
| ENERGY SOURCE                    | Propane + compressed air                         |                     |
| OPERATING PRESSURE (bar)         | 1.5 to 3                                         |                     |
| ADJUSTABLE POWER (1.5 > 3 bar)   | from 7 to 12 kW                                  |                     |
| FLOW RATE (g/h)                  | 745 g/h to 2 bar                                 |                     |
| WEIGHT (kg)                      | < 1kg                                            |                     |
| AIR CONSUMPTION (l/min at 2 bar) | 10,2                                             |                     |
| SAFETY DEVICE                    | Safety handle                                    |                     |
| EXCESS FLOW                      | Excess flow safety device on regulator gauge     |                     |
| ADJUSTABLE ACCESSORIES           | Thermal reflector<br>Anti-obstruction "Air" clip |                     |
| AIR COMPRESSOR REQUIRED          | Output :<br>Over 20 l/min                        | Pressure :<br>6 bar |

Distributor's stamp

Tel.: +33 1 53 99 16 98 • Fax: +33 1 53 99 16 56

[www.express.fr](http://www.express.fr)