



PA Series

Variable Area Flowmeter

- Field indicated Flow meter for use without power supply
- Designed to fit into small spaces for easy installation in general factory piping lines and panels
- Easily check the flow of fluid (bubble, color, etc.)


PA-30 Series General Specifications

Size	3/8" ~ 1"
Process Connection	PT(F)
Flow Ranges	Water - 0.3 L/min ~ 100 L/min
Range Ability	10 : 1
Accuracy	±2.0 % F.S
Fluid Temperature	Max. 120 °C
Max. Pressure	Max. 10 kgf/cm2.G

MODEL CODE

PA-30	-	□	Specification
		S	304SS or 316SS
		P	PVC or CPVC
		T	PTFE

STRUCTURAL DRAWING

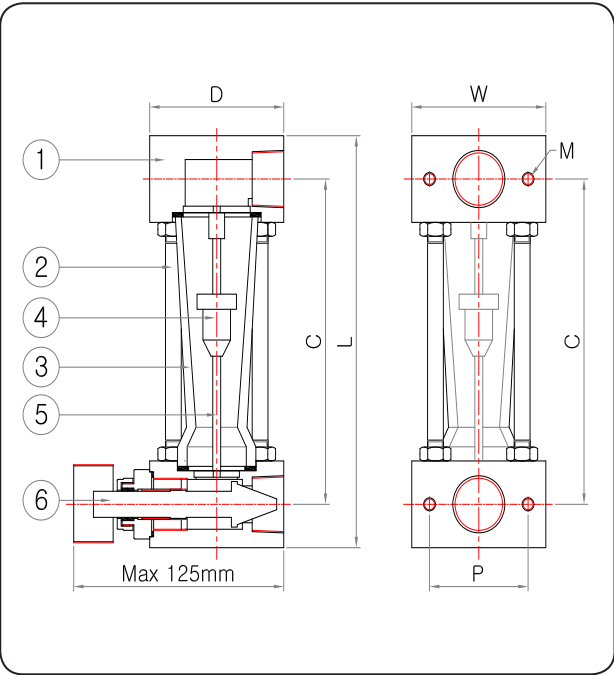

STANDARD MATERIAL

No.	Description	Material		
		S	P	T
1	Body	304SS	PVC	PTFE
2	Support bar	304SS		
3	Taper tube	PYERX GLASS		
4	Float	304SS	PVC	PTFE
5	Guide bar			PTFE LINER
6	Valve			PTFE

FLOW RANGES & DIMENSIONS

Size		Water	Air	Length (mm)			
		L/min	NL/min	L	C	D	P
15A	1/2B	2 - 50	100 - 1000	190	150	68	68
20A	3/4B	4 - 80					
25A	1B	5 - 100	140 - 1400	210	160	68	68