



KFM Series

Pitot Tube Flow meter
Low Permanent Pressure Loss

■ KFM Series General Specifications


Size	10A (3/8") - 300A (12")
Process Connection	Flange type - KS / JIS / ANSI / ASME / DIN Std. Taper Pipe Thread type (PT) Insertion type
Measuring Fluid	Water, Air
Accuracy	±2.0 % F.S
Fluid Temperature	-30 °C ~ 200 °C
Max. Pressure	Max. 30 kgf/㎠.G

■ MODEL CODE




K F M	-	□□□	Specification
		301	Single Support Type 저압(10 kgf/㎠.G이하)및 Duct에 적합하며 3B ~ 16B 배관에 적용 가능하고 설치가 간편하다.
			Double Support Type 고압에 적합하며 10B ~ 120B 배관에 적용 가능하고 빠른 유속에 대응 할 수 있는 구조이다.
		302	

HOW TO INSTALLATION



1. 수직 배관인 경우 수평면상의 위치에 설치해야 한다.

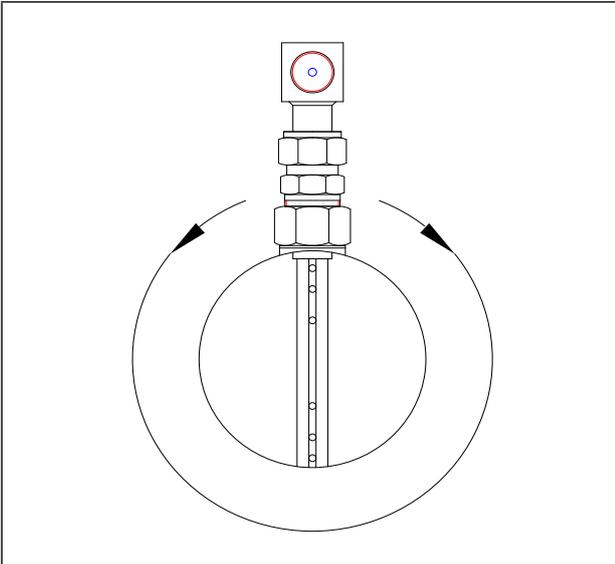

2. 취부 각도의 허용 오차 범위

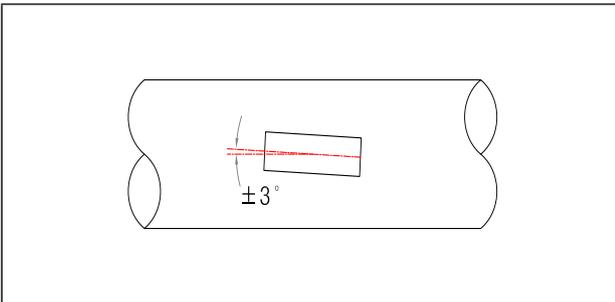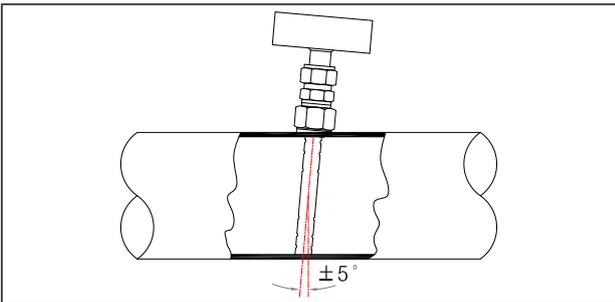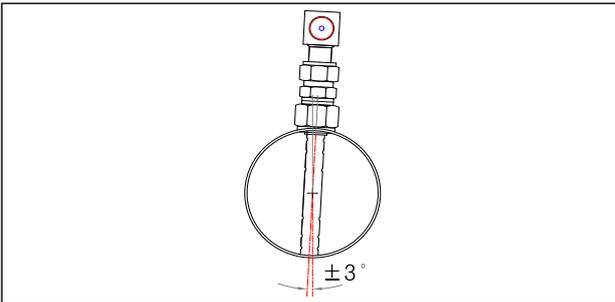

3. 수평배관 상태의 유체가 액체인 경우 PITOT TUBE 내에 공기 등의 기체가 들어가지 않도록 배관의 하단부에 설치 하는 것이 적합하다.

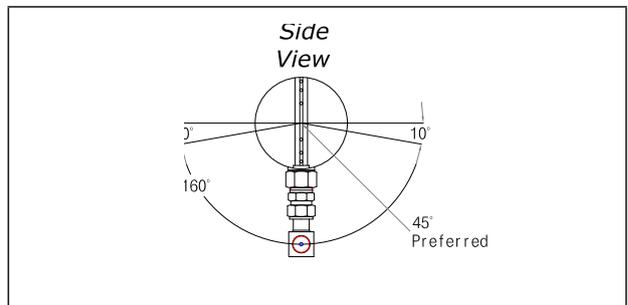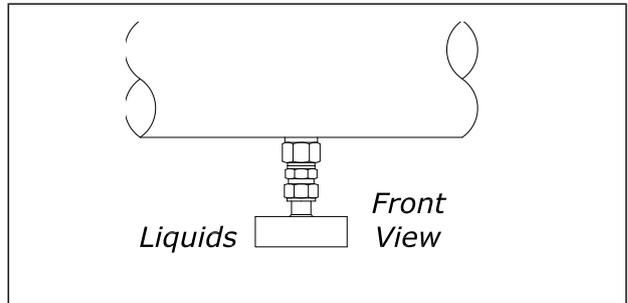

4. 수평배관 상태의 유체가 기체인 경우 PITOT TUBE 내에 액체 등이 들어가지 않도록 배관의 상부에 설치하는 것이 적합하다.

