



PA Series

Variable Area Flowmeter

- Field indicated Flow meter for use without power supply
- Designed to fit into small spaces for easy installation in general factory piping lines and panels
- Easily check the flow of fluid (bubble, color, etc.)

PA-81 Series General Specifications

Size	6A (1/4") ~ 15A (1/2")
Process Connection	NPT
Measuring Fluid	Liquid
Accuracy	±4.0 % F.S
Fluid Temperature	Max. 65 °C
Max. Pressure	Max. 6 kgf/cm ² .G

MODEL CODE

PA-81	-	□	-	□	Specification
		1 ~ 3			Refer to Flow ranges Bottom side to Top side
			V		Valve


FLOW RANGES

Model	Measure Range		Coonection
	GPM	LPM	
PA-81-1	0.1 - 1	0.5 - 4	1/2" NPT
PA-81-2	0.2 - 2	1 - 7	
PA-81-3	0.5 - 5	2 - 18	

STANDARD MATERIAL

No.	Description	Material
1	Body	Machined acrylic
2	Adapter	Polypropylene
3	O-ring	Viton
4	Float	SUS316
5	Guide bar	SUS316

STRUCTURAL DRAWING

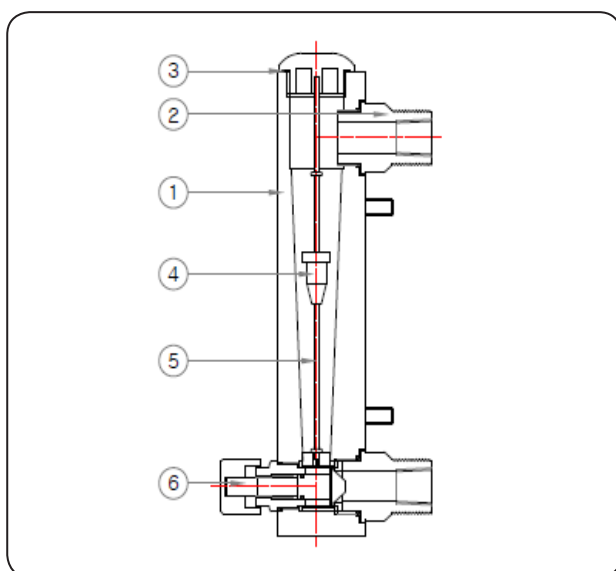

DIMENSIONS DRAWING

