


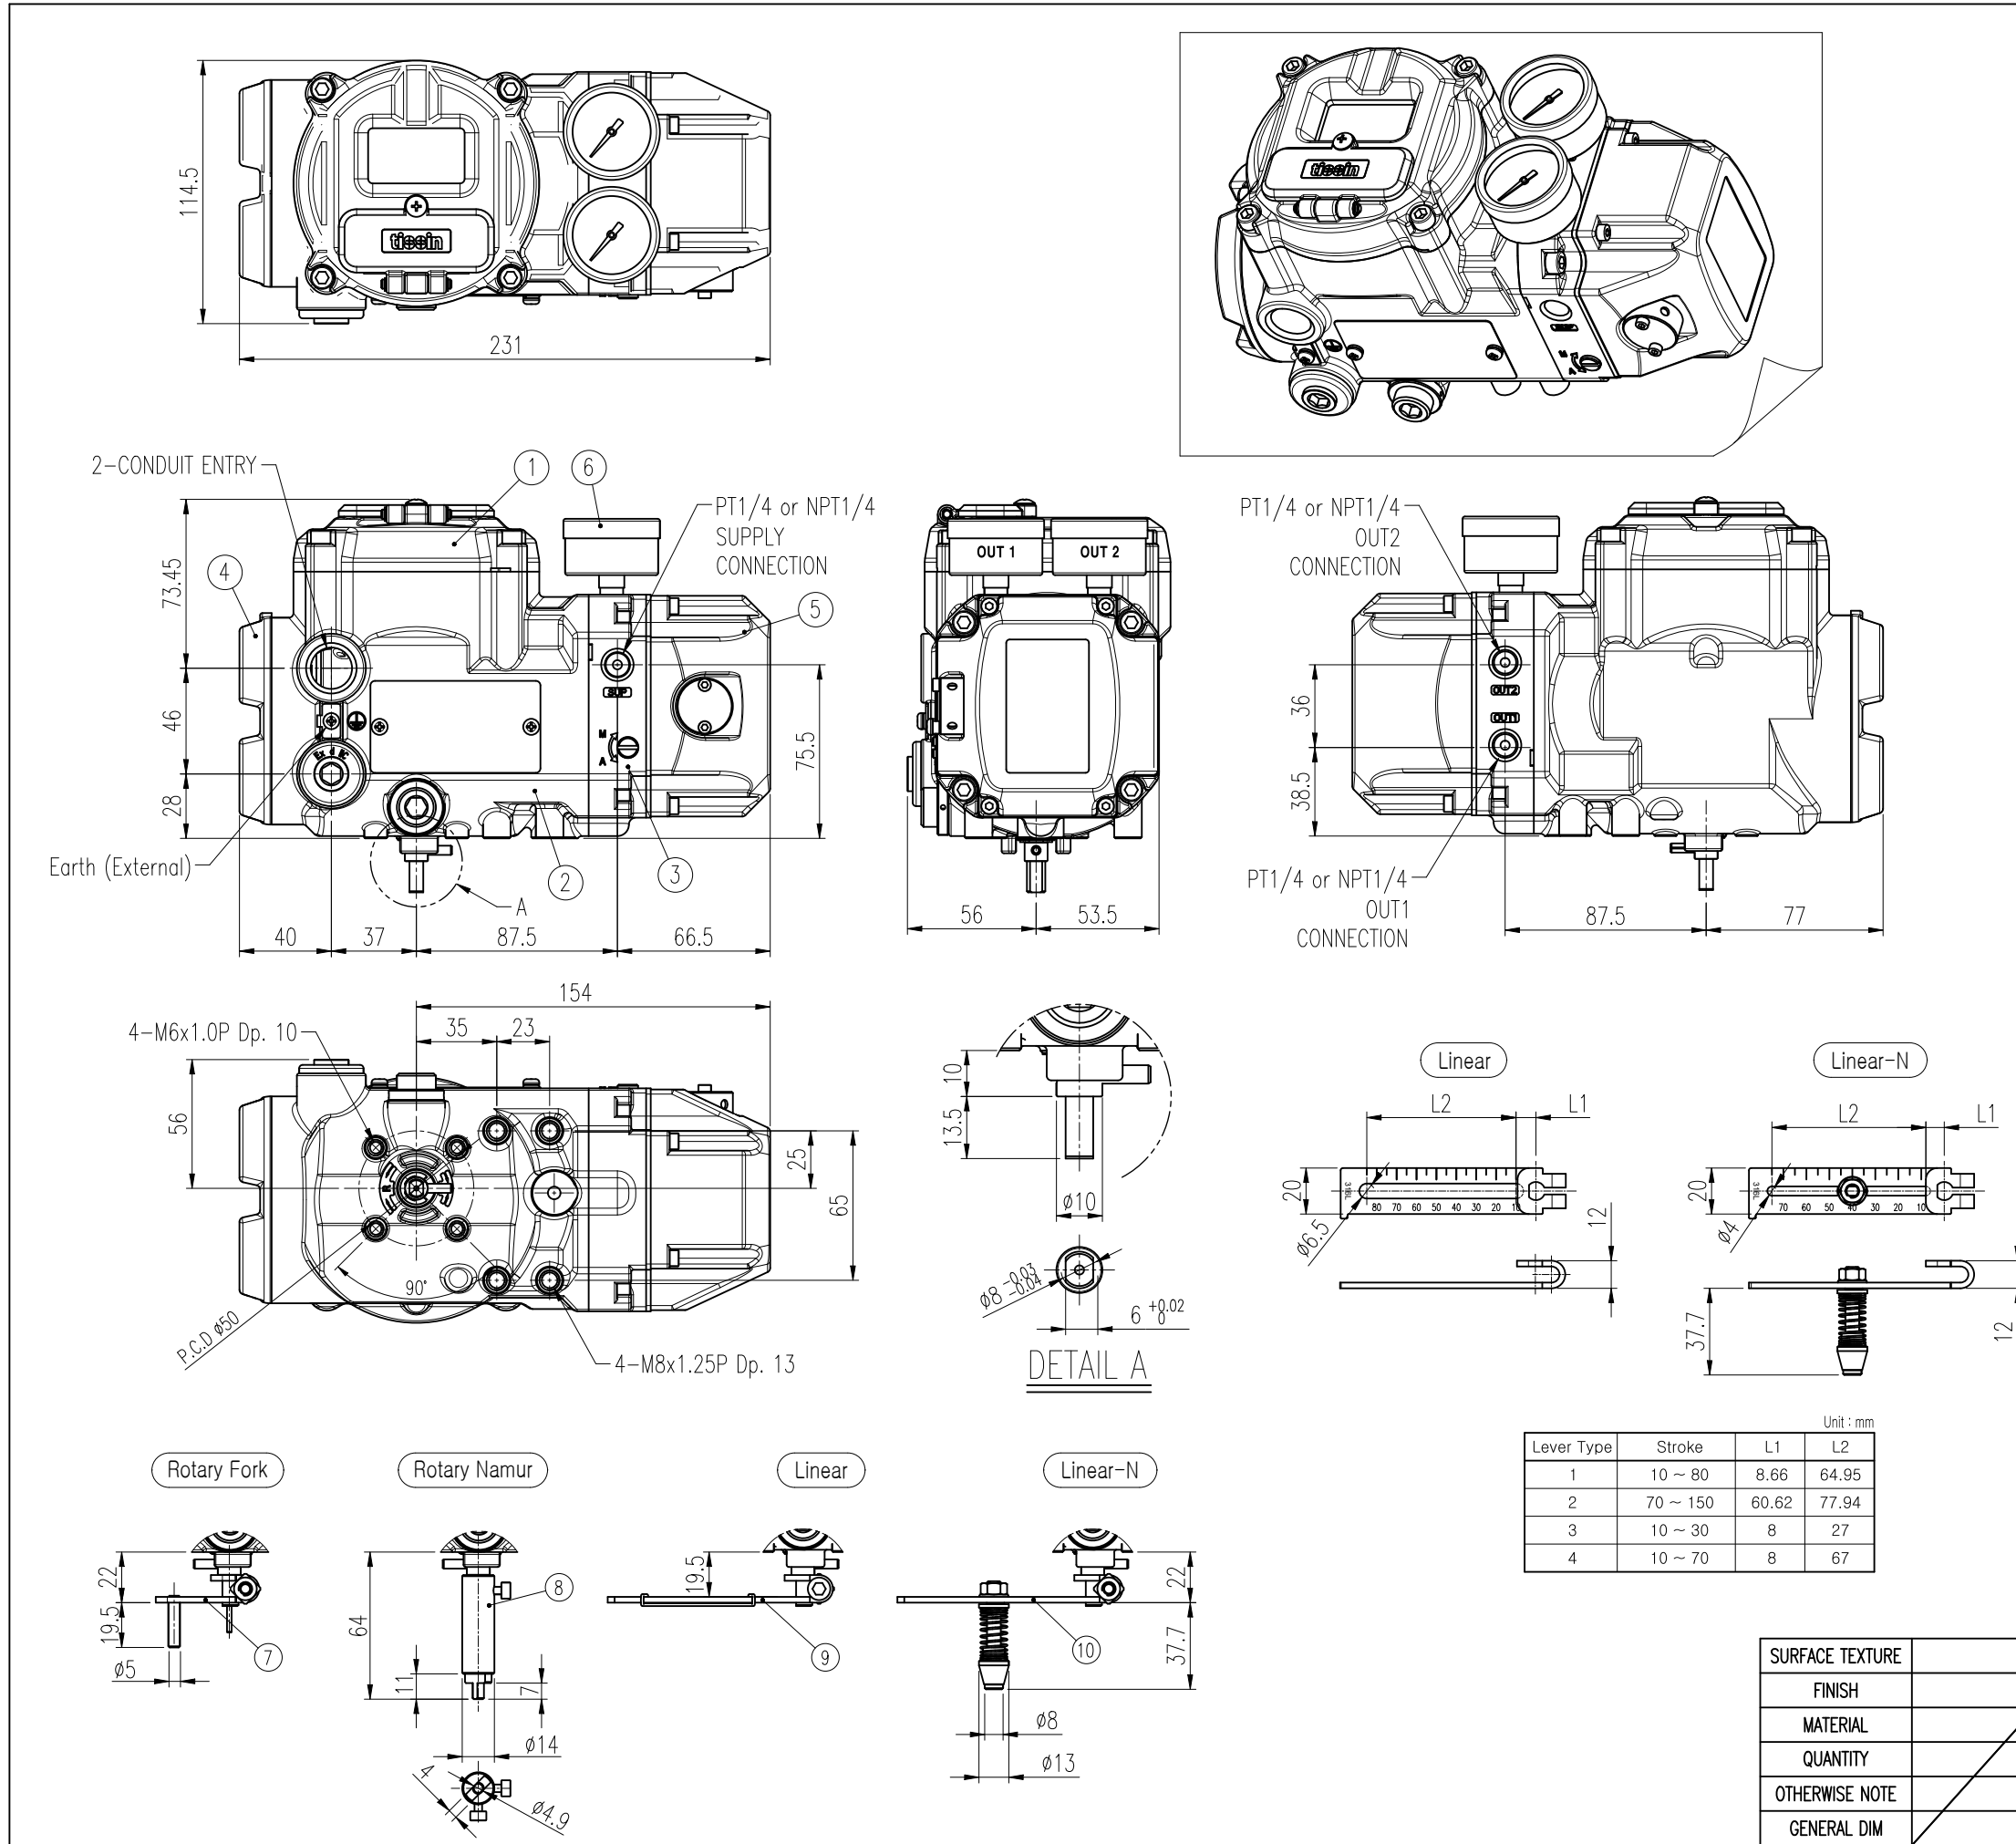

NO.	DATE	REVISION	DESIGNED	CHECKED	APPROVED
△0	220221	RELEASED	SHYEOM	-	DKMIN
△1					

PART LIST

10	FEEDBACK LEVER (LINEAR-N)	STS316	1
9	FEEDBACK LEVER (LINEAR)	STS316	1
8	FEEDBACK LEVER (ROTARY NAMUR)	STS316	1
7	FEEDBACK LEVER (ROTARY)	STS316	1
6	PRESSURE GAUGE	STS316	1 or 2
5	COVER PILOT	SCS14	1
4	COVER TERMINAL	SCS14	1
3	BLOCK GAUGE	SCS14	1
2	BODY BASE	SCS14	1
1	COVER BASE	SCS14	1
NO.	PART NAME	MATERIAL	Q'TY

SPECIFICATIONS

Acting Type		Single or Double
Input Signal		4 ~ 20mA
Impedance		Max 450 Ω / 20mA DC
Working fluid		Compressed air
Max. working pressure		0.7 MPa
Min. working pressure		0.14 MPa
Air Consumption (sup=0.14MPa)		<2.3 LPM
Flow Capacity (sup=0.14MPa)		>100LPM
Ambient Temp.	Standard Type	-30°C ~ 80°C (Non-Explosion)
	Low Temp. Type	-40°C ~ 80°C (Non-Explosion)
	Explosion Proof	-40°C ~ 80°C (T5)
		-40°C ~ 70°C (T6)
LCD Operating		-30°C ~ 85°C
Explosion Proof		Ex db IIC T5/T6 Gb Ex tb IIC T100°C/T85°C Db
Enclosure		IP66
Air Connection		PT1/4 or NPT1/4
Gauge Connection		PT1/8 or NPT1/8
Conduit entry		NPT 1/2 or M20
Pressure Gauge		Ø42, Max. 0.8MPa
Stroke	Linear	10 ~ 150mm
	Rotary	0~90°
Linearity		±0.5% F.S.
Hysteresis		±0.5% F.S.
Sensitivity		±0.2% F.S.
Repeatability		±0.3% F.S.
Housing Material		STS316
Weight		7.0kg
Internal free volume		1,050cm³

SURFACE TEXTURE		WEIGHT	g	PROJECT		
FINISH		SHEET No.	1 / 1	PRODUCT NAME	SMART POSITIONER	
MATERIAL		UNIT	mm	MODEL	TS905	
QUANTITY		SCALE	1 / 3	TITLE	TS905 AA 01 A1	REV.
OTHERWISE NOTE		PROJECTION	3RD ANGLE			
GENERAL DIM		DWG SIZE	A3	DWG. NO.		0