

FOR 18L SQUARE CANS





WITH 10 TESTING HEADS


UP TO 50 CPM AUTOMATIC CAN HEIGHT ADJUSTMENT AUTOMATIC LEAKING CAN EJECTION



AIR PRESSURED TESTER



- Leak detection thanks to very sensitve pressure difference transducer
- Test pressure around 120 mbars (1.75 PSI)



Located at the end of the machine, a pneumatic ejector allows to reject automatically the faulty cans



- Reject point adjustable from the control pannel
- Tests results can be saved to a USB drive USB



TECHNICAL FEATURES


Cans size and Speed From 160x160mm to 235x235mm up to 50 CPM


Sensitivity at 50CPM the smallest detectable leak on a 20 liters container is

equivalent to a hole diameter of 0.5mm

Can heights 90 to 410mm

2kW Power consumption

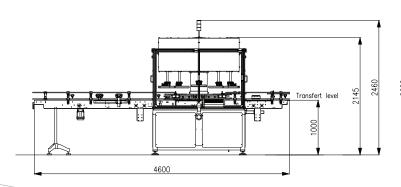



Sabatier SAS Nº 31 Avenue de Rome F-13127 Vitrolles

Phone +33 442 46 94 00

E-Mail info@sabatier.f www.sabatier.fr

