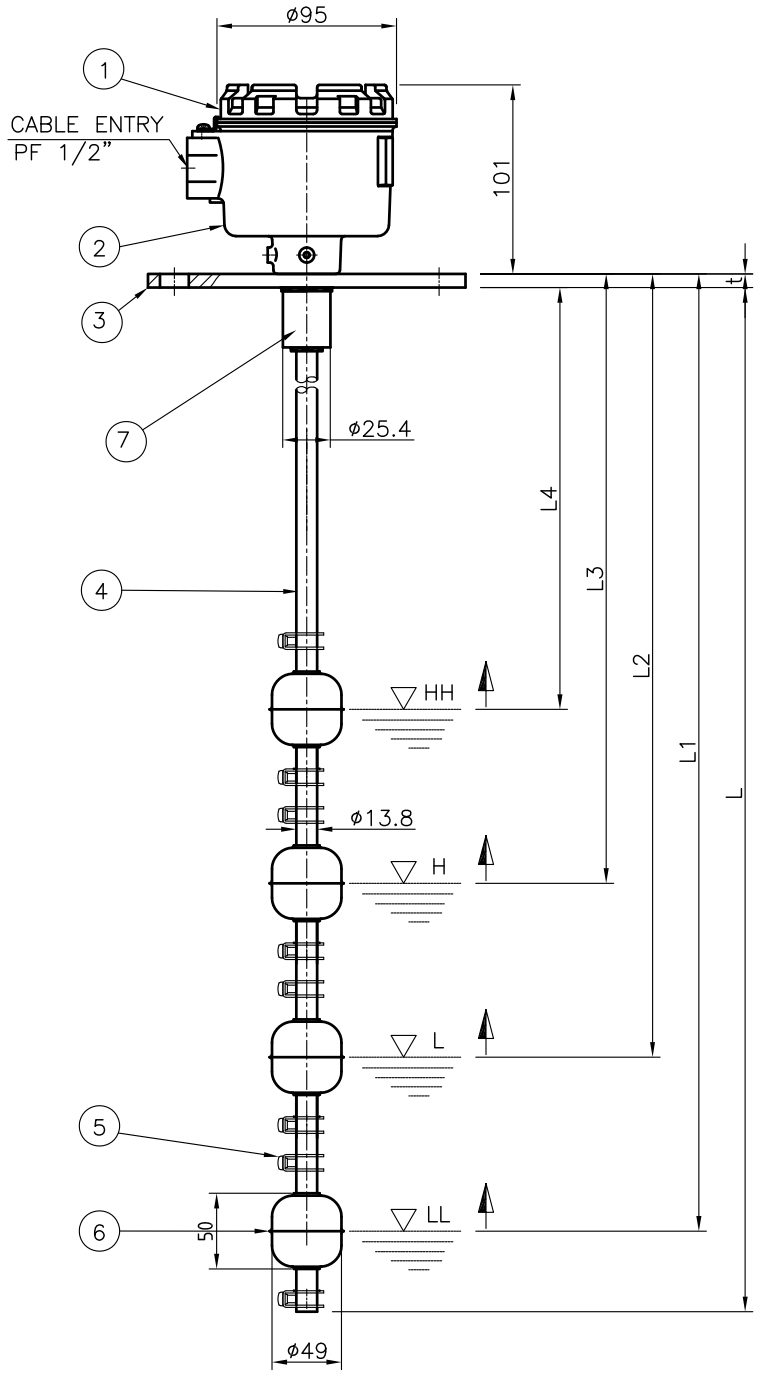

WIRING DIAGRAM

ELECTRIC RATING (RESISTIVE)	
MAX.CONTACT RATING	50W / 70VA
MAX.SWITCHING CURRENT	0.5A
MAX.SWITCHING VOITAGE	350VDC 300VAC

DESIGN DATA

CODE		N/A	
UNIT		mm	
KIND OF FLUID		−	
PRESS.	DESIGN	−	Kg/Cm²
	OPERATING	−	Kg/Cm²
TEMP. (SENSOR)	DESIGN	−20 ~ 80	˚C
	OPERATING	−	˚C
TEMP. (ELECTRONICS)	DESIGN	−20 ~ 60	˚C
	OPERATING	−	˚C
SP.GR.		MORE THAN 0.74	
VISCOSITY		10 P / 1 Pa.s	
ENCLOSURE		WEATHER PROOF	
FLANGE SIZE		JIS 10K 80A FF(6T)	
FLOAT TYPE		ø49x50L	

TAG NO.	L	L1	L2	L3	L4
	−	−	−	−	−

NOTES

1. ( ) Dimensions are reference dimensions.

REVISION

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
7	COULPING	316SS	1		
6	FLOAT	316SS	4		
5	FLOAT STOPPER	316SS	8		
4	STEM	316SS	1	ø13.8	
3	FLANGE	316SS	1		
2	HOUSING	ADC12	1		
1	COVER	ADC12	1		

BILL OF MATERIAL

CUSTOMER: −

PROJECT: −

TITLE: FLOAT TYPE LEVEL SWITCH
ST−4S−D−2−B−1−A−1−B−3
ASSEMBLY DRAWING

MANUFACTER: SeoJin Instech Co.,Ltd.

SCALE	ERP CODE	Work Order No.	REV.
N/S	−	−	0

DWG NO. SJ−M003−DWG−AP026