

Pulsation dampener

Model : A040

Spec. sheet no. AD00-04

Service intended

It is used for reducing the pressure pulsation flowing from pump or air compressor in order to facilitate pressure gauge reading.




Standard features

Max. working temperature : 232 °C

Packing : PTFE (-54 ~ 232 °C)

Max. static pressure up to 35 MPa

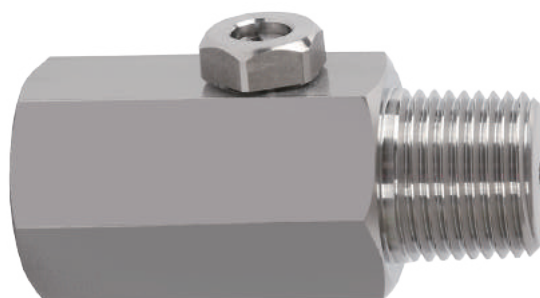

※ This product's Max. working temperature could be varied depending on its working pressure and temperature.

Main order

Ordering information

1. Base model

A040 Pulsation dampener

2. Unused type

A None

3. Material

D 316SS
F 316L SS
G Monel
Z Other

4. Gauge connection size

0 1/4"
1 3/8"
2 1/2"
9 Other

5. Gauge connection type

A PF (F)
B PT (F)
C NPT (F)
Z Other

6. Process connection size

B 1/4"
C 3/8"
D 1/2"
Z Other

7. Process connection type

G PF (M)
H PT (M)
J NPT (M)
Z Other

8. Unused character

A0000 None


Sample ordering code

1	2	3	4	5	6	7	8
A040	A	D	0	A	B	G	A0000

© WISE Control Inc. All rights reserved. ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

WISE®

A040 : Type of mounting

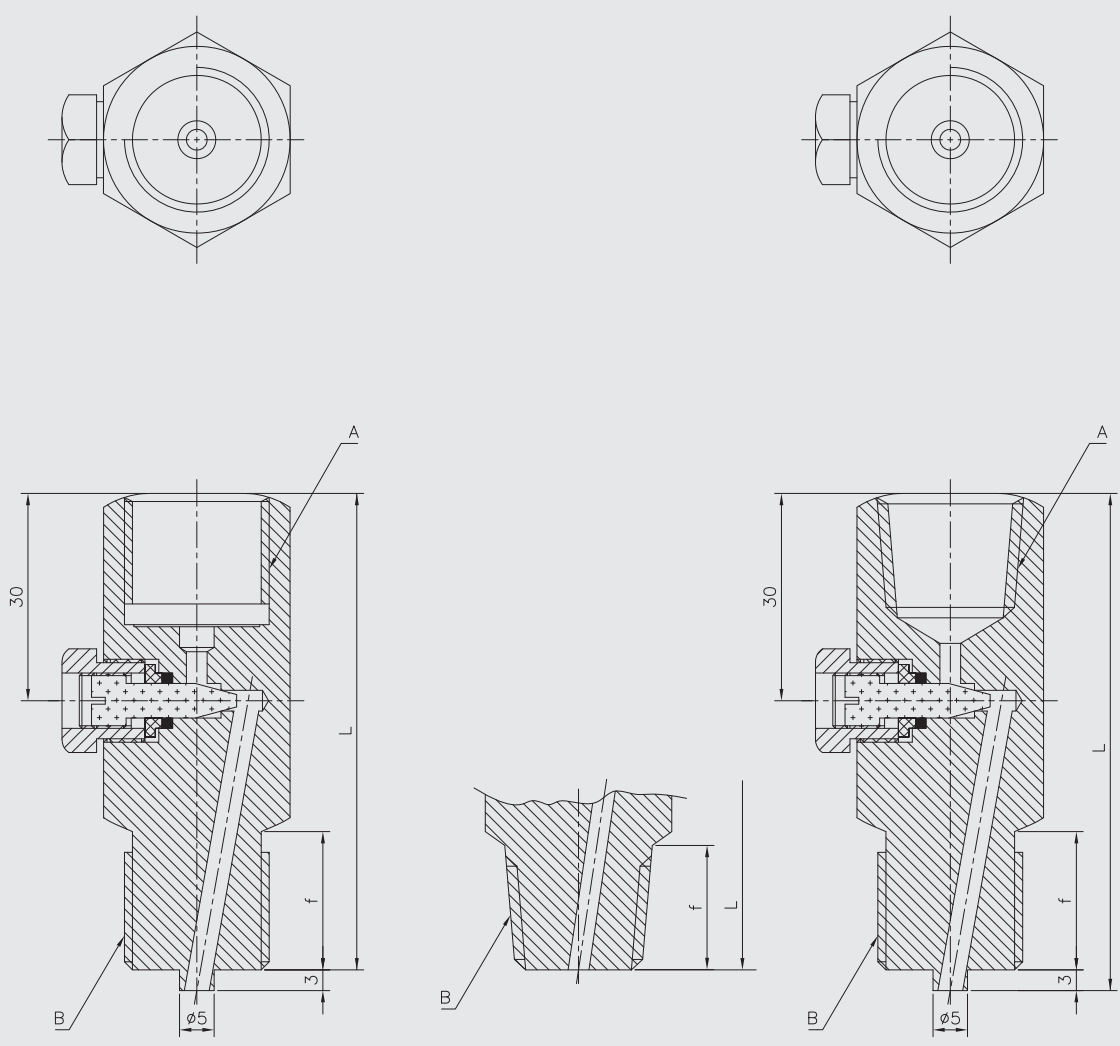

Dimensions (mm)

A	B	f	L
PF3/8	PF3/8	18	63
	PF1/2	20	63
PF1/2	NPT3/8	16	63
	NPT1/2	18	63
NPT3/8	PF3/8	18	63
	PF1/2	20	63
NPT1/2	NPT3/8	16	63
	NPT1/2	18	63