


Winding Type Current Transformer (1.15kV)

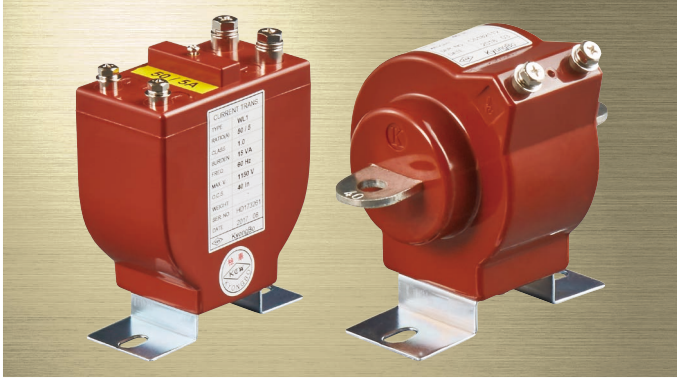

- 옥내용 (For Indoor)
- 권선형 (Winding Type)
- 일반 계기용 (For Metering)
- 취부방향을 90° 회전 가능함으로 취부 편리함
- 1차 전류가 낮아 많은 도체를 관통하기 어려운 전류 용량에 적합

Specification

Service	Type	Primary Current (A)	Secondary Current (A)	Accuracy Class (%)	Burden (VA)	Weight (kg)	Remark
Metering	WL1	5 ~ 50	1 or 5	1.0 or 3.0	5 ~ 40	≒ 1.2	Single Ratio
	WL2	B 40 ~ 150			5 ~ 15	≒ 1.0	
		C 200 ~ 300				≒ 1.0	
		D 400 ~ 500				≒ 1.0	
	WL3	B 40 ~ 150			40	≒ 1.2	
		C 200 ~ 300				≒ 1.2	
		D 400 ~ 500				≒ 1.2	
	WLD1	10 ~ 50 5 ~ 25			5 ~ 15	≒ 1.2	Double Ratio
	WLD2	B 40 ~ 150 20 ~ 75			5	≒ 1.0	
		C 200 ~ 300 100 ~ 150				≒ 1.0	
		D 400 ~ 500 200 ~ 250				≒ 1.0	
	WLD3	B 40 ~ 150 20 ~ 75			15	≒ 1.2	
		C 200 ~ 300 100 ~ 150				≒ 1.2	
		D 400 ~ 500 200 ~ 250				≒ 1.5	

※ Application Standard : KS C 1706, IEC 61869-2, JEC 1201, IEEE C 57.13 etc.

※ Rated Frequency : 60 Hz (Others on request)

※ Insulation Level : 1.15 kV / 4 kV / -


※ Short time current : 40 In / 1 second

※ Short time current being subject to 25% rated burden connection at secondary side for all ratios.


※ 주문사양에 따라 Accuracy Class는 0.3, 0.5 Class 등 다양하게 제작이 가능합니다.

Dimension & Drawing

WL1 or WL(D)1

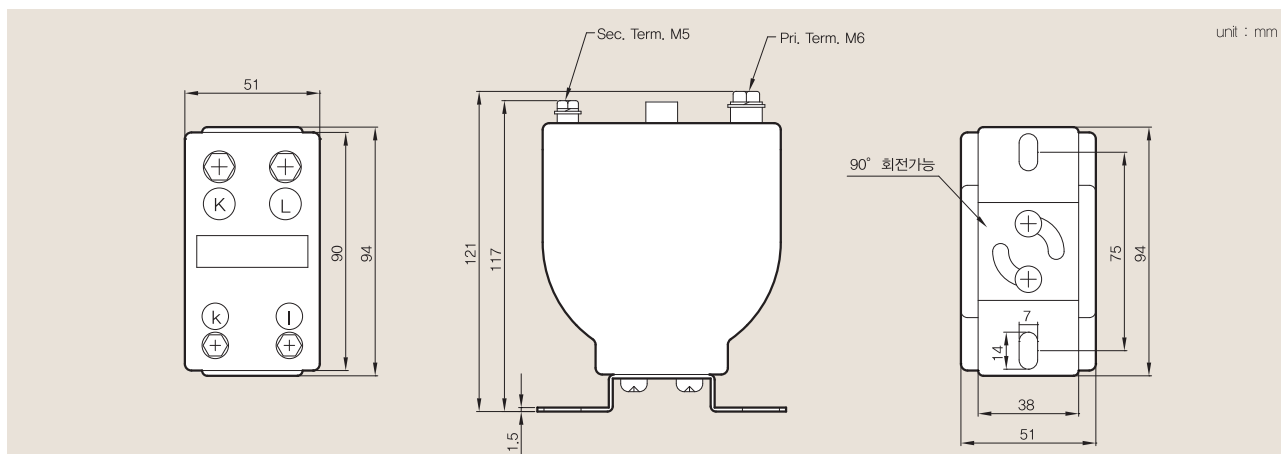

WL(D)2 or WL(D)3

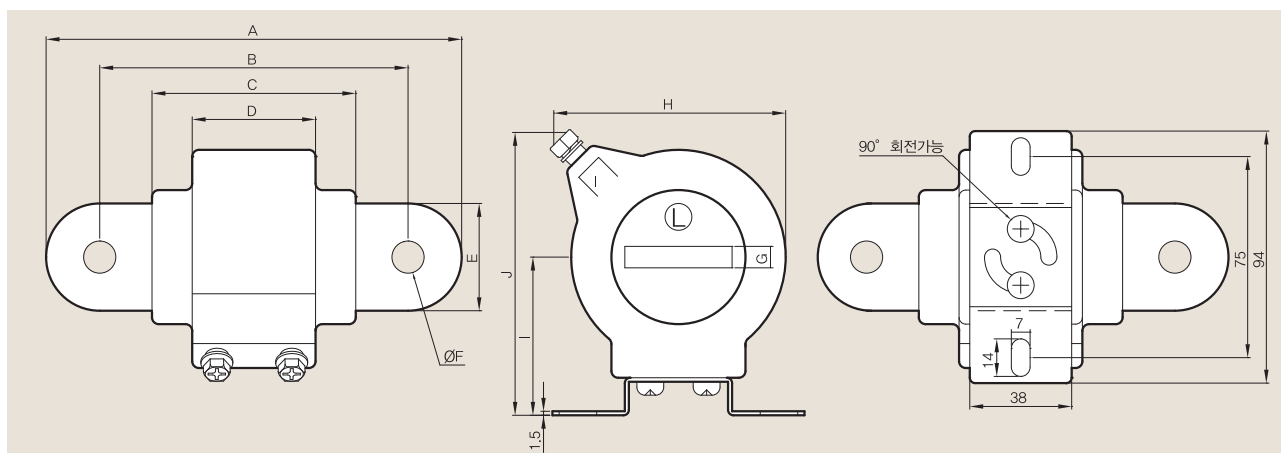

unit : mm

Type	Pri. Cur. Terminal	A	B	C	D	E	F	G	H	I	J
WL2 WLD2	B	125	100	76	46	25	Ø10	3.2	86	59	105
	C	135	105	76	46	30	Ø10	6			
	D	155	116	76	46	40	Ø12	8			
WL3 WLD3	B	130	105	81	51	25	Ø10	3.2	95	64	114
	C	140	110	81	51	30	Ø10	6			
	D	160	120	81	51	40	Ø12	8			