

TROLLEY


DAESAN plain and geared trolleys are light and easy to adapt to a wide range of beams. The trolley wheels include lifetime ball bearings for maintenance free operation.

Bearings : Shielded, lifetime lubricated, single row ballbearings.

Wheels : Crown tread allows operation on tapered or flat flange beams with increased durability.

Suspension Lug : Pivot mounted suspension shaft designed to equally distribute the load to all wheels.

Hand Chain Box : Equipped from 20ton or above capacity gear trolley for better protection.

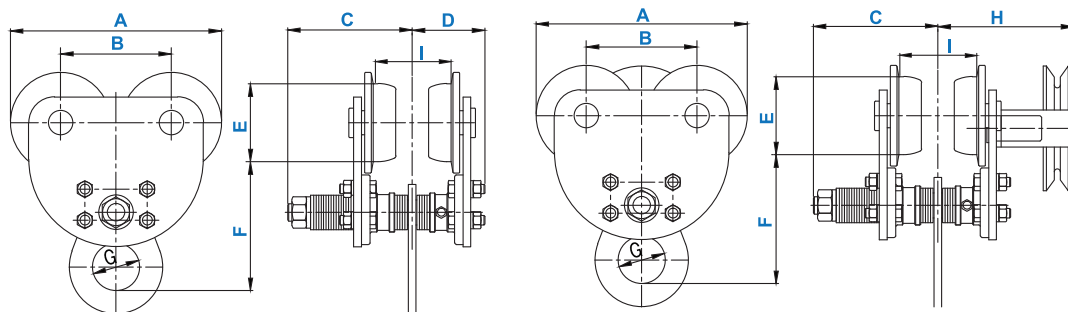


DP,DG TYPE

MODEL NO :	DP(Plain trolley)	DP05	DP1	DP2	DP3	DP5	DP10	N/A	N/A	N/A	N/A
	DG(Geard trolley)	N/A	DG1	DG2	DG3	DG5	DG10	DG15	DG20	DG30	DG40
Capacity (ton)		0.5	1	2	3	5	10	15	20	30	40
Hand chain operation length (m)		N/A	2.5	3	3	3	3.5	3.5	3.5	3.5	3.5
Min curve radius (mm)		1000	1300	1500	2000	2500	2600	3000	N/A	N/A	N/A
A (Dimension) (mm)		174	233	271	312	352	352	505	1131	1312	1312
B		90	122	142	163	183	183	255	712	776	776
C		142.5	142.5	160	168.5	184.5	249	211	291.5	302	302
D		76	76	93	100.5	115	126	N/A	N/A	N/A	N/A
E		55	80	100	113	125	125	254	150	154	154
F		1295	128	165	190	230	253.5	337.5	434	457.5	457.5
G		45	45	60	67	77	70	80	122	122	122
H		N/A	164	176	183	198.5	199.5	283	291.5	302	302
I		75-125	75-125	100-150	100-150	125-175	125-200	175-200	175-200	175-200	175-200
Net weight DP TYPE (Standard) (kg)		6	10	18.5	29	45	68	N/A	N/A	N/A	N/A
Net weight DG TYPE (Standard) (kg)		N/A	14	23	35	50	78	210	320	450	500

*(I : applied I-beam width)

*C,D,H figures are for minimum beam width. Figures will be changed accordingly when applied beam width increases.

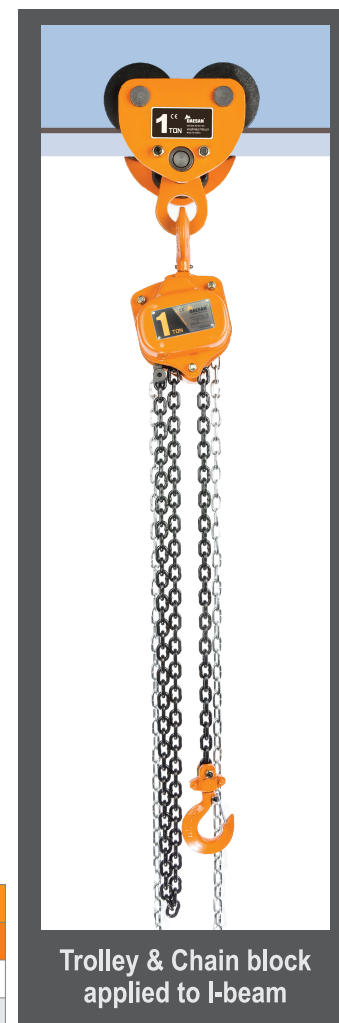

PLAIN TROLLEY(DP)



GEARED TROLLEY(DG)

