



제품명 Model	전원 Source (V)	날개크기 Impeller Size (cm)	주파수 Fre- quency (Hz)	전류 Currecnt (A)	소비전력 Power Input (W)	회전수 Revolution per minute (RPM)	극수 Pole (P)	최대풍량 Air Volume (CMM) (CFM)		최대정압 Air Pressure (mmAq) (pa)		중량 Weight (kg)
DAC-1003	1Ø 220V	10	50 60	0.15 0.15	29 30	1,420 1,680	4	5.2 6.2	185 220	3.4 4.7	35 45	3.2
DAC-1004	1Ø 220V	10	50 60	0.18 0.18	32 34	1,385 1,610	4	6.5 7.6	230 270	3.3 4.5	30 45	3.5
DAC-1005	1Ø 220V	10	50 60	0.32 0.32	56 61	1,440 1,710	4	8.8 10.5	310 370	3.2 4.5	30 45	3.9
DAC-1006	1Ø 220V	10	50 60	0.35 0.33	61 66	1,420 1,680	4	10.5 13	370 460	3.1 4.3	30 40	4.3

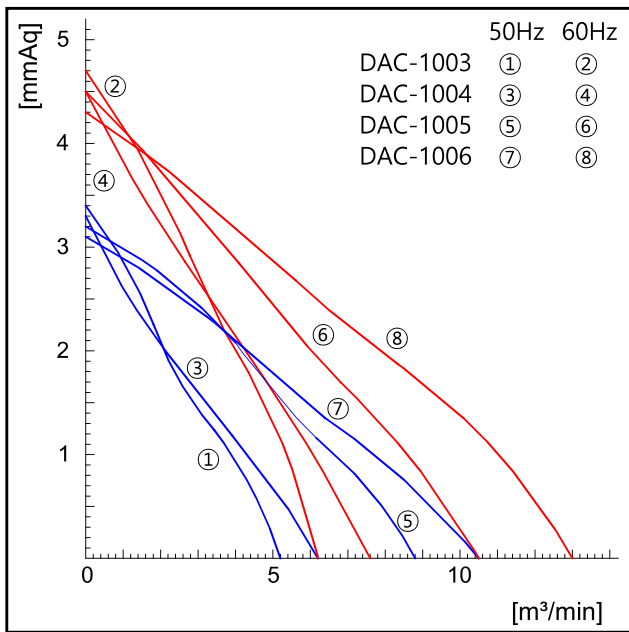

Dimension (mm)					
Model	A	B	C	D	E
DAC-1003	276	256	189	266	298
DAC-1004	378	358	291	368	400
DAC-1005	449	429	362	439	471
DAC-1006	501	481	414	491	523

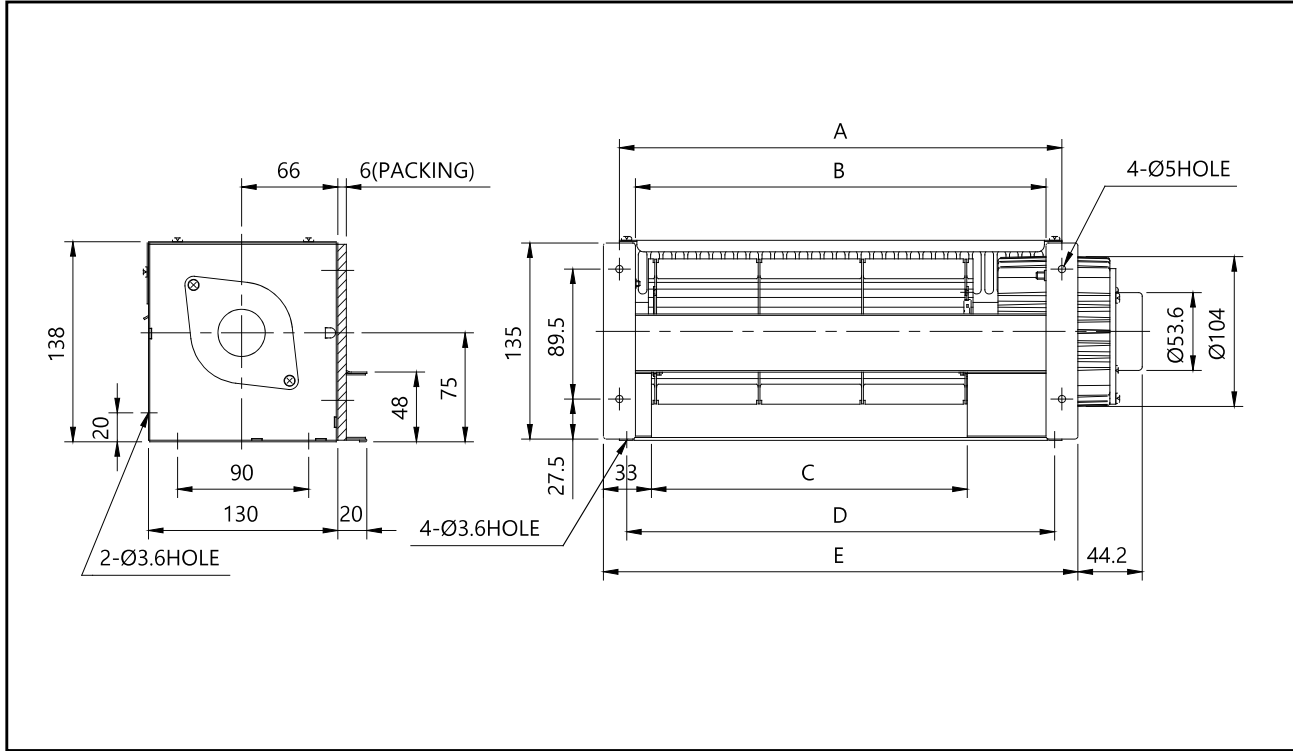

◆ 제품 특징

- 저소음, 다풍량의 CROSS FLOW FAN
- 흡입된 바람을 본체의 원주를 따라 횡방향으로 토출하므로 균일한 바람을 얻을 수 있음
- 와류발생이 적어서 토출되는 공기의 흐름이 집중되어 멀리까지 도달되고, 소음이 적음
- 직각으로 구부러지는 바람의 흐름과 직방체 모양을 살려 SET의 모서리에 설치 할 수 있어서 공간활용에도 매우 효과적임.

◆ 제품 사용장소

- 각종 기기냉각용
- 냉,온풍기, 산업용기계, 에어컨튼용, 필름건조기, FAN COIL UNIT

◆ Feature

- Low sound, High blow CROSS FLOW FAN
- Distribution of air velocity is uniform.
- Less parasitic air. Compact air-flow blowing. Less sound. Air flow will be reached far.
- Wind flow as the corner.
- Retangular shape will make the blower install at the corner, it means the blower is saving-space type.

◆ Available place

- Refrigeration and cooling.
- Refrigerator & heater, industrial machine, air-curtain, film mammography, FAN COIL UNIT