


제어용 스위치류

7-3

키 스위치(A형)
Key Switch (A Type)

형식 구분도 | Type Classification Diagram |

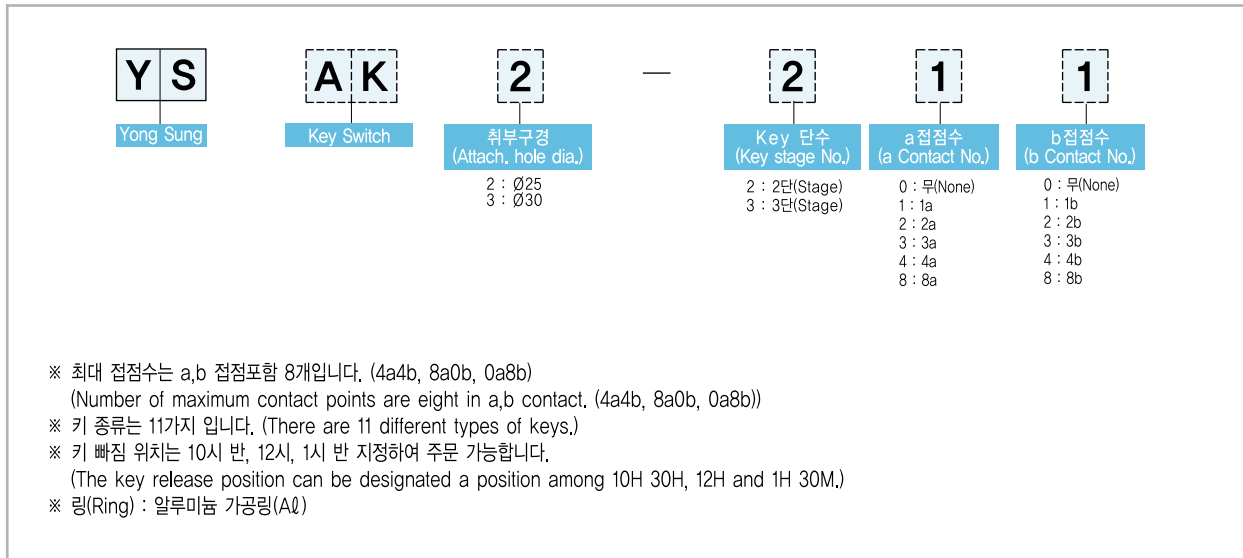

성능 개요 | Performance Summary |

절연저항 (Insulation resistance)	Above 100MΩ (DC 500V. Meg)
접촉저항 (Contact resistance)	Below 50mΩ (Initial value)
내전압 (Withstand voltage)	AC 2,500V/min (60Hz)
기계적수명 (Mechanical lifetime)	Above 500,000 times (20 times/min)
전기적수명 (Electrical lifetime)	Above 100,000 times (20 times/min)
사용주위온도 (Ambient temperature)	-20℃ ~ +55℃
상대습도 (Relative humidity)	45 ~ 85%

접점 정격 | Contact Rated |

정격절연전압 (Rated insulation voltage)		AC600V, DC250V		
정격통전전류 (Rated conductive current)		10A		
AC	정격사용전압 (Rated voltage)	110V	220V	440V
	저항부하 (Resistive load)	10A	6A	3A
	유도부하 (Inductive load)	5A	2.5A	1.2A
DC	정격사용전압 (Rated voltage)	110V	125V	220V
	저항부하 (Resistive load)	2.2A	1.9A	1.1A
	유도부하 (Inductive load)	1.1A	1.0A	0.6A

CONTROL SWITCHES



Key 동작 방향 | Key Operating Direction |

2단 (2 stage)	3단 (3 stage)
	



외형 / 치수도 | Shape / Dimension Drawing |

(unit : mm)

Ø25

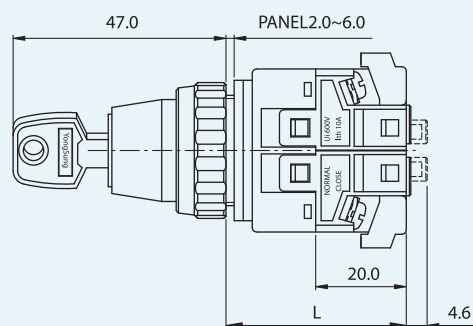

Ø30

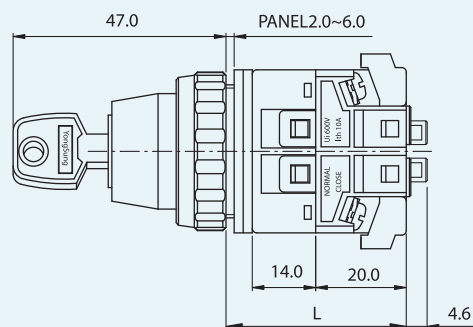제어용
스위치

Key 빠지는 위치 | Key Release Position |

2단 (2 stage)		3단 (3 stage)		
Left	Right	Left	Center	Right
				