
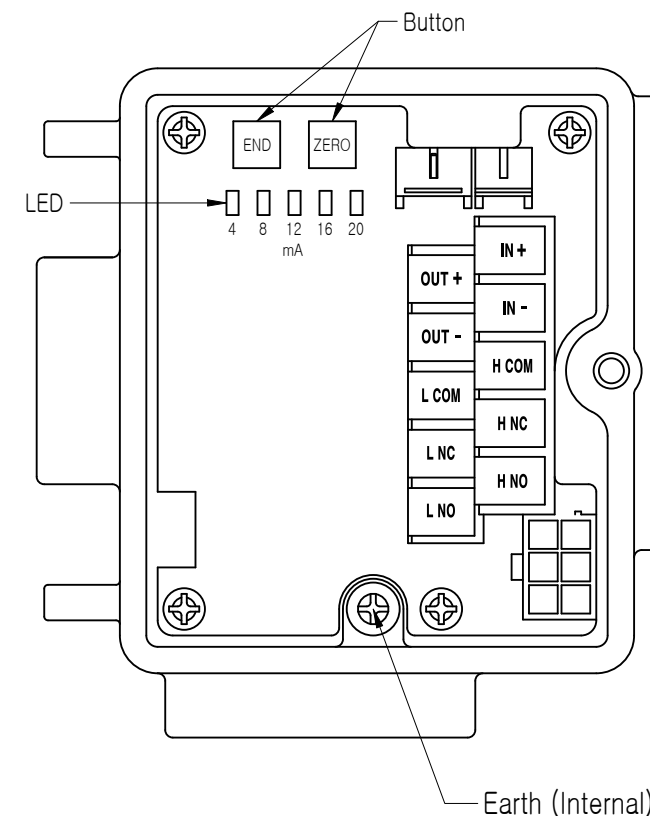
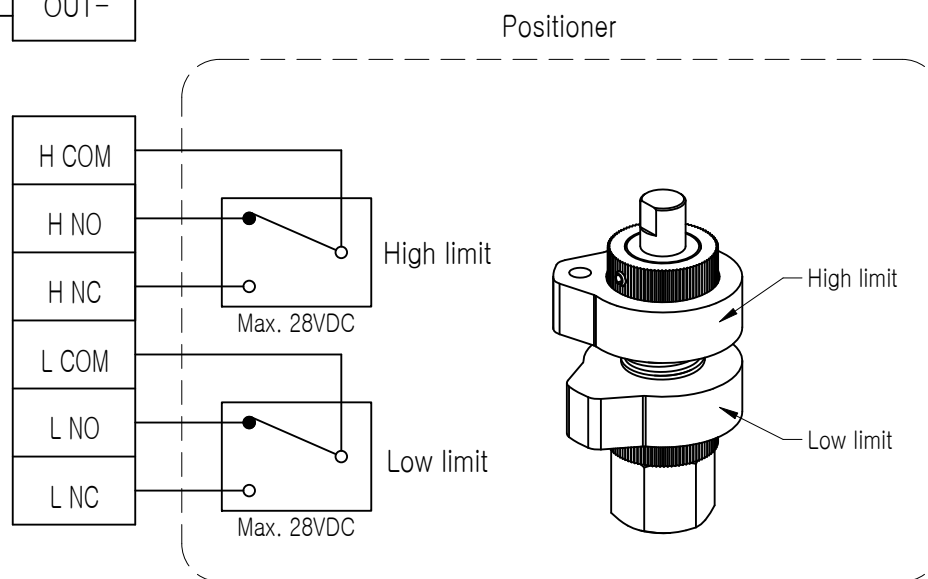
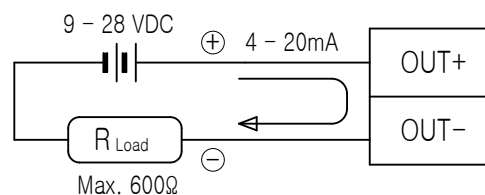


| NO. | DATE   | REVISION    | DESIGNED | CHECKED | APPROVED |
|-----|--------|-------------|----------|---------|----------|
| △0  | 191018 | RELEASED    | DKMIN    | -       | DKMIN    |
| △1  | 220221 | Change From | SHYEOM   | -       | DKMIN    |

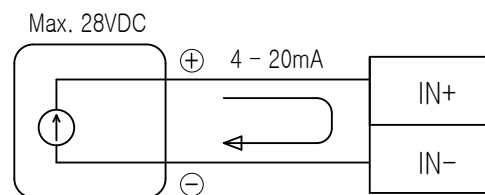

## SPECIFICATIONS (Limit Switch)

|                      |                                 |
|----------------------|---------------------------------|
| Switch type          | 2 x SPDT                        |
| Degree of protection | IEC IP40                        |
| Rating (AC)          | 16A 1/2HP 125/250 VAC           |
| Rating (DC)          | 0.6A @ 125 VDC, 0.3A @ 250 VDC  |
| Durability           | Min. 100,000 @ 30 operation/min |
| Temperature rating   | -25°C ~ 80°C                    |
| Electric shock       | Class I                         |
| Position Indicator   | Open : Yellow, Close : Red      |

|                 |  |            |           |              |                              |
|-----------------|--|------------|-----------|--------------|------------------------------|
| SURFACE TEXTURE |  | WEIGHT     | g         | PROJECT      | -                            |
| FINISH          |  | SHEET No.  | 1 / 1     | PRODUCT NAME | ELECTRO-PNEUMATIC POSITIONER |
| MATERIAL        |  | UNIT       | mm        | MODEL        | TS600                        |
| QUANTITY        |  | SCALE      | 1 / 1     | TITLE        | WIRING DIAGRAM               |
| OTHERWISE NOTE  |  | PROJECTION | 3RD ANGLE | DWG. NO.     | TS600 WD 04 A1               |
| GENERAL DIM     |  | DWG SIZE   | A4        |              | 1                            |