

HREC

Recirculation pump

WATER
TREATMENT


Discharge bore Impeller Applications

Ø150mm ~ Ø1000mm
Propeller type

- For return of internal circulation water from sewage treatment plant
- Dok drain and water supply at the shipyard
- Use of Low-head rain water removal(Gate pump)
- For other low-head & large amount transport

Features

- Easily lifting and installing with the use of a Davis crane
- Inverter type motor enables controlling the return flow amount.
- Optimal moderator design ensures safety of operation. (optional)
- Optimal bearing design enables at least 100,000 hours of operation.
- Dual waterproof effect with the built-in Junction Box.
- Secure with explosion-proof designs that meet U.S. and European standards. (optional)
- Increase corrosion resistance and wear resistance with quality materials.

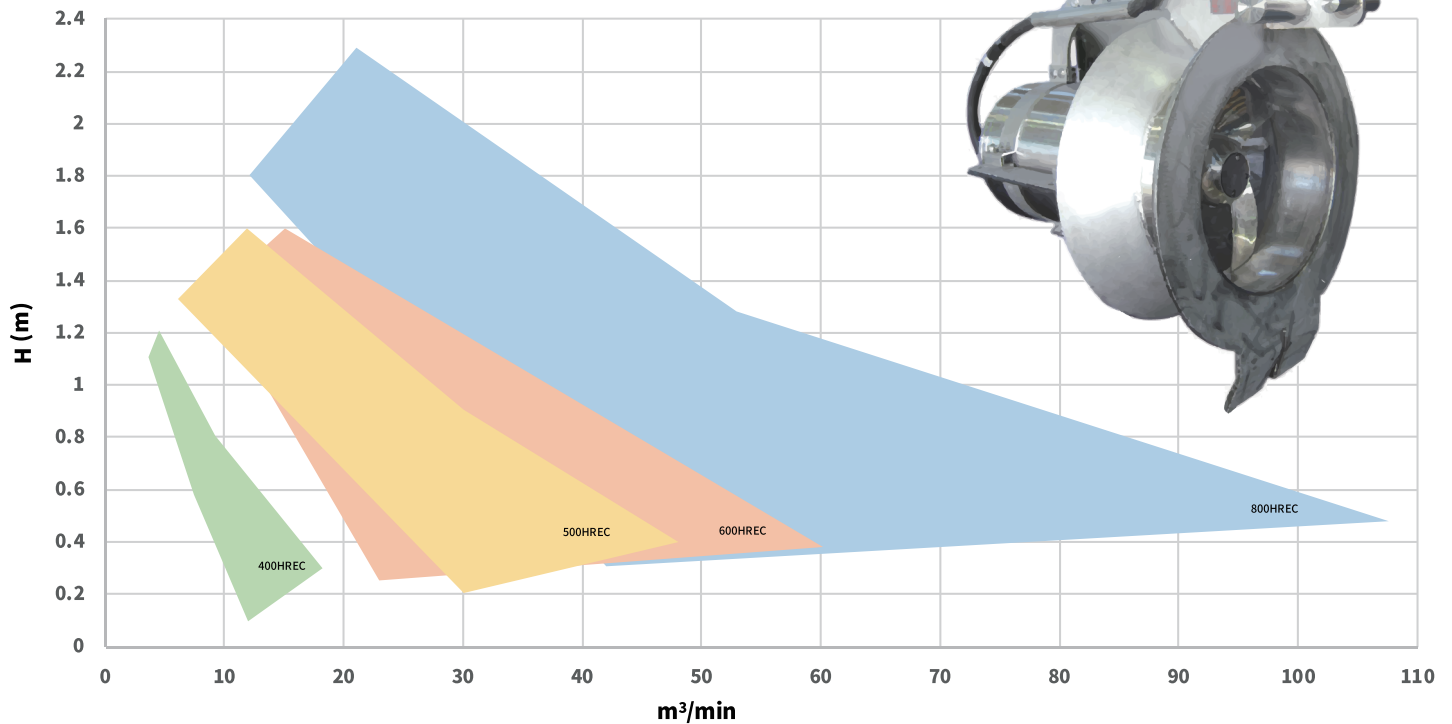

Technical Data

	D	D(Impeller)	HP	RPM
400HREC	Ø400	Ø380	3 / 5	875
500HREC	Ø500	Ø480	7.5 / 10 / 15	585
600HREC	Ø600	Ø580	10 / 15 / 20	585
800HREC	Ø800	Ø780	20 / 29.5 / 40	435