

NOISE FILTER

N Series 3Ø 250V 보급형 General Type



● Features


- Wide Band : High Attenuation
- Band Width : 150KHz~30MHz
- RoHS Compliant
- Inverter Output Type : Model Type"C"
(WYNFT40T2C)

● Specifications


ITEM	MODEL	SYMBOL	WYNFT40T2A WYNFT40T2C	WYNFT50T2A WYNFT50T2C	WYNFT60T2A WYNFT60T2C	WYNFT80T2A WYNFT80T2C	WYNFT100T2A WYNFT100T2C	WYNFT120T2A WYNFT120T2C	WYNFT150T2A WYNFT150T2C	WYNFT200T2A WYNFT200T2C	WYNFT250T2A WYNFT250T2C
Rated Voltage	V		250Vac								
Rated Current	A		40A	50A	60A	80A	100A	120A	150A	200A	250A
Frequency	Hz		50/60								
Dielectric Withstand	V		1500Vac for one 1minute								
Insulation Resistance	MΩ		DC 100MΩ at the 500Vdc								
Leakage Current	mA		≤5mA at the 250Vac								
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-2]								
Operating Humidity	RH		35~85%RH								
Weight	kg		1,2			2,2			2,7		

※ "C" : Inverter Output Type / Derating Curve of page 103

● Circuit Diagram


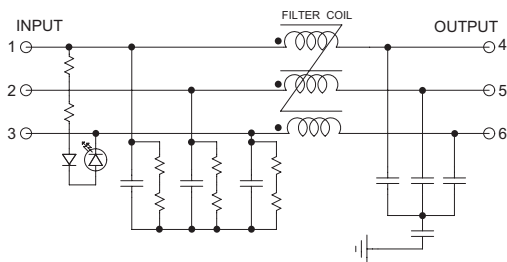


● Terminal




Max 16, Min 6 (40~50A)
Max 23, Min 8 (60~100A)
Max 28, Min 8 (120~250A)

● Characteristics

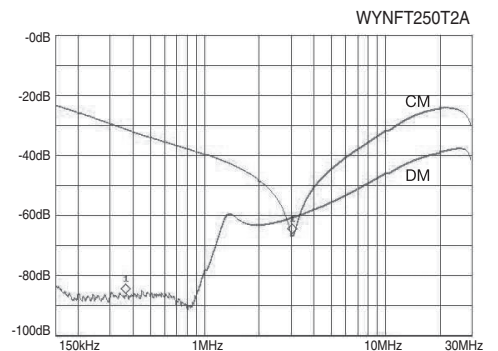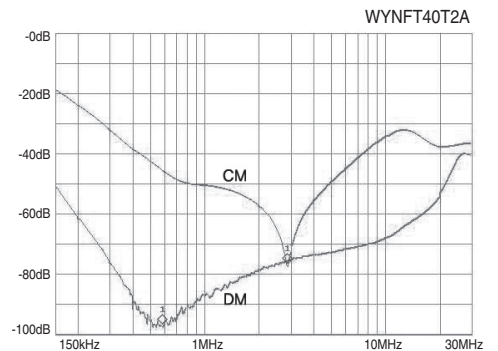

● Dimension

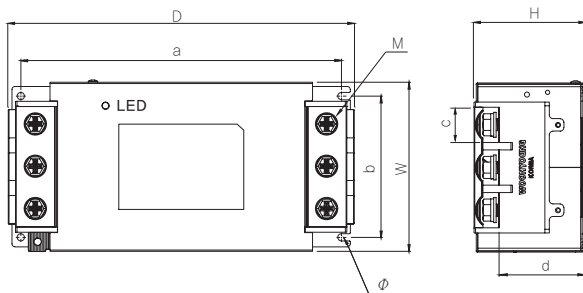

MODEL	W	H	D	a	b	c	d	M	Ø
WYNFT40~50T2A	91	57.2	184	173.5	74	17	42.3	6	5
WYNFT60~100T2A	115	75	235.2	218	96	24	58	8	5
WYNFT120~250T2A	157.2	100.1	347.5	316	130	28.5	68.6	8	6.5

DIN Rai

NSP TYPE

SP TYPE

2CH TYPE

3CH TYPE

BATTERY CH

MULTIST

3P4W

HIGH QUAL

GENERAL