

INSERTION FITTINGS

series
EKC

Protection	Gas	Zone	1-2	II2G	Ex d IIB
	Dusts		n.a.	n.a.	n.a.


Degree of Protection	IP66
----------------------	------

Amb. Temp.	Standard	-20°C	+40°C
	Extended	-20°C	+60°C

Entries Threading	EN 10226 (Gk)
-------------------	---------------


Material	Aluminum light alloy
----------	----------------------

Standards and Certificates	Directive 2014/34/EU (ATEX)
	EN 60079-0 • EN 60079-1
	U CESI 03 ATEX 141U

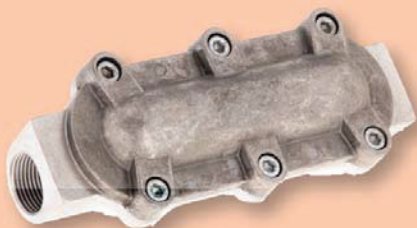

- Recommended to facilitate the insertion and laying of the conductors along long stretches of conduits.
- Galvanized steel screws.

Options - Threading NPT ANSI B1.20.1 (N)

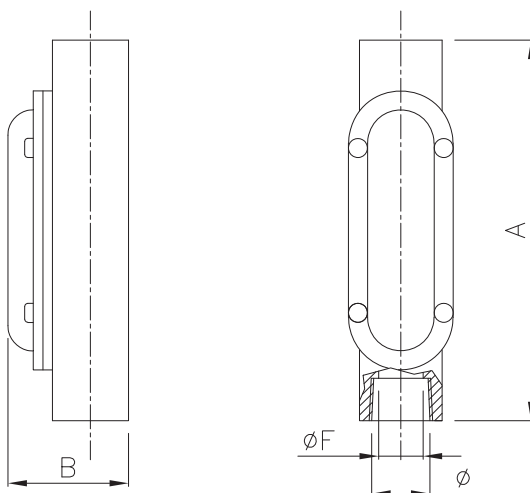

Code	Dimensions (mm)					Weight (g)
	Ø	A	B	C	ØF	
EKC 2	3/4"	173	60	70	19	480
EKC 3	1"	183	67	70	25	557
EKC 5	1.1/2"	243	90	102	38	1145
EKC 6	2"	300	112	104	48	1750
EKC 7	2.1/2"	380	174	138	62	3600
EKC 8	3"	380	174	138	70	3620

Example: LBH3

Example: LBHS3

Example: EKC5N

Order Coding

Type
LBH = Inspectable bend
LBHS = Inspectable bend
EKC = Insertion fitting

Dimension
1/2/3/4/5/6/7/8

Threading
.. = EN 10226 (Gk)
N = NPT ANSI B1.20