



6004N-DWG-600R-1S

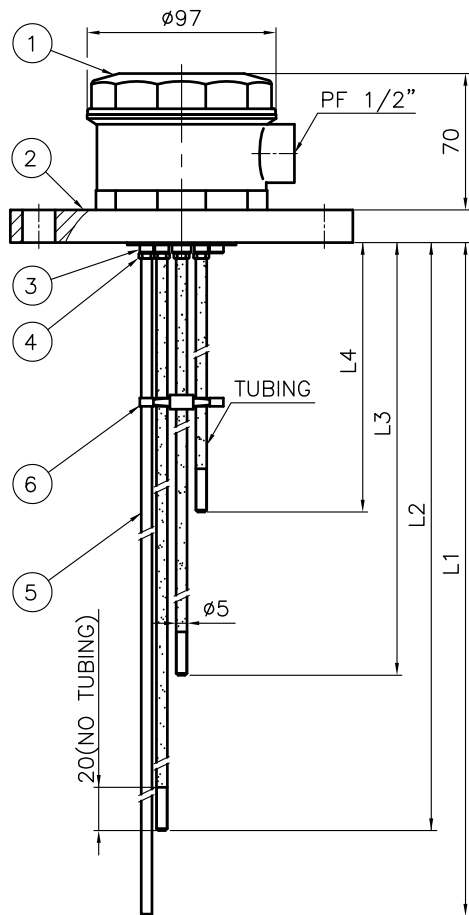

WIRING DIAGRAM

DC10 to 36V

DESIGN DATA

CODE	N/A					
UNIT	mm					
KIND OF FLUID			—			
PRESS.	DESIGN	Max. 2		Kg/Cm ²		
	OPERATING	—		Kg/Cm ²		
TEMP. (SENSOR)	DESIGN	-10 ~ 80		°C		
	OPERATING	—		°C		
TEMP. (ELECTRONICS)	DESIGN	-10 ~ 80		°C		
	OPERATING	—		°C		
ENCLOSURE	WEATHER PROOF					
MOUNTING TYPE&SIZE	JIS 10K 80A FF					
ELECTRODE MATERIAL	<input type="checkbox"/> 304SS		<input type="checkbox"/> 316SS			
ELECTRODE TUBING MATERIAL	<input type="checkbox"/> PE		<input type="checkbox"/> PTFE			
TAG NO.	L1	L2	L3	—	—	

NOTES

REVISION

6	KEEPER	PVC	1		
5	ELECTRODE	304SS	4		
4	LOCK NUT	304SS	4		
3	ELECTRODE HOLDER	MBsBE2	5		
2	FLANGE	HDPE	1		
1	TERMINAL BOX	ABS	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	-				
PROJECT	-				
TITLE	ELECTRODE TYPE LEVEL SWITCH SH-4-B-2-A-1-A-1 ASSEMBLY DRAWING				
MANUFACTURER	SeoJin Instech Co., Ltd.				
SCALE		ERP CODE	-	Work Order No.	-
DWG NO.	SJ-M009-DWG-AP009				

△					
△					
△					
△					
△	FOR APPROVAL				
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED