

IRZ-XE108-04

2MP Network IR Bullet Camera




Features

- 1/3" Panasonic CMOS Sensor
- x10 Optical Zoom(5.1 ~ 51mm) & x32 Digital Zoom
- D WDR (Digital Wide Dynamic Range)
- 3D DNR (Digital Noise Reduction)
- 4pcs IR LED(IR Distance 50m)
- External Control : Reset/Factory Default
- Built-in Concealed Cable Bracket
- IP66 Waterproof
- Triple Stream
- H.264, MJPEG
- Support ONVIF
- POE

Dimensions

Unit : mm

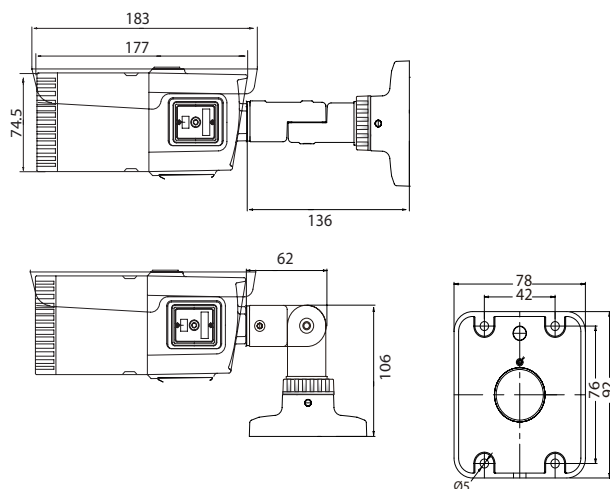

MODEL		IRZ-XE108-04		
CAMERA				
Image Sensor		1/3" Panasonic CMOS Sensor		
Total Pixels		1956(H) x 1266(V) = 2.48 Mega Pixels		
Active Pixels		1944(H) x 1092(V) = 2.12 Mega Pixels		
Min. Illumination	Color	0.5 lux / DSS 0.002 lux		
	BW	0.1lux / DSS 0.001 lux		
	IR-LED	0 lux		
S/N Ratio		more than 50dB (AGC off)		
LENS				
Lens Type		x10 Day & Night Zoom Lens		
Zoom Ratio		Optical x10, Digital x32 Zoom		
Focal Length		f = 5.1mm ~ 51mm		
Aperture Ratio		F1.6 (wide) ~ F1.8 (tele)		
Angle Of View (D, H, V)	WIDE	68°	54°	31°
	TELE	6.7°	4.9°	4.0°
CAMERA FUNCTIONS				
Focus		Mode / Distance / Zoom Speed / Lens Refresh / E.Zoom / Zoom Preset		
Exposure		Mode/ AGC / Shutter Speed / Iris / DSS / Flickerless /		
		Brightness / WDR,BLC / Day&Night		
Shutter Speed		1/30(25) ~ 1/30,000 sec		
White Balance		Auto / One Push / Manual / Indoor / Outdoor		
Image		HLC / DNR / Mirror / Sharpness / ACE / Defog / Freeze / Gamma		
Intelligence		Privacy / Motion Detection / Digital Image Stabilization		
Special Func		Defect DET / Image Range / System / HD Format / Comm		
Display		Disp Sel / Set Title / Init Sel / Set Init Msg / Language		
NETWORK				
OS		Embedded Linux		
Interface		RJ45 10/100 Base-T PoE		
Protocol		TCP/IP,UDP/IP,RTSP,RTSP,RTCP,NTP,		
		HTTP,DHCP,FTP,SMTP,DNS,DDNS		
Onvif		ver2.4.2		
DDNS		iplinker.net		
Simultaneous Access		Max. 10 user		
Compress Format		H.264/MJPEG		
Resolution		1920x1080/1280×1024/1280×960/1280×720		
		/1024×768/640×480/320×240		
Max. Frame Rate		30fps(@1920x1080)		
Video Quality		H.264 : Bitrate Control		
		MJPEG : Quality Level Control		
Streaming		Triple Stream (Stream1,2,3)		
		RTP/RTSP, UnicastRTP, Multicast RTP		
Audio Input / Output		Mic In, Line out		
Audio compression		G.711 u-law		
Audio communication		Two-way		
Sensor In		1 (NC / NO)		
Alarm Out		1 (Digital Output, Open Collector)		
OS		Windows 7, 8, 10,		
Manager		IE 11, Firefox, Safari, Opera		
Viewer		IE 11(Active-X)		
GENERAL				
Power Source		Regulated 12V DC, PoE(Power over Ethernet)-IEEE802.3af Class 0		
Power Consumption		Max. 750mA		
Operating Temperature		-10°C ~ +50°C / 0% ~ 90% RH		
Dimensions		78(W) x 106(H) x 319(D) mm		
Weight		1.45kg		