


GLOBE VALVE 600#

1/2", 3/4", 1", 1-1/2", 2"

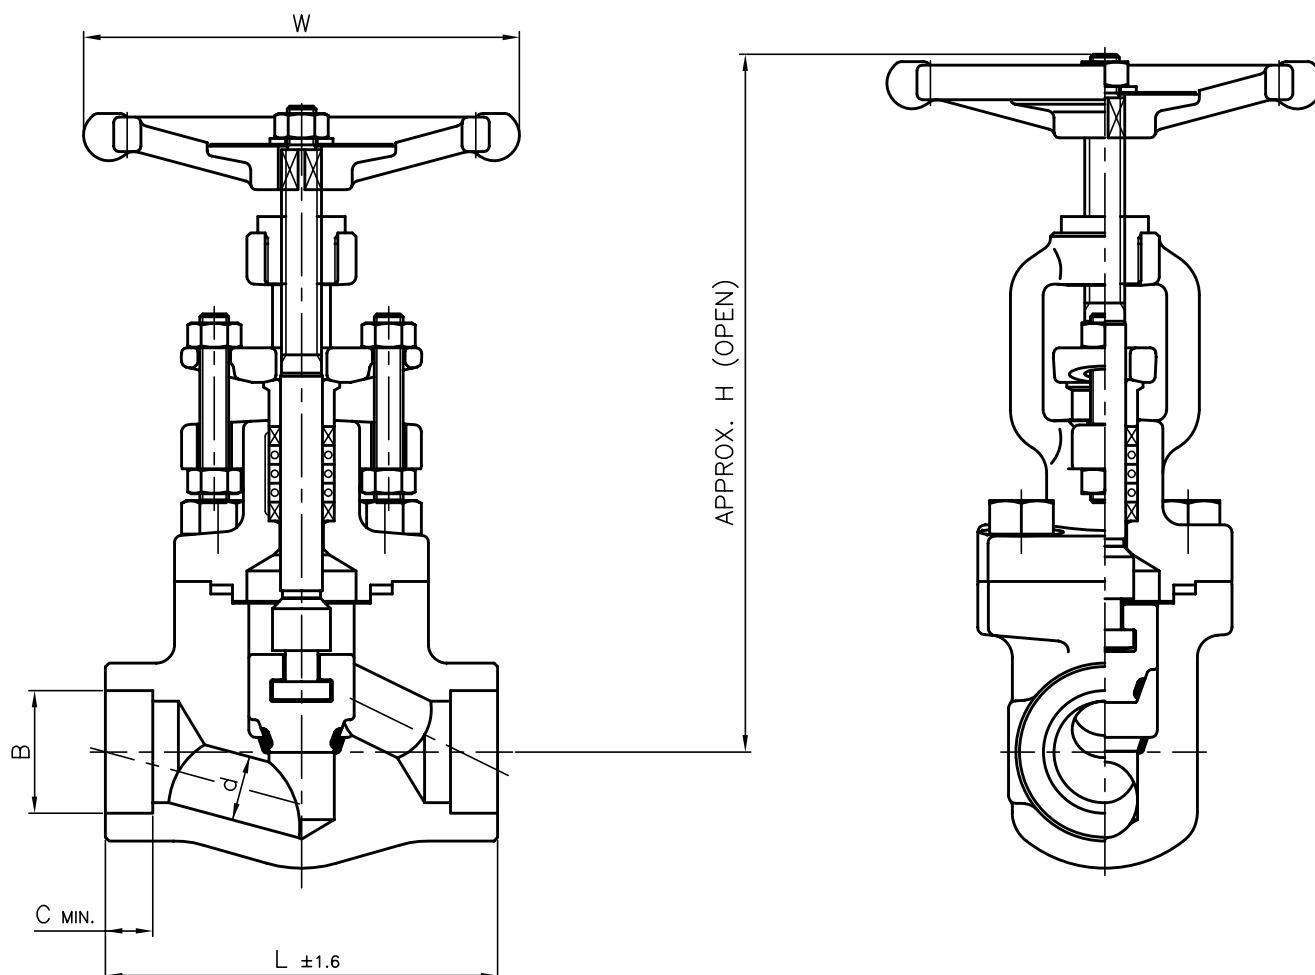


BOLTED BONNET, Outside Screw & Yoke, Socket welding
ASME B16.34 – Pressure Temperature Ratings
ASME B16.11 – Dimension Of Socket Welding Ends

VALVE DESCRIPTION AND DIMENSION								
VALVE SIZE	PRESSURE CLASS	L	H	W	d	B	C	WEIGHT (kg)
1/2 in.	600	80	157	100	10	21.70–22.20	10	1.9
3/4 in.	600	88	157	100	13	27.05–27.55	13	2.0
1 in.	600	108	193	120	18	33.80–34.30	13	3.3
1.1/2 in.	600	152	243	150	29	48.65–49.15	13	6.5
2 in.	600	172	275	180	37	61.10–61.60	16	10.0

GLOBE VALVE 1500#

1/2", 3/4", 1", 1-1/2", 2"

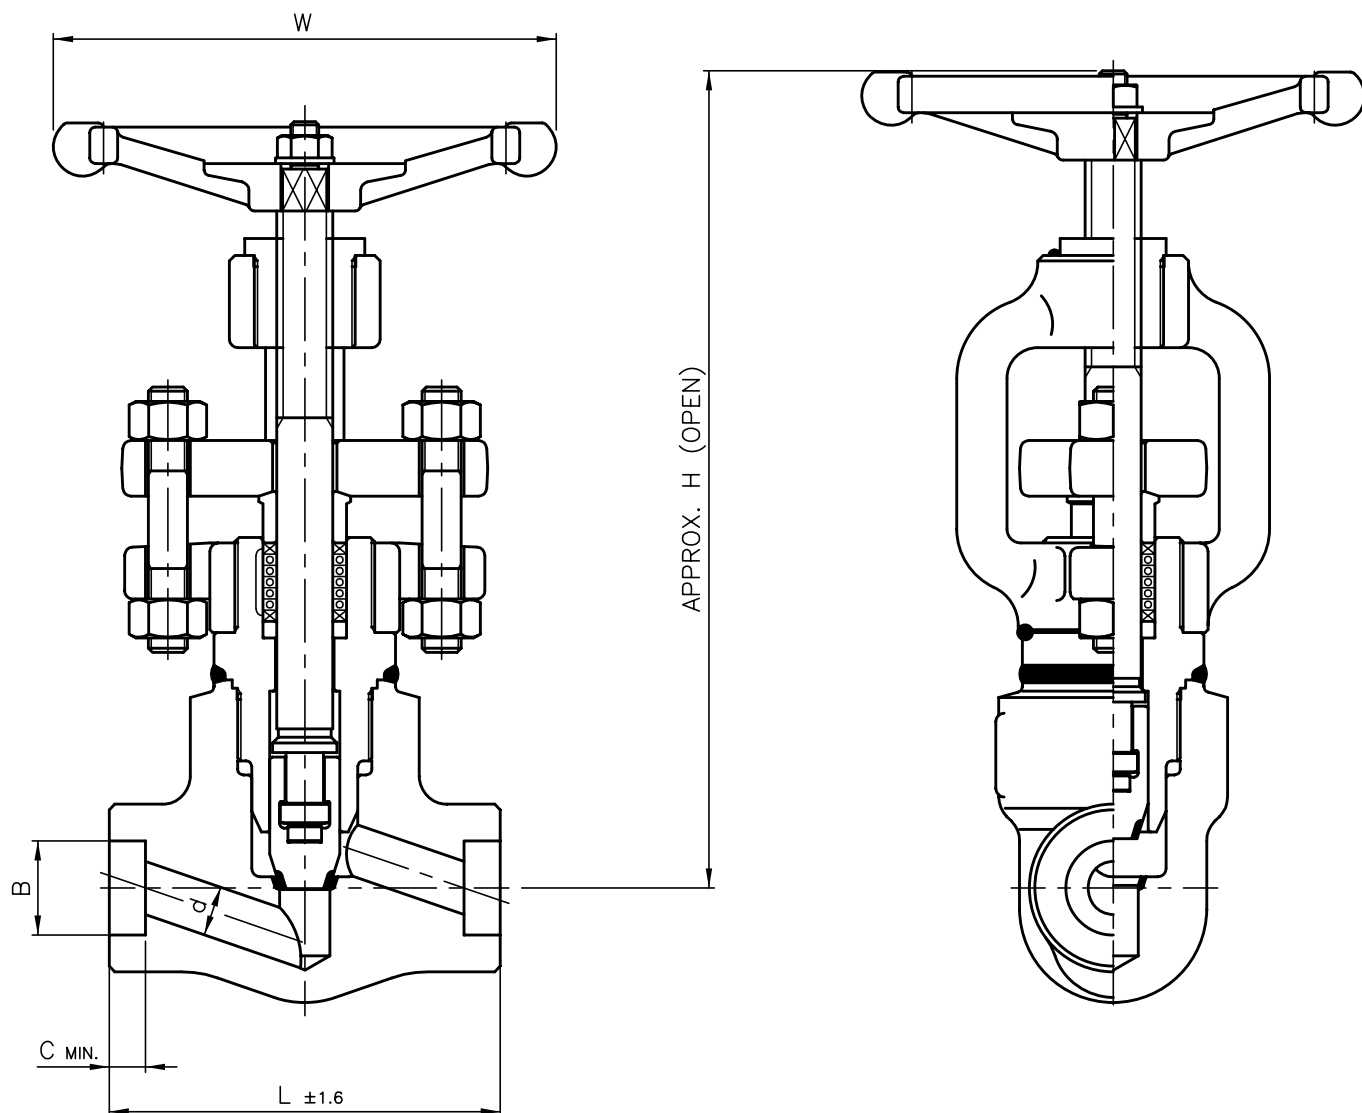


SEAL WELDED BONNET, Outside Screw & Yoke, Socket welding
ASME B16.34 – Pressure Temperature Ratings
ASME B16.11 – Dimension Of Socket Welding Ends

VALVE DESCRIPTION AND DIMENSION								
VALVE SIZE	PRESSURE CLASS	L	H	W	d	B	C	WEIGHT (KG)
1/2 in.	1500	105	222	150	12	21.70–21.95	10	3.1
3/4 in.	1500	120	263	150	15	27.05–27.30	13	3.6
1 in.	1500	140	299	180	20	33.80–34.05	13	6.5
1.1/2 in.	1500	200	425	250	32	48.65–48.90	13	13.0
2 in.	1500	240	475	300	38	61.10–61.35	16	25.0

GLOBE VALVE 2500#

1/2", 3/4", 1", 1-1/2", 2"

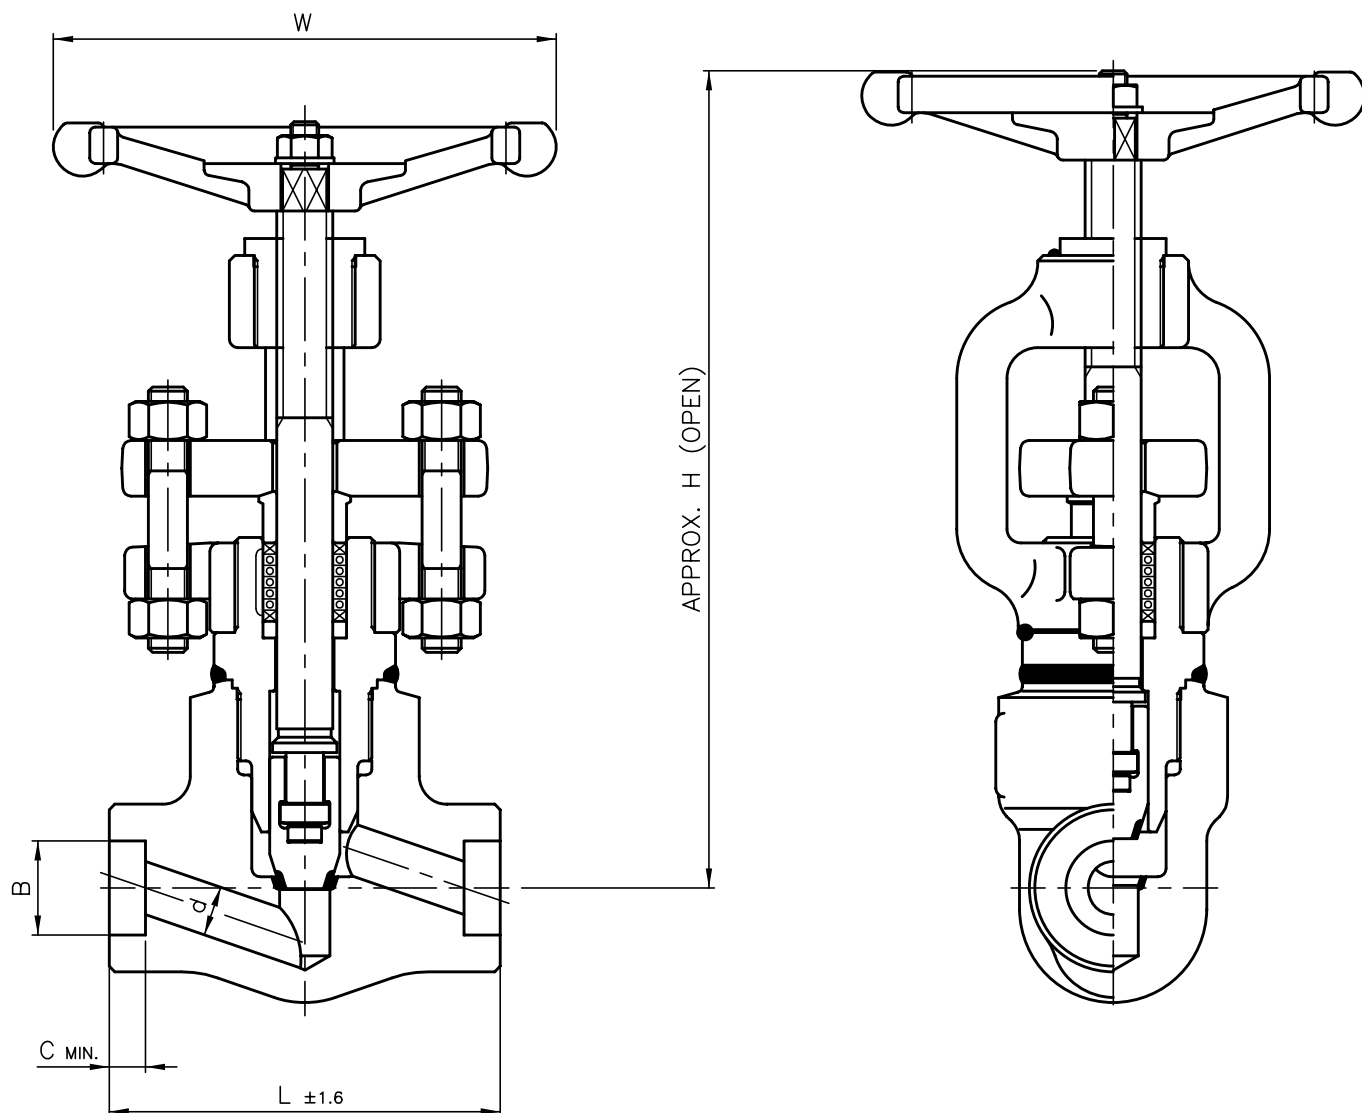


SEAL WELDED BONNET, Outside Screw & Yoke, Socket welding
 ASME B16.34 – Pressure Temperature Ratings
 ASME B16.11 – Dimension Of Socket Welding Ends

VALVE DESCRIPTION AND DIMENSION								
VALVE SIZE	PRESSURE CLASS	L	H	W	d	B	C	WEIGHT (kg)
1/2 in.	2500	105	232	150	10	21.70–22.20	10	3.5
3/4 in.	2500	120	263	180	13	27.05–27.55	13	4.5
1 in.	2500	140	299	200	18	33.80–34.30	13	10.0
1.1/2 in.	2500	200	425	315	28	48.65–49.15	13	22.0
2 in.	2500	240	475	350	35	61.10–61.60	16	34.0

GLOBE VALVE 4500#

1/2", 3/4", 1", 1-1/2", 2"

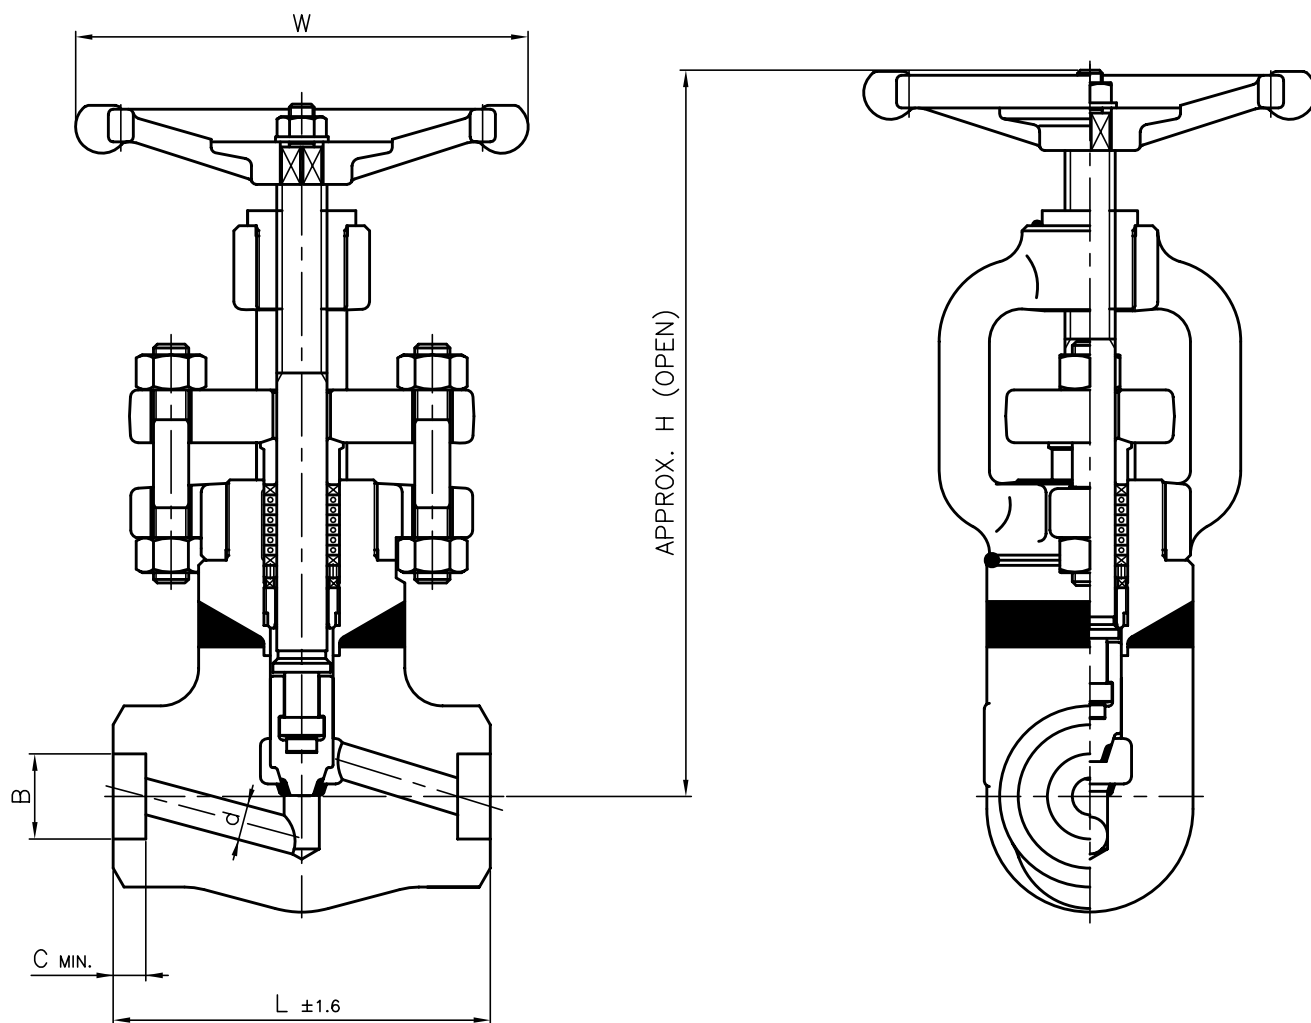

SEAL WELDED BONNET, Outside Screw & Yoke, Socket welding
 ASME B16.34 – Pressure Temperature Ratings
 ASME B16.11 – Dimension Of Socket Welding Ends

VALVE DESCRIPTION AND DIMENSION								
VALVE SIZE	PRESSURE CLASS	L	H	W	d	B	C	WEIGHT (kg)
1/2 in.	4500	150	300	200	9	21.70–22.20	10	16.0
3/4 in.	4500	150	300	200	11	27.05–27.55	13	16.0
1 in.	4500	150	300	200	14	33.80–34.30	13	16.0
1.1/2 in.	4500	220	428	315	22	48.65–49.15	13	45.0
2 in.	4500	220	428	315	26	61.10–61.60	16	45.0