



Flowmeter Product Directory

MODEL : ASFA



ASFA-1-3-P-1

FEATURES

·본 제품은 순간유량 측정용(ASF)에 접점(Alarm Contact) 기능을 추가한 제품으로 접점신호는 1점점과 2 점점으로 구분 한다.

SPECIFICATION

CON'N	SIZE	MAT'L	PRESS.	TEMP.	ACCURACY
SCREW	8A-25A	SUS 304/316	MAX. 10kgf/cm ²	MAX. 80°C	FS ±3.0%

ALARM CONTACT

CAPACITY	AC220V 0.5A / DC24V 0.05A
CONTACT OUTPUT	HIGH OR LOW SET ALARM
CONTACT TYPE	SENSOR SELF HOLDING FORM
CONTACT RATE	SPST RELAY OUTPUT
CABLE CODE	0.4m (10m AVAILABLE)
AMBIENT TEMP	-10 ~80°C

MODEL CODE


ASFA	-	<input type="checkbox"/>	-	<input type="checkbox"/>	-	<input type="checkbox"/>	-	<input type="checkbox"/>	DESCRIPTION
FLOW DIRECTION		1							BOTTOM - TOP
		5							SIDE - SIDE
MATERIAL			2						SUS304
			3						SUS316
			0						OTHER
CONNECTION						P			PT(Male / Female)
						N			NPT(Male / Female)
						0			OTHER
CONTACT								1	ONE POINT ALARM
								2	TWO POINT ALARM



Flowmeter Product Directory

MODEL : ASFA

FLOW RATE					
DIVIDE	ALLOW RANGE		LIMIT	LENGTH (mm)	
	LIQUID (L/min)	GAS (NL/min)		M	L
FLOAT SIZE(d)	SUS304		(kgf/cm ²)	M	L
10A	0.5 - 5	5 - 50	10	55	150
	1 - 10	10 - 100			
15A	1.5 - 15	15 - 150	10	55	150
	2 - 20	20 - 200			
	3 - 30	30 - 300			
20A	3 - 30	30 - 300	10	55	150
	4 - 40	40 - 400			
	5 - 50	50 - 500			
	6 - 60	60 - 600			
25A	6 - 60	70 - 700	8	55	150
	7 - 70	80 - 800			
	8 - 80	90 - 900			
		100 - 1000			

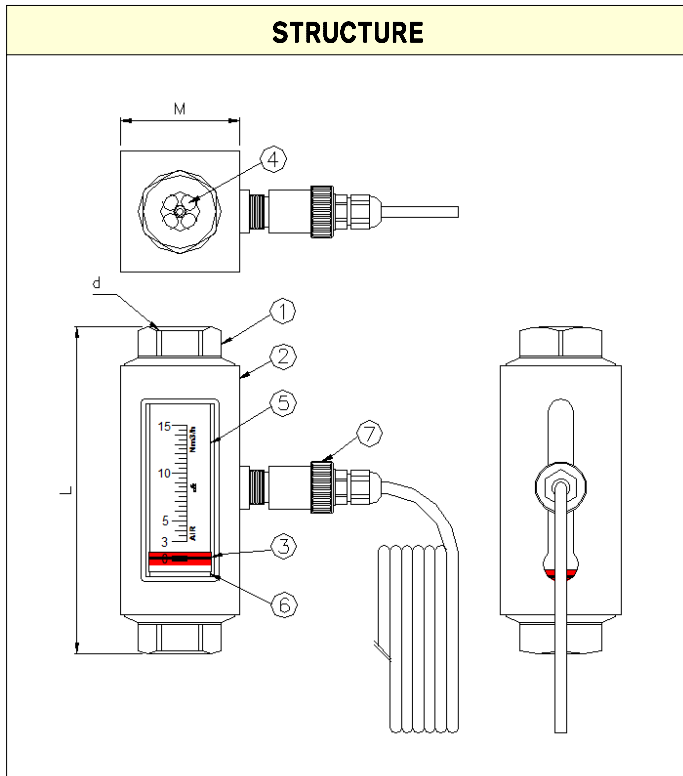

PART LIST

NO	NAME	MATERIAL	
		NO.2	NO.3
1	Body	SUS304	SUS316
2	Case	AL(2)	
3	Index	MAGNET	
4	Support	SUS304	SUS316
5	Sight Scale	ACRYL / GLASS	
6	Stopper	NBR	
7	Sensor	AL + CABLE	