

IRC-150 / IRC-100

WONWOO
www.goodome.com

PTZ Controller




FEATURES

- Small sized and Wireless IR Remote Controller
- RS-485 Control
- Control various Speed Pan/Tilt Camera (Protocol)
- SLOW PTZ Menu Control (Used for PCN-102,SCN-201)


DIMENSIONS

Unit : mm

IRC-150

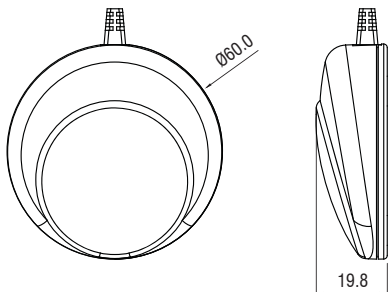

IRC-100

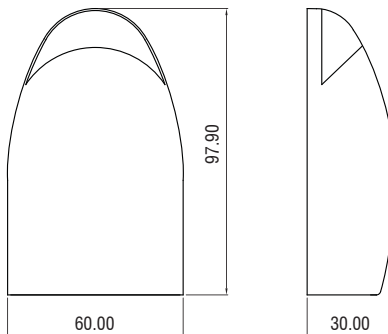

SPECIFICATIONS

MODEL	IRC-150
Keyboard Communication	Interface : RS-485
	Operating distance : 4000ft (1.2Km) on 24 AWG wire
	Protocol : WONWOO, Pelco-P, Pelco-D (Baud rate selectable)
Number of PTZ	Max. 29
Input Voltage	Receiver : DC 12V $\pm$ 1V, 100mA
	Remote controller : DC 3V(AAA Size Battery)
Power Consumption	Max. 300mA
Operating Temperature	0°C ~ 45°C
Humidity	10% ~ 70%
Dimension / Weight	Receiver : 60(ϕ) x 20(H) mm / 40g
	Remote controller : 46(W) x 165(H) x 20(D) mm / 80g

MODEL	IRC-100
Keyboard Communication	Interface : RS-485
	Operating distance : 4000ft (1.2Km) on 24 AWG wire
	Protocol : WONWOO, Pelco-P, Pelco-D, Honeywell (Each model has one protocol)
Number of PTZ	Max. 29
Input Voltage	Receiver : DC 12V $\pm$ 1V, 100mA
	Remote controller : DC 3V(AAA Size Battery)
Power Consumption	Max. 300mA
Operating Temperature	0°C ~ 45°C
Humidity	10% ~ 70%
Dimension / Weight	Receiver : 60(W) x 98(H) x 30(D) mm / 40g
	Remote controller : 46(W) x 165(H) x 20(D) mm / 80g

CABLE CONNECTIONS

Connect RS485 communication line and DC12V power to IR receiver.

