





# Electric tow tractor

## **EZS 010**



Towing capacity: 1000 kg

 **JUNGHEINRICH**

# EZS 010

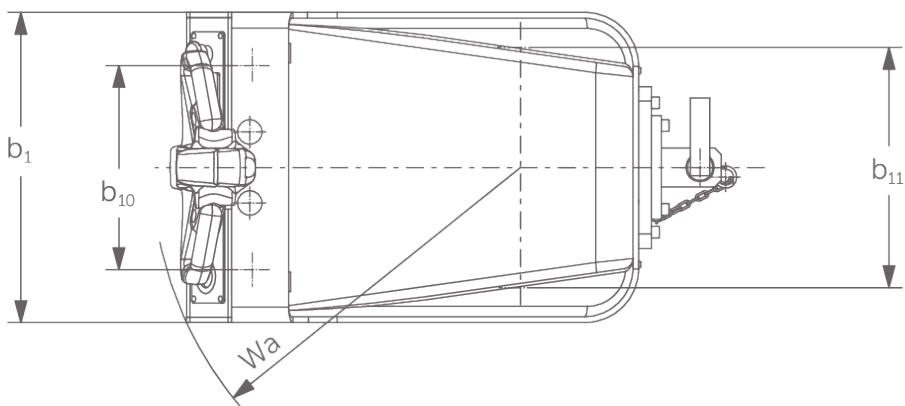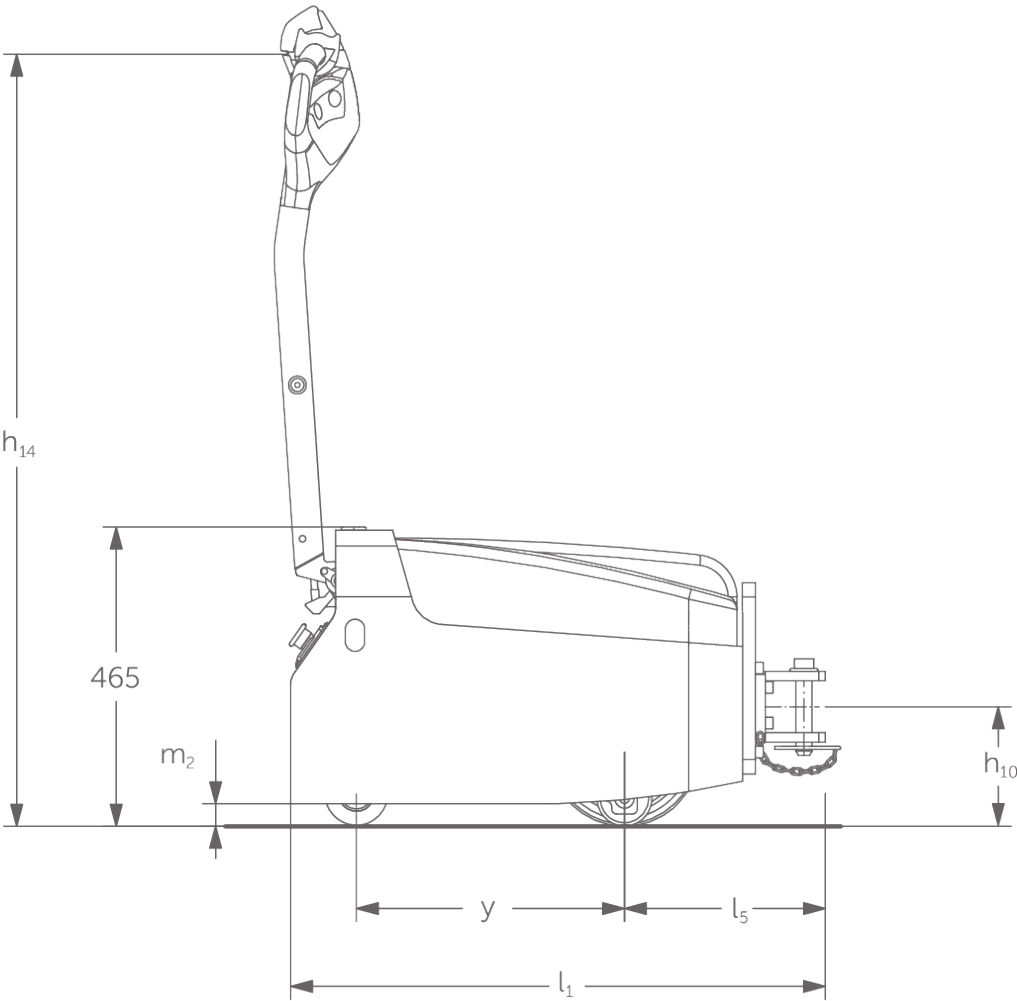

# EZS 010

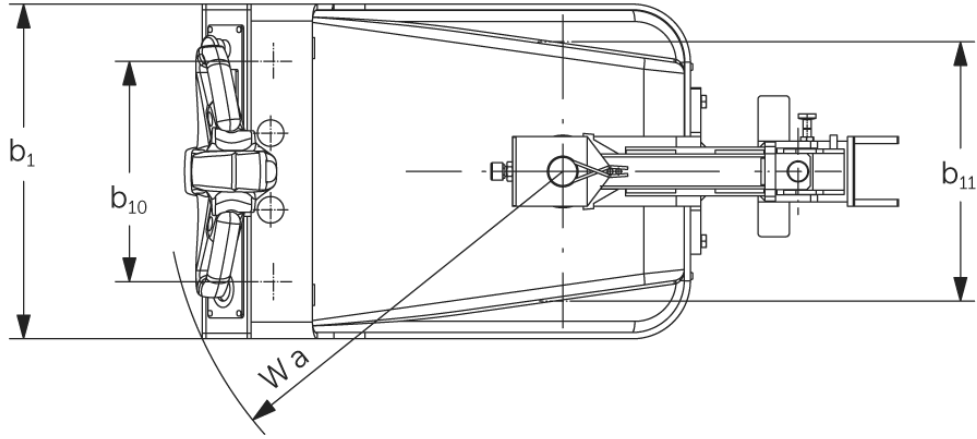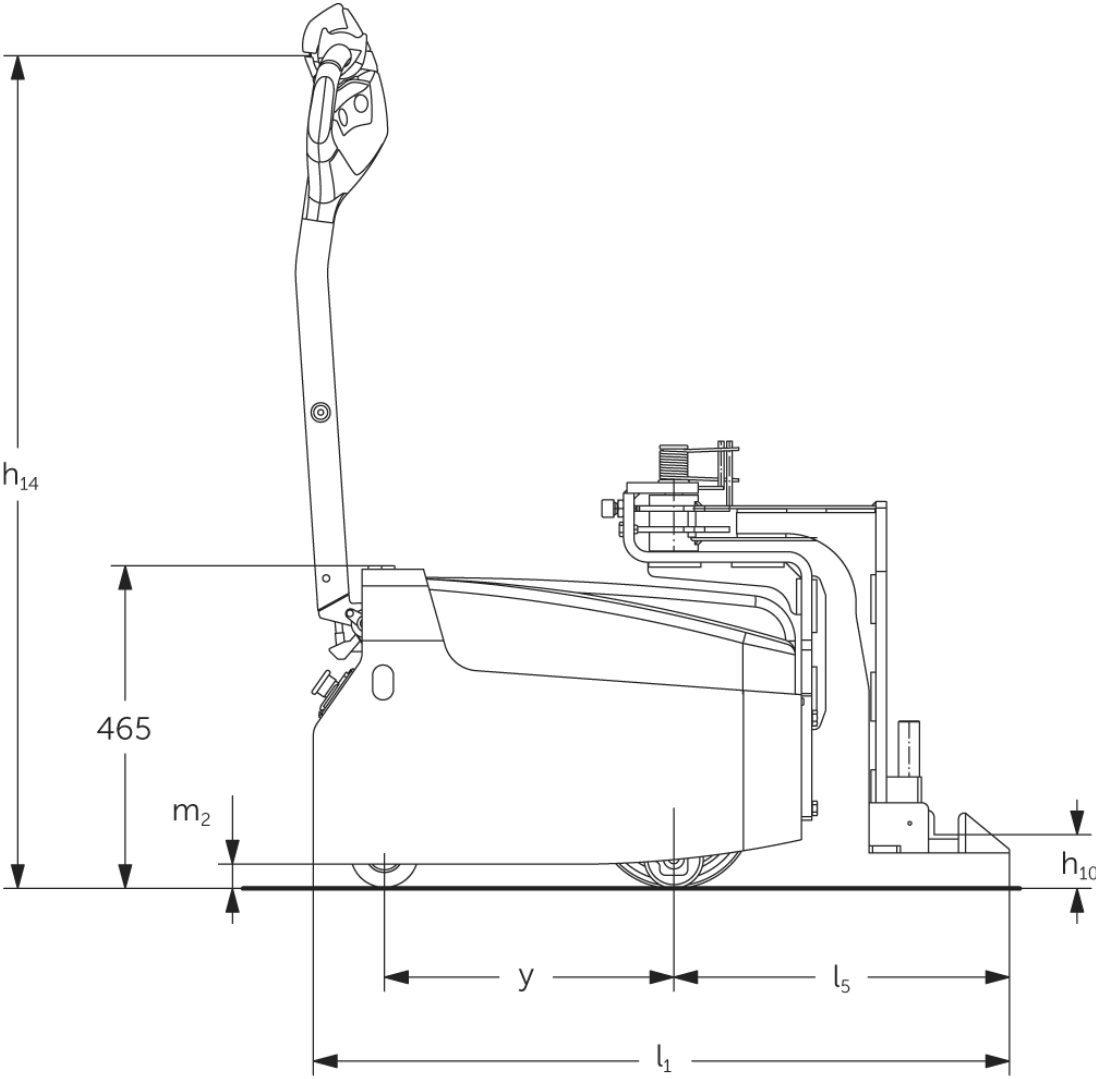

# VDI table

Stand-on: 02/2023

|                          |        |                                                     |                    |                            |
|--------------------------|--------|-----------------------------------------------------|--------------------|----------------------------|
| Characteristic           | 1.1    | Manufacturer (abbreviated description)              |                    | Jungheinrich               |
|                          | 1.2    | Manufacturer's type designation                     |                    | <b>EZS 010</b>             |
|                          | 1.3    | Drive                                               |                    | Electric                   |
|                          | 1.4    | Operation                                           |                    | Pedestrian                 |
|                          | 1.5.3  | Towing capacity                                     | Q kg               | 1000                       |
|                          | 1.7    | Rated drawbar pull                                  | N                  | 200                        |
|                          | 1.9    | Wheelbase                                           | y mm               | 415                        |
| Weights                  | 2.1.1  | Service weight (incl. battery)                      | kg                 | 190                        |
|                          | 2.3    | Axle load unladen front/rear                        | kg                 | 85 / 105                   |
| Wheels/suspension system | 3.1    | Tyres                                               |                    | Polyurethane (PU) / rubber |
|                          | 3.2    | Tyre size, front                                    |                    | Ø 100 x 40                 |
|                          | 3.3    | Tyre size, rear                                     |                    | Ø 230 x 65                 |
|                          | 3.5    | Wheels, number front/back (x=driven)                |                    | 2 / 1x + 2                 |
|                          | 3.6    | Tread width, front                                  | b <sub>10</sub> mm | 315                        |
|                          | 3.7    | Tread width, rear                                   | b <sub>11</sub> mm | 370                        |
| Basic dimensions         | 4.9    | Height of tiller handle in drive position min./max. | mm                 | 835 / 1165                 |
|                          | 4.12   | Coupling height                                     | h <sub>10</sub> mm | 150                        |
|                          | 4.19   | Overall length                                      | l <sub>1</sub> mm  | 700                        |
|                          | 4.21.1 | Overall width                                       | b <sub>1</sub> mm  | 480                        |
|                          | 4.32   | Ground clearance centre of wheelbase                | m <sub>2</sub> mm  | 35                         |
|                          | 4.35   | Turning radius                                      | W <sub>a</sub> mm  | 570                        |
| Performance data         | 5.1    | Travel speed laden/unladen                          | km/h               | 5.4 / 6                    |
|                          | 5.1.1  | Reverse travel speed with/without load              | km/h               | 5.4 / 6                    |
|                          | 5.5    | Drawbar pull laden                                  | N                  | 200                        |
|                          | 5.6    | Max. drawbar pull laden/unladen                     | N                  | 600 / 600                  |
|                          | 5.10   | Service brake                                       |                    | electromagnetic            |
| E-motor/<br>Electronics  | 6.1    | Drive motor, performance S2 60 min                  | kW                 | 1                          |
|                          | 6.4    | Battery voltage/nominal capacity                    | V / Ah             | 24 / 63                    |
|                          | 6.5    | Battery weight                                      | kg                 | 46                         |
| Other                    | 8.1    | Type of drive control                               |                    | 3-phase AC technology      |
|                          | 10.7   | Sound level as per EN12053, operator's ear          | dB (A)             | 63                         |

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in  
Norderstedt, Moosburg and Landsberg  
are certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet  
European safety requirements.



 **JUNGHEINRICH**