


FW7300-GXN

3MP Global Shutter Box



▲
FW7300-GXN
3MP Global Shutter Box

FW7300-GXN is high quality Global Shutter Box type IP camera which is equipped with 1/1.8” 3.19MP Sony IMX265 Global Shutter CMOS image Sensor. As it simultaneously supports H.265, H.264 and MJPEG Video Compression, less network bandwidth and storage space required. It also delivers high quality clear video image at 30 fps @ 3M (2048x1536) in progressive mode.

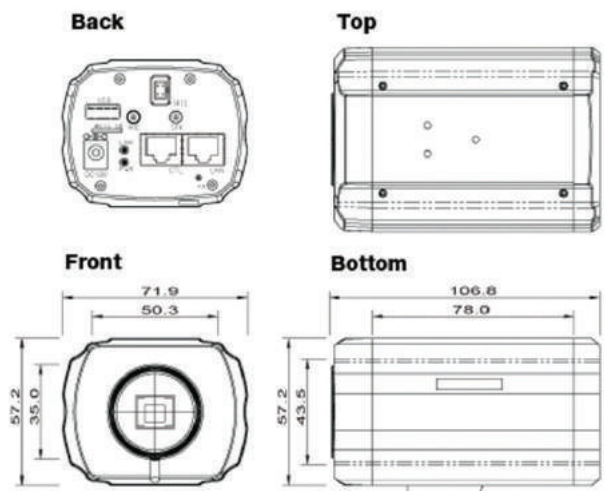

▲
FW7300-GXN
3MP Global Shutter Box

• Key Features

- Ambarella platform - Backdoor Issue free
- Sony IMX265 (1/1.8”) 3.19MP Global Shutter Image Sensor
- Good for ANPR or LPR
- CS Mount Lens
- Quadruple Stream (H.265, H.264, M-JPEG, JPEG)
- Max. 30fps @ 3MP (2048x1536)
- Onboard storage by MicroSD (Up to SDXC 128GB)
- OnVIF (Profile S) standard

• Tech Notes

Global shutter cameras for LPR

High-speed, smear-free still image capture is the hallmark of global shutter image sensors. Applications such as traffic management, metrology and robotics inspection all need to image fast-moving objects without smear or distortion. These imagers have the ability to electronically shutter itself and “stop the action.”

Latency

Latency is request and response time between IP cameras and remotely connected client devices or servers. FlexWATCH IP camera shows the lowest Latency time (25%~40% better) against popular other IP cameras from various brands.

FW7300-GXN

► Technical Specifications

Camera

Imaging Sensor	1/1.8” 3.19MP Sony IMX265 Global Shutter CMOS
Lens	CS Mount Type
Day & Night	True Day & Night (ICR)
Min. Illumination	Color : 0.05 lux (0.02 lux DSS On) B/W : 0 lux

Video Stream

System	Ambarella 32bit Embedded Linux 256Mbyte SDRAM, 128Mbyte NAND Flash
Compression	H.265, H.264, M-JPEG, JPEG
Resolution	2048x1536, 1920x1080, 1280x720, 704x480, 640x352, 320x176, 160x96
Frame rate	30fps/25fps @ Full-HD
Video Stream	Quadruple Streaming, selectable : H.265/H.264/MJPEG, Frame rate, Bitrate, VBR/AVBR/CBR/ACBR, GOP

Video Setting

Motion Detection	4 Areas
Audio Detection	Enable (sensitivity setting) / Disable
Privacy Masking	8 Areas
Video Analytics	Optional (Face Detection, Tampering, Tripwire etc.)
Smart Video	ROI
Exposure Mode	Indoor / Outdoor
AE Metering Mode	Spot / Center / Average / Venter Flip
Shutter Control	Manual (Min./Max, Setting) / Auto
Max AGC Gain	0~72
Sense Up Level	Off / 1 / 2
Back Light Compensation	Enable / Disable
Auto Exposure Weight	25% ~ 400%
WDR	DOL WDR (Enable / Disable), D-WDR 0~128
Image Adjustment	Brightness / Contrast / Hue / Saturation / Sharpness
White Balance	Auto / Manual / 9 Special Condition / Custom
3DNR	0~11
Day & Night Control	Color / Black&White / AutoNight Color (B/W, 10, 20, 30, 40, 50)
Image Direction	Vertical Flip / Horizontal Flip / Corridor Mode

Illuminator

Type	-
Distance	-

Network

Security	IP Filtering, HTTPS, Encrypted & Basic Authentication, Management White List
Supported protocols	HTTP, RTP/RTSP(Uni/Multicast), TCP/IP(v4/v6), UDP, FTP, Telnet, HTTPS, RARP, SNMP, DHCP, NTP, SMTP client, uPnP&etc
DDNS	www.ipcctvdns.com
Interface	RJ45 Ethernet 10/100Mbps

System Intergration

Programing Interface	SDK, OnVIF Profile S
Video Analytic	Motion detection. Optional: ROI, Tripwire, Tampering, Face Detection
Triggering Event	Motion detection, triggering DI, triggering serial input, connected/ disconnected, boot finished
Action on Event	Pre-alarm & Post-alarm buffer. Upload FTP, Email notification, FCM Google notification
Connection	1 DI/ 1DO, RS485

Onboard storage

Type	1 MicroSD Slot
Recording	Always, Schedule, Event, Schedule & Event
Playback	Internet Explorer, FlexWATCH NVR/ CMS/ Mobile App

Audio

Compression	8bit G.711, 8Khz, 8KByte/sec
Audio stream	2 way
Connection	1 Audio In / 1 Audio Out

General

Case	Metal
Power Supply	SMPS, DC12V / 1A PoE : IEEE 802.3af
Power Consumption	Max. 3.5W
Operating Environment	-20℃ ~ +60℃, 10% ~ 90% RH
Dimension	71.7(W) x 103.5(D) x 57.4(H) mm
Weight	About 375g without Power Supply
Approval	KC, CE, FCC, RoHS, IK10, IP66
Accessories	-
Bundle Software	IP Installer, SMVP, Smart NVR Lite