

BK-M18-24

2MP HD-SDI Mini Bullet Camera

HD-SDI
EX-SDI




Features

- 1/3" 2MP Panasonic CMOS sensor
- 1080p@30/25fps, 720p@60/50fps, 720p@30/25fps
- HD-SDI, EX-SDI
- 3MP 3.6mm Fixed Lens
- Real-time True WDR
- Digital Noise Reduction(2D+3D)
- Digital Slow Shutter
- Digital Image Stabilizer
- Privacy Mask Function
- High Light Compensation
- Defog Function
- ACE(Digital WDR)
- Motion Detection
- IP66/IK10 for outdoor application
- Dual Power(DC12V, AC 24V)
- Built-in OSD Control joystick
- 24pcs IR LED(IR Distance 20m)

Dimensions

Unit : mm

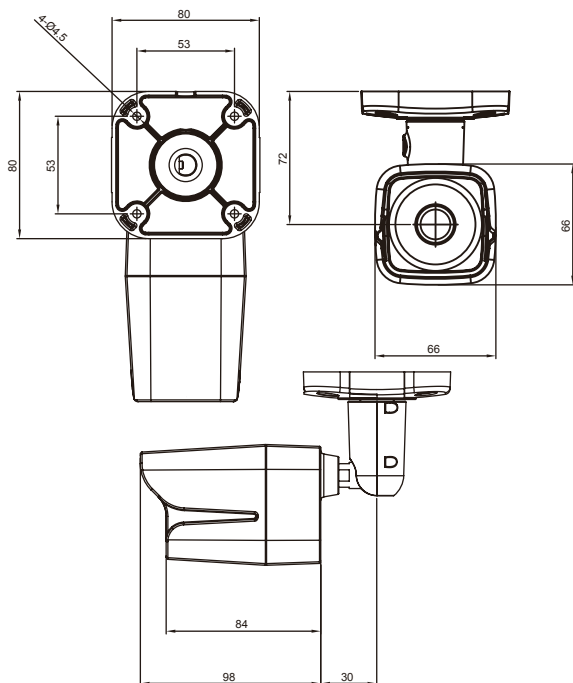

CAMERA	
Image Sensor	1/3" Panasonic CMOS Sensor
Total Pixels	1956 (H) x 1266 (V) = 2.48M Pixels
Active Pixels	1944 (H) x 1092 (V) = 2.12M Pixels
Video Format	1080p@30/25fps, 720p@60/50fps, 720p@30/25fps
Min. Illumination	Color : 0.5 lux , BW : 0.1lux / 0lux(with IR LEDs)
	Color DSS : 0.002 lux , BW DSS : 0.001 lux / 0lux(with IR LEDs)
S/N Ratio	more than 50dB (AGC off)
Video Output	HD-SDI, EX-SDI
LENS	
Lens Type	3.6mm Fixed Lens
CAMERA FUNCTIONS	
Camera Title	ID / Title / Zoom Ratio / System Message
Day & Night	Auto / Day / Night / Ext-In
WDR/BLC	Off / WDR / BLC / HLC
ACE	Off / Low / Middle / High
DNR	Auto / Off / Low / Middle / High
Defog	Off / On(Auto / Manual)
Digital Image Stabilizer	Off / On
Motion Detection	Off / On (3 positions)
Privacy Mask	Off / On (24 positions)
Digital Slow Shutter	Off /x2 /x4
Gain Control	Off / On
White Balance	Auto / One Push / Manual / Indoor / Outdoor
Shutter Speed	1/30(25) ~ 1/30,000 sec
E.Zoom	Off / x2 ~ x32
Digital Flip	Off / H / V / H&V
GENERAL	
Power Source	DC12V±10% / AC24V±10%
Power Consumption	DC 12V 170mA(IR ON : 400mA)
Operating Temperature	-10°C ~ +50°C / 0% ~ 90% RH
Dimensions	66(W) x 66(H) x 184(D)
Weight	0.34Kg