


SINCE 1991



Automatic Cutting Machine Series KM-3400



● Digital Control Panel

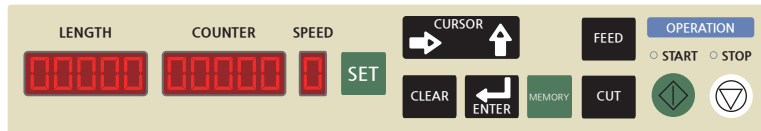

- Digital Window for easy set-up
- Push button set-up for all machine functions
- Count of pieces needed
- Five-memory storage
- Various warning messages and alarm functions


● Various sensors

- Material run-out sensor
- Default Value sensor for blade height
- Proximity sensor
- Power sensor to save working data in case of power failure




● Feeding Part

- Material Hanger and Guide
- Aux. Roller and Feeding roller
- A knob for roller lift-up
- Roller friction adjusting nut
- Material pressing plate and adjusting nut




● Cutting Part


- Upper/Lower/Wing blades
- Carbonated Blade life two times the life of competitor model
- Operate friendly design for easy replacement




● Options




C O P - 3 1 2
M a t e r i a l
P r e - f e e d e r
• more than 100mm wide



C O P - 3 1 4
S t a t i c R e m o v e r
• Removes static remaining between blades and material



C O P - 3 1 3
T u b e S p r e a d i n g U n i t
• Increases productivity by spreading the compressed vinyl tube to be cut.

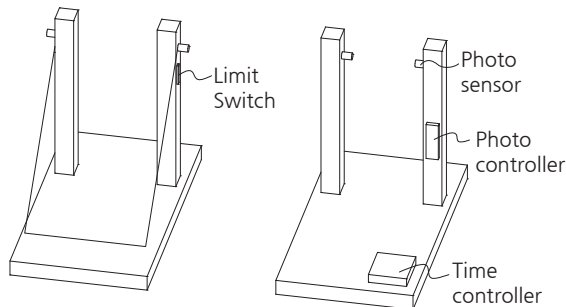

C O P - 3 1 5 / 3 1 6
L i m i t s w i t c h / P h o t o s e n s o r
• Cuts costs by connecting to the extruder machine and output materials

Precise,
Convenient,
Accurate!

● Specifications

Dimension(mm)	410 X 600 X 345 (W x D x H)
Weight (KG)	43
Cutting Material	Shrink tube, Hose, Rubber, Tin/Copper plate, Wire, Braided wire, Paper, Silicon tube, Film, vinyl, etc.
Max. cutting width	400mm
Power supply	110/220 VAC, 50/60Hz, Single Phase
Power consumption	18 W ~ 250 W

* Specifications are subject to change without notice.

Cutting

940 Gosaek-dong, Gwonseon-gu,
Suwon-si, Kyeonggi-do, 441-813, Korea
Tel. 031-8012-9900 / Fax. 031-8012-9999

KM digitech

www.youtube.com/user/kmdigitech