

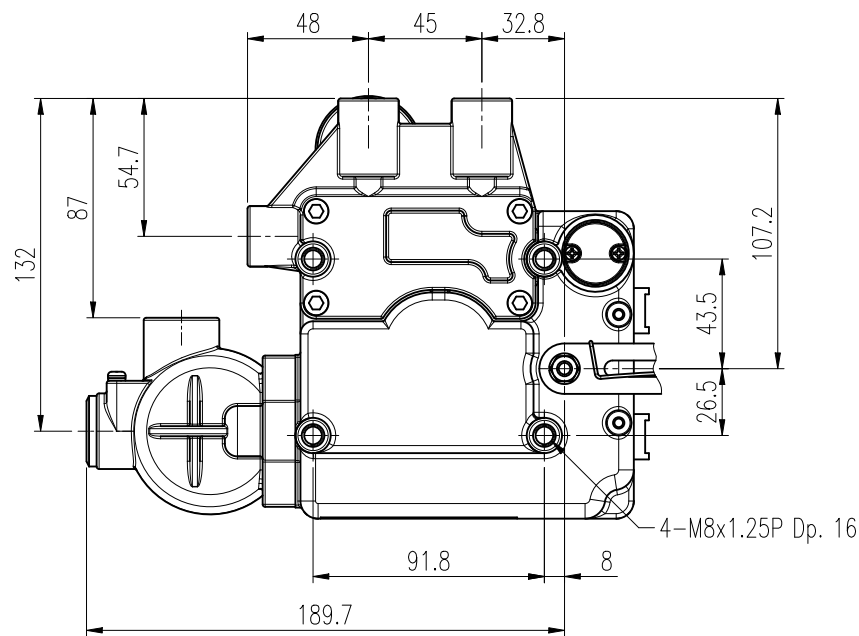
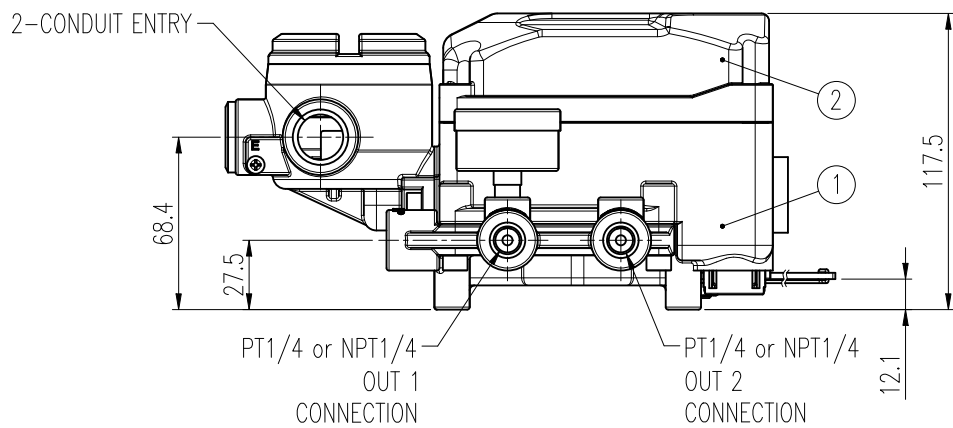
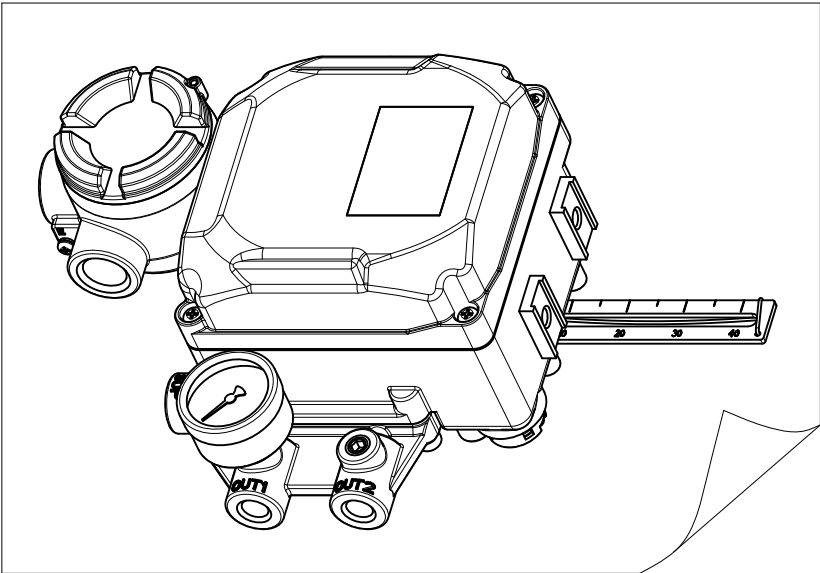


NO.	DATE	REVISION	DESIGNED	CHECKED	APPROVED
△0	150918	RELEASED	SHAN	-	SHAN
△1	181029	ADD TEMPERATURE GRADE	DKMIN	-	DKMIN
△2	220221	ADAPT TO REALITY	SHYEOM	-	DKMIN

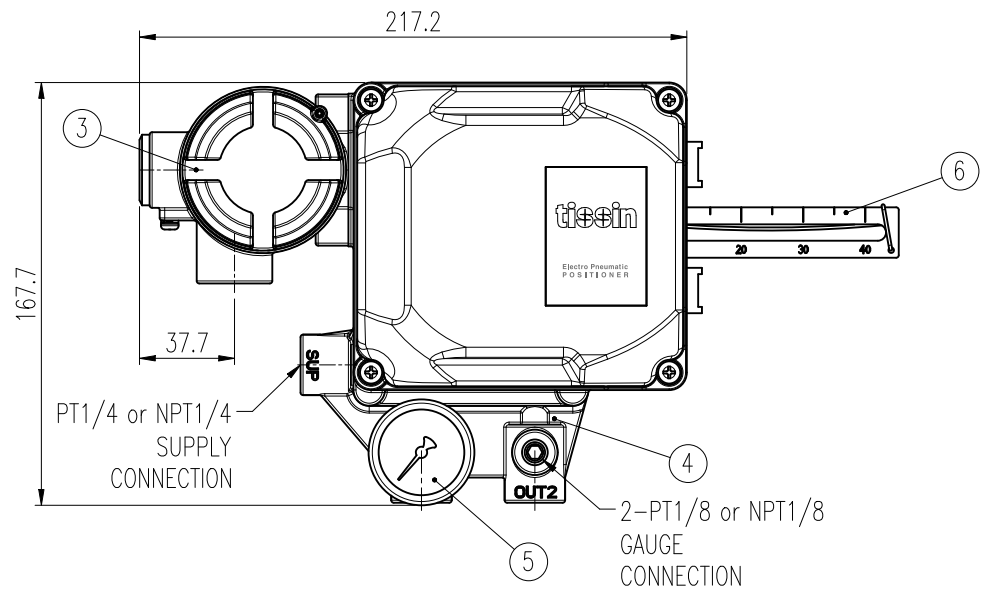

FEEDBACK LEVER

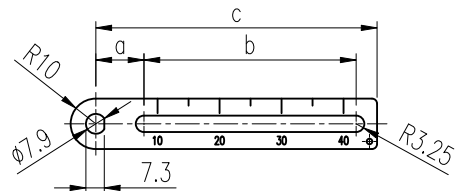

LEVER TYPE	STROKE	a	b	c
1	10 ~ 40	19.1	84.2	111.6
2	40 ~ 70	92	86.4	185.4
3	70 ~ 100	165.8	86.4	259.2
4	100 ~ 150	264.2	111	382.2

PART LIST

6	FEEDBACK LEVER	STS304	1
5	PRESSURE GAUGE	STS304	1
4	BLOCK GAUGE	ALDC12	1
3	JUNCTION BOX	ALDC12	1
2	COVER BASE	ALDC12	1
1	BODY BASE	ALDC12	1
NO.	PART NAME	MATERIAL	Q'TY

SPECIFICATIONS

Acting Type			Single or Double
Input Signal			4 ~ 20mA
Impedance			250±15Ω
Working fluid			Compressed air
Max. working pressure			0.7 MPa
Min. working pressure			0.14 MPa
Air Consumption (sup=0.14MPa)			<2.5 LPM
Flow Capacity (sup=0.14MPa)			>80LPM
Ambient Temp.	Operating Temp.		-20°C ~ 70°C (Standard) -40°C ~ 70°C (Low Temp.) -63°C ~ 70°C (Ultra Low Temp.) -20°C ~ 120°C (High Temp.)
	Explosion Temp.	ATEX	T5 : -40°C ~ 60°C T6 : -40°C ~ 40°C
		EAC	T5 : -63°C ~ 60°C
Explosion Proof			Ex ia IIC T5/T6 Gb Ex db mb IIB T5/T6 Gb Ex db mb IIC T5/T6 Gb
Protection			IP66
Air Connection			PT1/4 or NPT1/4
Gauge Connection			PT1/8 or NPT1/8
Conduit entry			G(PF)1/2 or NPT1/2 or M20
Pressure Gauge			Ø42, Max. 0.8MPa
Stroke			10 ~ 150mm
Linearity			Single ±1.0% F.S. Double ±2.0% F.S.
Hysteresis			±1.0% F.S.
Sensitivity			Single ±0.2% F.S. Double ±0.5% F.S.
Repeatability			±0.5% F.S.
Housing Material			Aluminum die-cast
Weight			2.8kg

SURFACE TEXTURE		WEIGHT	g	PROJECT	-
FINISH		SHEET No.	1 / 1	PRODUCT NAME	ELECTRO-PNEUMATIC POSITIONER
MATERIAL		UNIT	mm	MODEL	TS600
QUANTITY		SCALE	1 / 3	TITLE	LINEAR FLAME PROOF
OTHERWISE NOTE		PROJECTION	3RD ANGLE	DWG. NO.	TS600 EP 01 A1
GENERAL DIM		DWG SIZE	A3		2