


Bushing Type Current Transformer (BCT)

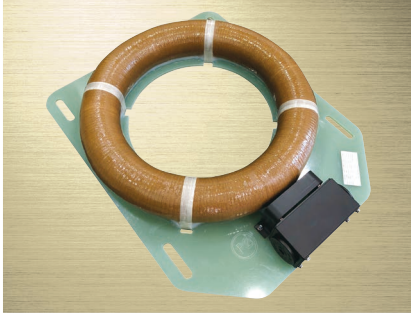

- Standard : IEEE C 57.13
- Type : **BC394**
- Application : For Metering & Protection
- Frequency : 60 Hz (Others on request)
- Insulation Level : 0.6 BIL 10kV full wave
- Continuous Thermal Current Rating Factor :
1.33 at 30°C Amb. 1.0 at 55°C Amb.
- Secondary Terminal : 20A 용 단자대
- Insulation : Epoxy Varnished

- ◆ 외부 자계의 영향을 받지 않도록 설계 제작된 제품
- ◆ 발전기용 CT에 적합하도록 설계 제작된 제품

Specification

Current Ratio (A)	Protection Class	Metering Class	비 고
7000 / 5	C800 (200VA)	0.3B - 1.8 (45VA)	※ 외형치수는 주문사양에 따라 변경될 수 있음.
8000 / 5			
9000 / 5			
10000 / 5			
12000 / 5			
14000 / 5			
15000 / 5			
16000 / 5			
20000 / 5			
22000 / 5			
25000 / 5			
40000 / 5			
50000 / 5			

Dimension & Drawing

