


# 링브로워 (Ring Blower)




| 제품명<br>Model | 전원<br>Source<br>(V) | 주파수<br>Fre-<br>quency<br>(Hz) | 전류<br>Current<br>(A) | 모터출력<br>Motor<br>Output<br>(KW) | 최대정압<br>Compressor(토출)<br>Air Pressure<br>(mmAq) | 최대정압<br>Compressor(흡입)<br>Air Pressure<br>(mmAq) | 최대풍량<br>Air<br>Volume<br>(CMH) (CMM) |     | 중량<br>Weight<br>(kg) |
|--------------|---------------------|-------------------------------|----------------------|---------------------------------|--------------------------------------------------|--------------------------------------------------|--------------------------------------|-----|----------------------|
| DKB-1300S-1  | 1Ø 220V             | 60                            | 8.4                  | 1.3                             | 1,900                                            | 1,800                                            | 175                                  | 2.9 | 17                   |
| DKB-1500S-1  | 1Ø 220V             | 60                            | 11                   | 1.75                            | 1,800                                            | 1,800                                            | 255                                  | 4.3 | 24                   |
| DKB-1500T-1  | 3Ø 220/380V         | 60                            | 5.89/3.4             | 1.5                             | 2,200                                            | 2,100                                            | 175                                  | 2.9 | 18                   |
| DKB-2200S-1  | 1Ø 220V             | 60                            | 15.7                 | 2.55                            | 2,300                                            | 2,450                                            | 315                                  | 5.3 | 28                   |
| DKB-2200T-1  | 3Ø 220/380V         | 60                            | 9.21/5.32            | 2.55                            | 2,900                                            | 2,600                                            | 255                                  | 4.3 | 26.3                 |

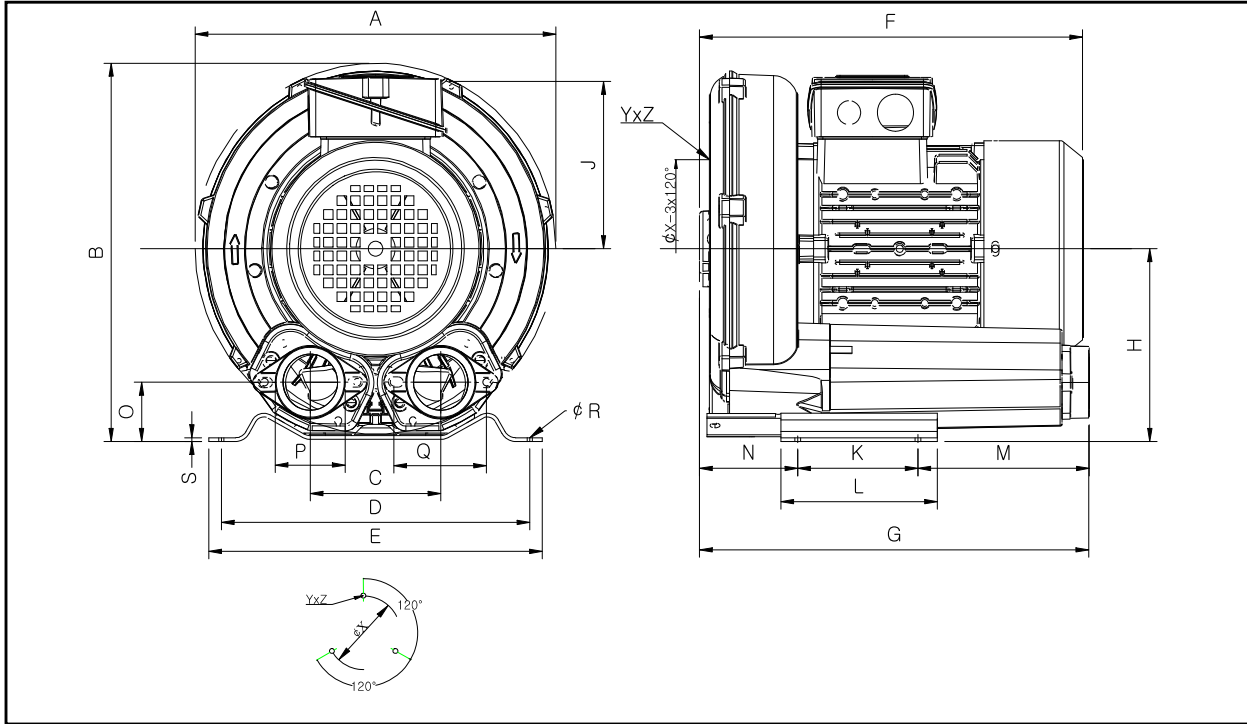

## Dimension

| Model       | A   | B   | C   | D   | E   | F   | G   | H   | J   | k   | L   | M   | N  | O  | P        | Q  | φR | S | φX  | YxZ   | X drillings  |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----------|----|----|---|-----|-------|--------------|
| DKB-1300S-1 | 296 | 301 | 115 | 225 | 255 | 325 | 256 | 153 | 127 | 95  | 130 | 85  | 76 | 45 | 1½"[40A] | 72 | 12 | 4 | 174 | M6x15 | 0°/120°/240° |
| DKB-1500S-1 | 340 | 345 | 120 | 260 | 295 | 370 | 315 | 175 | 140 | 115 | 155 | 110 | 90 | 48 | 2"[50A]  | 83 | 14 | 4 | 200 | M8x20 | 0°/120°/240° |
| DKB-1500T-1 | 296 | 301 | 115 | 225 | 255 | 325 | 256 | 153 | 127 | 95  | 130 | 85  | 76 | 45 | 1½"[40A] | 72 | 12 | 4 | 174 | M6x15 | 0°/120°/240° |
| DKB-2200S-1 | 365 | 375 | 120 | 290 | 325 | 378 | 336 | 190 | 140 | 140 | 180 | 106 | 90 | 55 | 2"[50A]  | 83 | 15 | 6 | 226 | M8x20 | 0°/120°/240° |
| DKB-2200T-1 | 340 | 345 | 120 | 260 | 295 | 370 | 315 | 175 | 140 | 115 | 155 | 106 | 90 | 48 | 2"[50A]  | 83 | 14 | 4 | 200 | M8x20 | 0°/120°/240° |

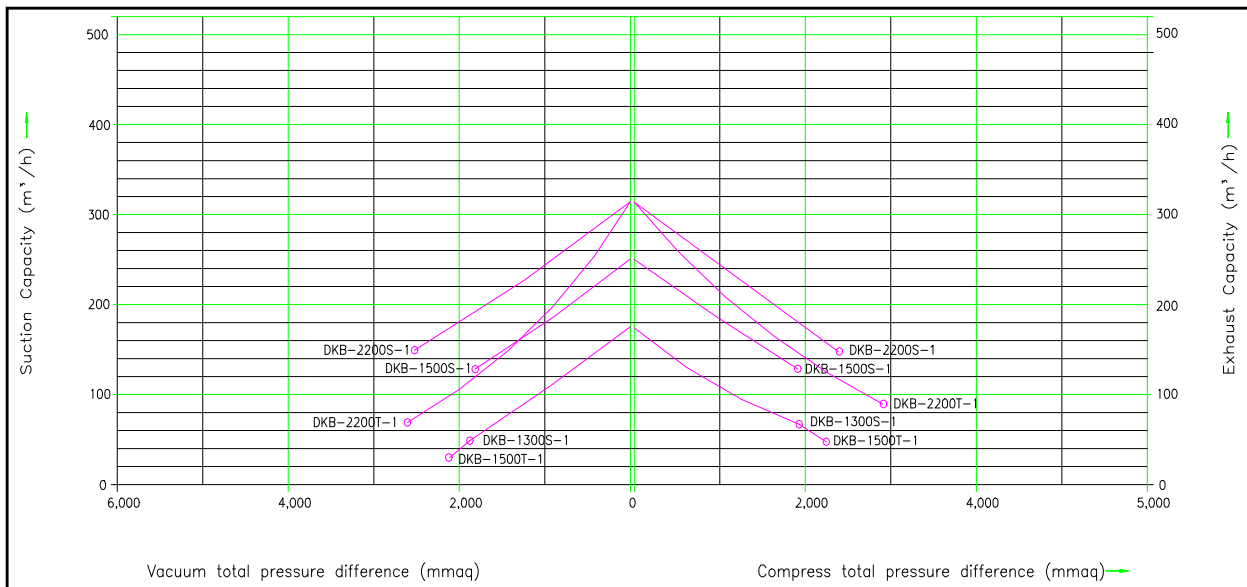

### ◆ 제품 특징

- 오일사용이 없어 공기가 깨끗하다
- 설치가 용이하고 유지보수비가 적게 든다

### ◆ 제품 사용장소

- 정화조 오폐수처리장
- 양식장의 산소공급
- 분입체의 이송(PVC, 폴리에틸렌, 플라스틱수지등)
- 섬유기계산업(편직기, 방직기계등)
- 곡물류의 이송(식품기계)
- 각종 세척기
- 환기 및 배출장치