



## CAROUSEL LEAK TESTER

FOR TIGHT HEAD DRUMS OR OPEN TOP PAILS  
FROM 10L TO 30L





WITH 10 TESTING HEADS

UP TO 50 CPM

AUTOMATIC CAN HEIGHT ADJUSTMENT

AUTOMATIC LEAKING CAN EJECTION


## PRESSURED AIR TEST PRINCIPLE

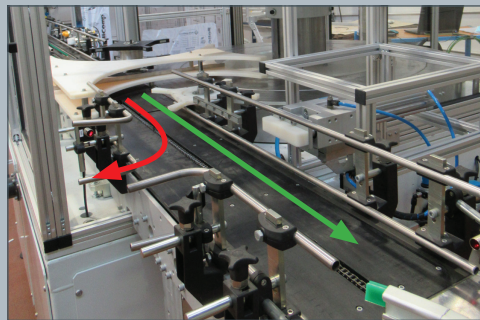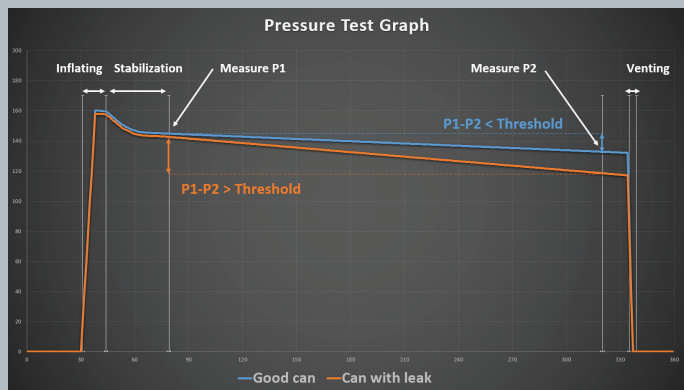

- Located at the end of the machine, a pneumatic ejector allows to reject automatically the faulty cans

## FEATURES:

- Testing head driven downward by mechanical cam
- Leak detection thanks to very sensitive pressure difference transducer
- Compressed air buffer tank to prevent air supply pressure variation

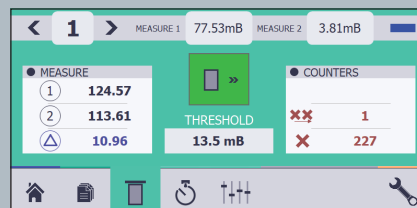


- User-friendly touchscreen panel
  - Reject point adjustable from the control panel
  - Settings are recorded in recipes
  - Tests results can be saved to a USB drive **USB**
- Remote access via OPC-UA for distant troubleshooting

## TECHNICAL SPECIFICATIONS

Cans diameter:	200 to 330 mm*
Cans height:	175 to 525 mm*
Speed:	50 CPM
Sensitivity:	leak as small as a $\varnothing 0.3$ mm hole**

\*Contact us for more customization

\*\*smallest detectable leak measured at 50 CPM on a 20 liters can

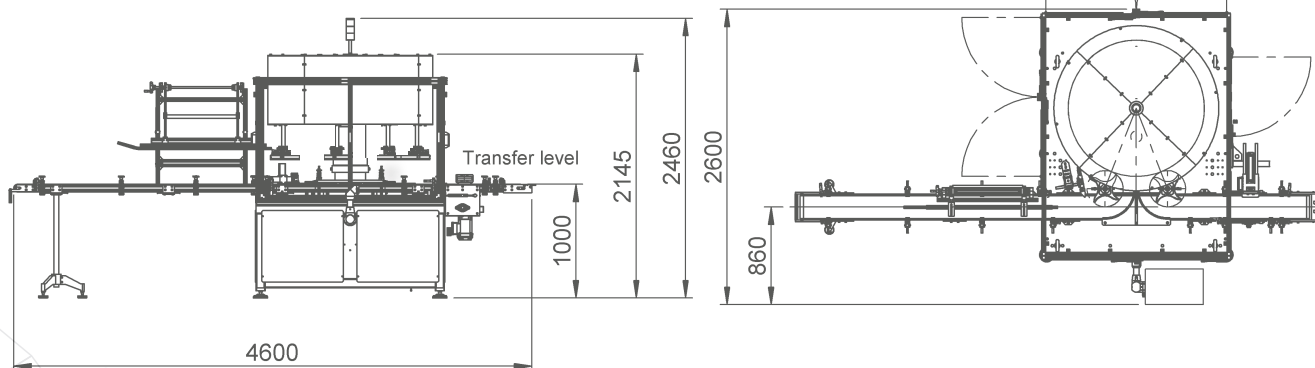

Sabatier SAS N° 31 Avenue de Rome F-13127 Vitrolles  
 Phone +33 442 46 94 00  
 E-Mail [info@sabatier.fr](mailto:info@sabatier.fr) [www.sabatier.fr](http://www.sabatier.fr)

**Sabatier**  
 SQUADRONIC GROUP  
 Technology that keeps you ahead