


RAPIDO II™

Affordable & Reliable handheld oximeter

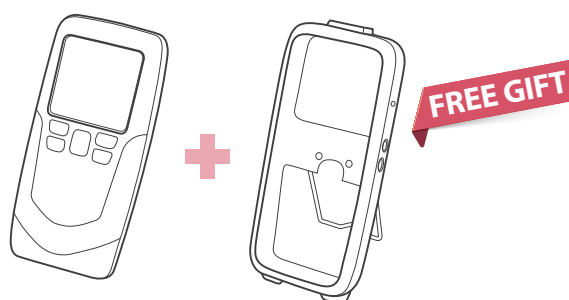

- Nellcor Compatible probes
- SIMPLE & EASY TO USE DESIGN
- Protective Boot Stand included
- For ALL AGES
- IV Pole Clamp(OPTION)
- **DIGI-VIEW™** PC monitoring S/W Available (OPTION)

Configuration CHART for RAPIDO II™

Cat No.	Configuration combination					Basic Components and Accessories							
	Prmtr1	Prmtr2	Prmtr3	Prmtr4	Prmtr5	DV	UM	S1	BT1	BT1	BT1	BT1	V1
100120	x	x	x		x								

INDEX	EtCO ₂	ECG	NIBP	SpO ₂	Temp	<Accessory codes>							
						DV : Main Device	UM : User's Manual	S1 : SpO ₂ Adult Sensor	BT1 : AA size alkaline drycell battery	V1 : Protective boot			

[Specification]

Performance

Measurement Range	
SpO ₂	0 to 100%
Pulse Rate	30 to 250 bpm
Perfusion	0.05 to 20%
Pulse-rate Range/ Accuracy	
30 to 250bpm	±3 digits

Saturation Accuracy		
Adult/Pediatric	70 to 100%	±2 digits
	50 to 69%	±3 digits
	0 to 49%	unspecified
Neonate	70 to 100%	±3 digits
	50 to 69%	±4 digits
	0 to 49%	unspecified

General

Display	CHARACTER LCD
Display Parameter	SpO ₂ Percentage, Pulse Rate, Battery Status, Pulse bar, Perfusion Index Bar, Alarm Status
Alarm	• All Parameters on / off Selective • Independently • Silence : 2minutes

Physical Properties

Weight	127g without batteries
Dimensions	154mm x 72mm x 26mm

Electrical Properties

Battery	
Type	1.5V AA size alkaline(dry cell) x 4 EA
Battery Capacity	up to 20 continuous hours

Classification

- IEC60601-1
- IPX1
- ISO 9919
- EN/IEC60601-1-2

Output

RS232 digital output from serial port

Environmental

Operating Temperature	5 to 35°C
Transport / Storage Temperature (in shipping carton)	-20 to 70°C
Operating Humidity	30 to 85%, non condensing
Operating Altitude	0 to 2,000m

ORDERING

#100120 RAPIDO II Handheld Pulse Oximeter with Akaline battery

WARRANTY

2 years Warranty on the device / 6 months for accessories.

Basic Components & Accessories

- RAPIDO II Device 1ea
- Protective BOOT COVER 1ea
- AA size Alkaline(dry cell) battery 4ea
- Adult reusable SpO₂ Sensor 1ea
- User's Manual 1ea

Optional Accessories

- SpO₂ Sensor (pediatric, neonate, VET), (1M, 3M)
- Extension cable
- External mobile printer
- PC software DIGI-VIEW™
- IV POLE CLAMP

Regulatory Model Number : CX120
 Brand Name : RAPIDO II

CE
 0120