



제품명 Model	전원 Source (V)	날개크기 Impeller Size (cm)	주파수 Fre- quency (Hz)	전류 Current (A)	소비전력 Power Input (W)	회전수 Revolution per minute (RPM)	모터출력 Motor Output (KW)	극수 Pole (P)	최대풍량 Air Volume (CMM) (CFM)		최대정압 Air Pressure (mmAq) (pa)		중량 Weight (kg)
DVR-400	1Ø 220V	40	50	0.90	130	1,460	0.25	4	65	2,295	22	215	26
			60	1.30	225	1,750			75	2,650	30	295	
	3Ø 220/380V	40	50	1.55/0.90	175	1,465	0.25	4	65	2,295	22	215	26
			60	1.15/0.67	185	1,740			75	2,650	30	295	
DVR-500	1Ø 220V	50	50	1.30	220	945	0.4	6	100	3,530	13	130	32
			60	1.50	300	1,110			120	4,240	18	180	
	3Ø 220/380V	50	50	1.45/0.84	240	945	0.4	6	100	3,530	13	130	32
			60	1.45/0.84	315	1,085			120	4,240	18	180	
DVR-600	1Ø 220V	60	50	2.50	420	965	0.5	6	175	6,180	15	145	40
			60	2.90	570	1,130			210	7,415	21	205	
	3Ø 220/380V	60	50	3.00/1.73	400	950	0.5	6	175	6,180	15	145	36
			60	2.60/1.50	520	1,140			210	7,415	21	205	

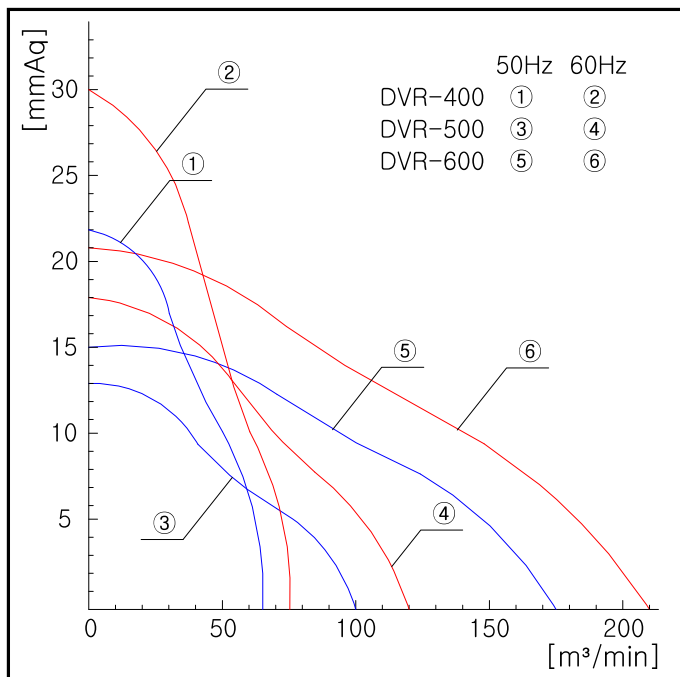

Dimension

Model	A	B	C	D	E	F
DVR-400	Ø900	300	□ 620	475	230	195
DVR-500	Ø900	400	□ 720	490	230	210
DVR-600	Ø1,100	450	□ 815	560	300	210

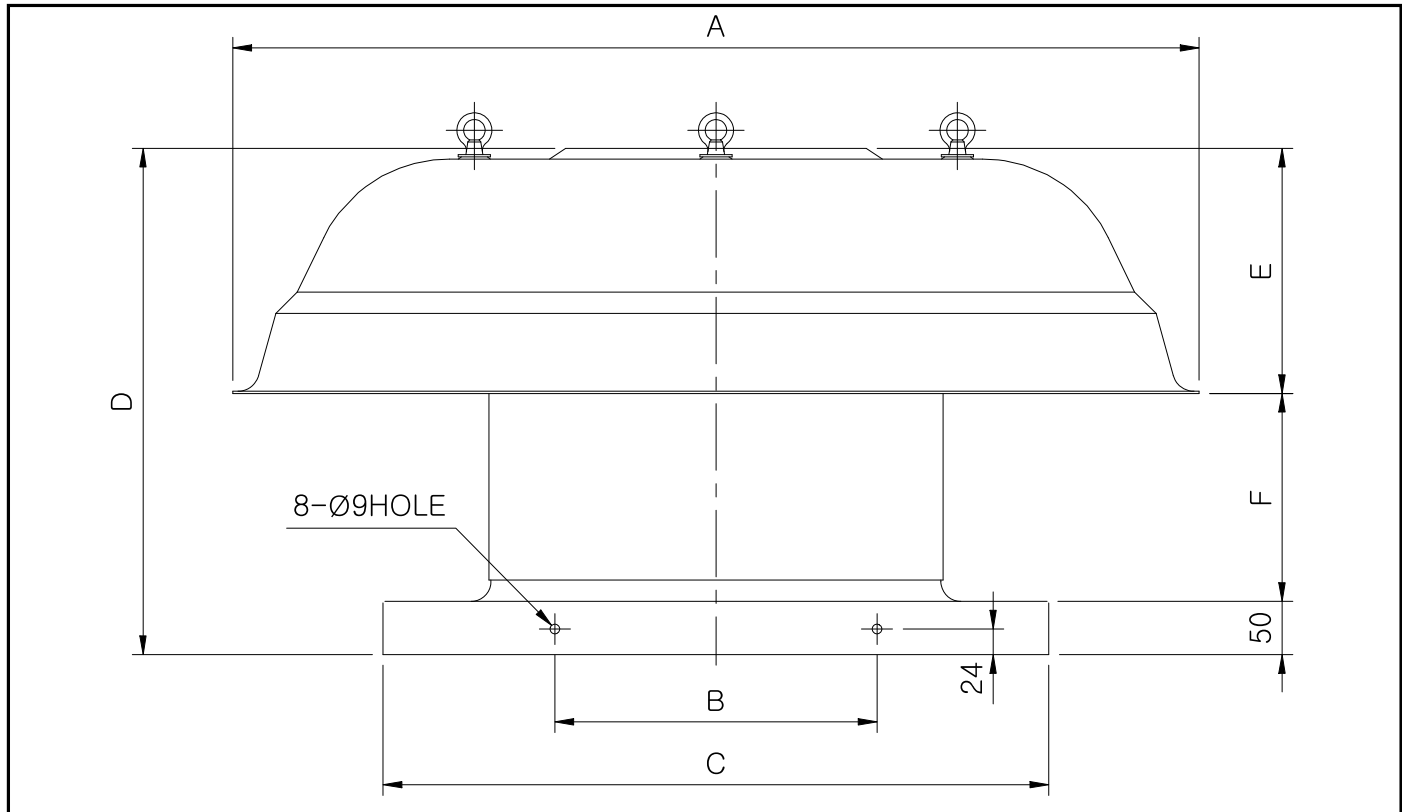

◆ 제품 특징

- 기존 제품보다 경량화시키고 풍량이 우수함
- 배출저항을 최소화하고 역풍방지를 위한 최적의 설계
- 시공이 편리하고 내구성이 우수

◆ Feature

- Excellent air follows compared to other products.
- Minimize the exhausting resistance and optimum design to prevent an adverse air follows.
- Easy to install, Excellent durability.