


Twin Screw Weighing Feeder CE-T




Material example

- Pellet
- Resin powder
- Calcium carbonate
- Talc
- Crushed sheet
- Glass fiber
- Carbon fiber




Product feature



Construction

Screw profile

- MS Type (mainly for powder)
- OS Type (mainly for powder and particles)
- BS Type (mainly for powder and particles)
- OSP Type (mainly for pellets)
- BSP Type (mainly for pellets)

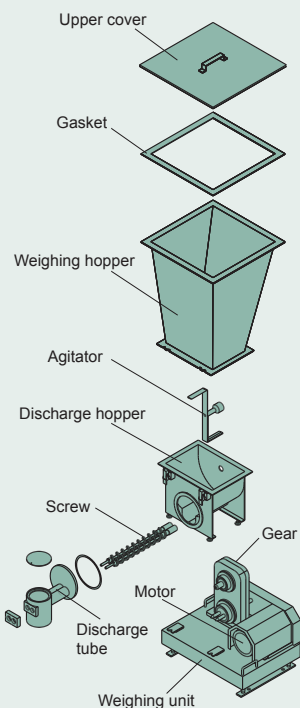

Feature


- Applicable to light bulk density materials such as pulverized sheet because of its wide opening to the screw area.
- Flame explosion proof option is available.
- Heat resistance option for high temperature materials.

Specifications

Model	Flow rate range	Hopper capacity	Weighing capacity	Feeder weight	Power supply
CE-T-1E CE-T-1E-MP	4- 400L/h	25L	30kg	Approx. 95kg Approx. 125kg	200-240 AC, 1 phase, 1.3 kVA
CE-T-2E CE-T-2E-MP		50L	30kg	Approx. 100kg Approx. 130kg	
CE-T-3E CE-T-3E-MP	40-2000L/h	100L	100kg	Approx. 190kg Approx. 240kg	200-240 AC, 1 phase, 3.1 kVA
CE-T-4E CE-T-4E-MP		200L	200kg	Approx. 210kg Approx. 260kg	

The models having "-MP" are feeder mounted panel type.

Dimensions

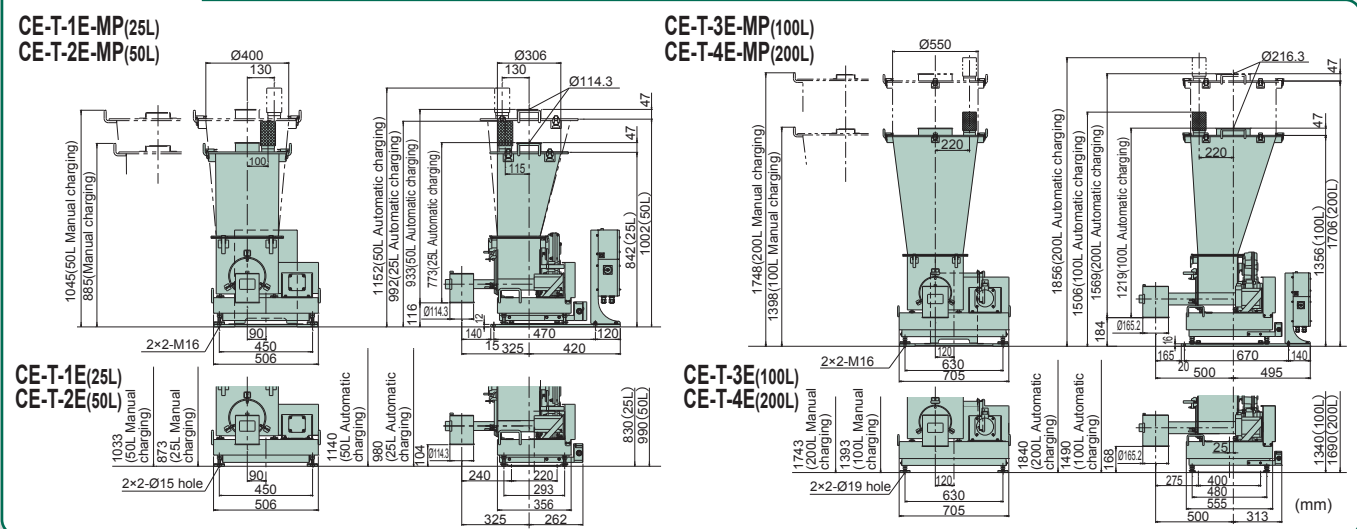


Single Screw Weighing Feeder CE-M




Material example

- Pellet
- Resin powder
- Calcium carbonate
- Talc
- Titanium oxide
- Carbon black

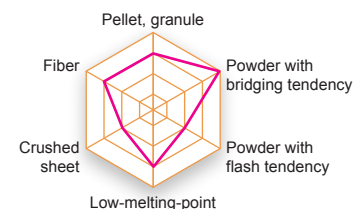


Product feature



Construction

Screw profile

- OS Type (mainly for powder and particles)
- BS Type (mainly for powder and particles)

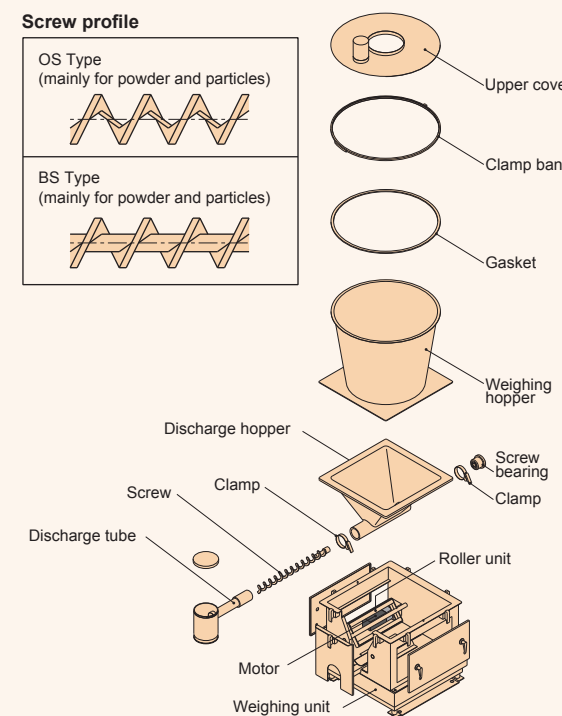

Feature

- Wide range of material handling including high bridging material.
- Material replacement is quick by changing whole hopper.
- Flexible layout plan is available due to optional screw extension. (It depends on the materials and the conditions. Please ask our sales.)

Specifications

Model	Flow rate range	Hopper capacity	Weighing capacity	Feeder weight	Power supply
CE-M-1E CE-M-1E-MP	1- 200L/h	25L	30kg	Approx. 85kg Approx. 110kg	200-240 AC, 1 phase, 0.5 kVA
CE-M-2E CE-M-2E-MP		50L	30kg	Approx. 90kg Approx. 115kg	
CE-M-3E CE-M-3E-MP	10-1100L/h	100L	100kg	Approx. 180kg Approx. 230kg	200-240 AC, 1 phase, 0.9 kVA
CE-M-4E CE-M-4E-MP		200L	200kg	Approx. 200kg Approx. 250kg	

The models having "-MP" are feeder mounted panel type.

Dimensions

