



KTP-3000 Series

Positive-Displacement Flow meter
Accurately Measures the Volume

■ FEATURE

- Capable of measuring a variety of fluids including water, oil, and chemicals
- Flange type or screw type can be selected
- DC / AC power type or battery type is selectively available
- No need for a straight piping section
- Possible to measure highly viscous fluids
- High accuracy of measurement and capability of measuring minute flow rates
- Customized piping installation length

■ APPLICATIONS

- ▶ General industry
 - Utility Use : Auxiliary and supply lines used in energy distribution
- ▶ Chemical and Other Process industry
 - Batching and mixing in the reactor
- ▶ Food and Beverage
 - Quantitative measurement, settlement, charge
 - Mass flow rate measurement of ice cream and milk
 - Flow measurement of brewing process
- ▶ Pharmaceutical Industry
 - Quantity distribution, charging
- ▶ Water resource


KTP-3000 Series General Specifications

Size	15A (1/2") - 50A (2")
Process Connection	Flange type - KS / JIS / ANSI / ASME / DIN Std. Taper Pipe Thread type (PT)
Flow Ranges	Excess 5cP - 2 L/min ~ 350 L/min Under 5cP - 3 L/min ~ 300 L/min
Accuracy	±0.5 % F.S
Repeatability	0.03 %
Fluid Temperature	Max. 120 °C (Option 200 °C)
Ambient Temperature	-25 °C ~ 60 °C
Max. Pressure	Max. 20 kgf/cm ² .G (Option 55 kgf/cm ² .G)
Max. Viscosity	1000 Centipoise
Power Supply	AC 220 V / DC 24 V / 3.6 V battery
Display	LCD Display with Backlight (Flow rate, Totalizer)
Output	DC 4-20 mA, Pulse

MODEL CODE

K T P - 3 0 0 0	-	□	-	□	Specification
		S			Pulse type without Indicator
		F			AD 110/220V or DC 24V (4-Wire) type with Indicator
		M			3.6 V battery type with Indicator
				F	Connection - Flange Type
				T	Connection - Screw Type

STRUCTURAL DRAWING

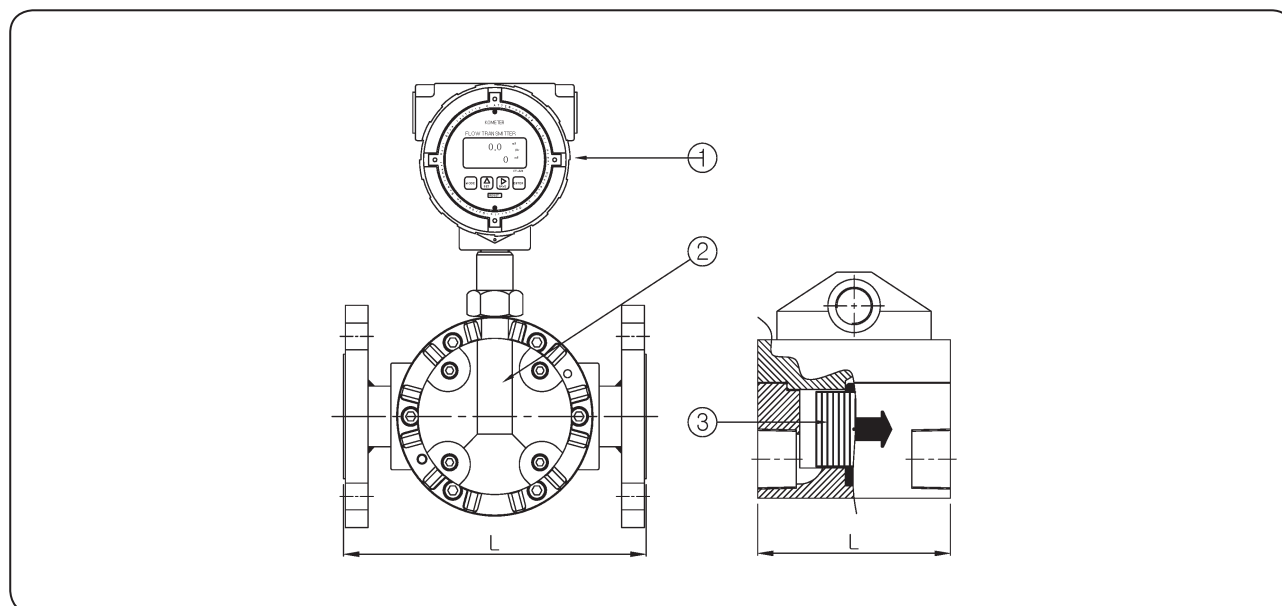

DEMENSIONS

Connector Size		L(mm)	
		Flange	Screw
15A	1/2B	180	90
25A	1B	220	170
40A	1-1/2B	250	200
50A	2B	280	230

* Customized piping installation length(L)

STANDARD MATERIAL

No.	Description	Material
1	Indicator	ADC12
2	Body	316SS
3	Gear	316SS

FLOW RANGE

Connector Size		Flow ranges (LPM)	
		5 cP 초과	5 cP 미만
15A	1/2B	1-30	1-30
25A	1B	3-100	5-100
40A	1-1/2B	6-200	10-200
50A	2B	10-300	15-300

STRAINER

Connector Size		Strainer mesh	Clearance
15A	1/2B	60	0.0092
25A	1B	60	0.0092
40A	1-1/2B	60	0.0092
50A	2B	60	0.0092