




- 옥내용
For Indoor
- 단상 접지형
Single Phase,
Line to Earth Voltage Transformer
- 일반 계기 및 보호계전기 용
For Metering & Protection
- Epoxy Mold로 절연특성 강화
Insulation : Epoxy Vacuum Molding.

■ Dimension & Drawing

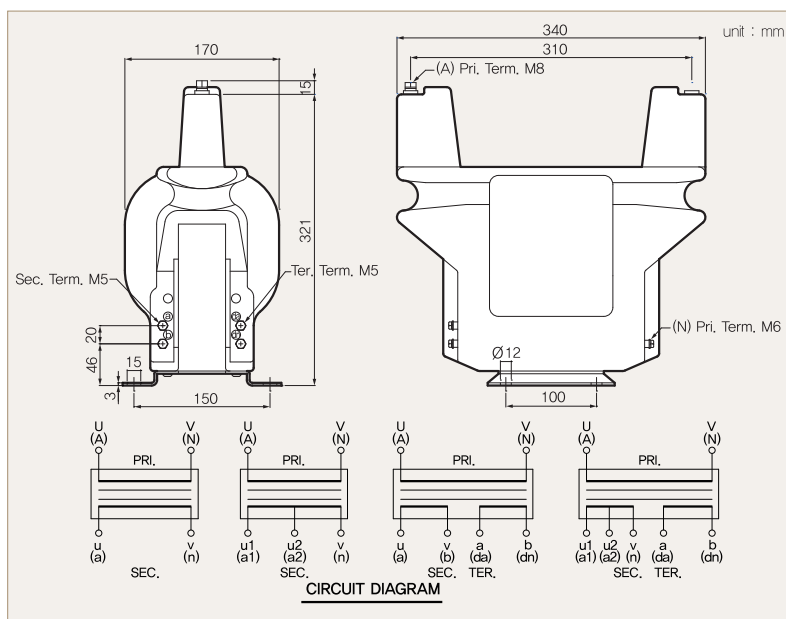

■ Specification

Standard	KS C 1706	JEC 1201	IEC 61869-3
Max. Voltage	25,8 kV	23 kV	24 kV
Primary Voltage	22900/ $\sqrt{3}$ V		
Secondary Voltage	110/ $\sqrt{3}$ or 190/ $\sqrt{3}$ V		
Tertiary Voltage(Residual winding)	–	110/3 or 190/3 V	110/3 or 190/3 V
Insulation Level	25,8 / 50 / 125 kV (20B)	23 / 50 / 125 kV	24 / 50 / 125 kV
Accuracy Class	0,5 or 1,0 or 3,0	1P / 3G	1,0 / 3P
Over Voltage Factor	1,1Vn Continuous / 1,9Vn(30min)		1,2Vn Continuous / 1,9Vn(30s) or 1,2Vn Continuous / 1,9Vn(8h)
Frequency	60 Hz (Others on request)		

※ 상기의 정격 1차, 2차 전압은 표준형이며, 그 외의 전압비의 제품도 생산 가능합니다.

Above rated primary and secondary voltage is standard type, and besides, can be manufacture the another voltage ratio products.

■ **Rated Output**

Accuracy Class			Type & Rated Output Burden			
KS C 1706	JEC 1201	IEC 61869-3	NE1	NE1D	NE1T	NE1DT
0,5	—	0,5	50	50	—	—
1,0	1P	1,0	100 or 200	100 or 200	—	—
3,0	3P	3,0	300	300	—	—
—	1P/3G	1,0 / 3P	—	—	100 / 200	100 / 200
—	—	1,0 / 3P	1,2Vn Continuous / 1,9Vn(8h)		—	50 / 100
Weight			≅ 26,0 kg			

■ 1' ry / 2' ry Voltage : 생산 전압비 (Option)

1차 전압 (V)	2차 전압 (V)	3차 전압 (V)
13200/ $\sqrt{3}$, 16500/ $\sqrt{3}$, 22000/ $\sqrt{3}$, 22800/ $\sqrt{3}$, 22900/ $\sqrt{3}$	110/ $\sqrt{3}$, 120/ $\sqrt{3}$, 190/ $\sqrt{3}$	110/3, 190/3