




RP102P

PoC/CoC/EX-SDI/HD-SDI 리피터

제품특징

- PoC/CoC/EX-SDI/Non-PoC 지원하는 HD-SDI 리피터
- 동축케이블을 통한 전원공급 가능 (PoC)
- 동축케이블을 통한 제어 가능 (CoC)
- 리피터 여러대를 사용하여 전송 거리 확장 가능 (PoC 카메라와 PoC DVR 사이에 최대 2대 설치 가능)
- 전원, 비디오 입력, PoC 출력, RS485 출력을 표시하는 LED 지원
- 전원 입력 및 RS485 출력을 위한 추가 단자

외관도 (Unit : mm)

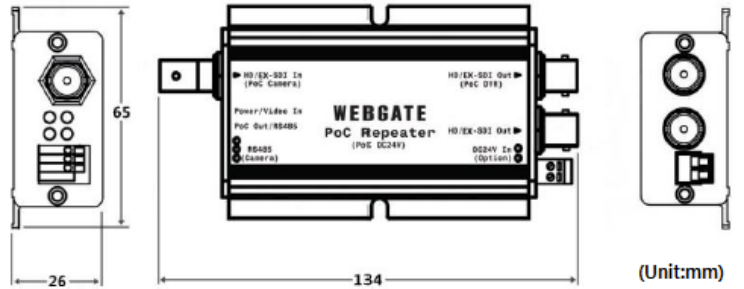

제품사양

VIDEO INPUT

Video input standard	1CH (SD-SDI SMPTE 259M, 270Mbps) (HD-SDI SMPTE 292M, 1,485Gbps) (EX-SDI)
Resolution	SMPTE 274M(1080p30/25)

VIDEO OUTPUT

Video output standard	2CH (SD-SDI SMPTE 259M, 270Mbps) (HD-SDI SMPTE 292M, 1,485Gbps) (EX-SDI) ** 1CH is for PoC DVR
Resolution	SMPTE 274M(1080p30/25)

PERFORMANCE

Function	Equalizing, Reclocking, Cable driving, Control Upstream
PoC	Power over Coax, Max.16W (DC24V)
CoC	Camera control data transmission, Max. 57600bps

INTERFACE

Indication LED	Power(Red), Video In(Green), PoC Out(Red), RS485 Out(Green)
RS485 out	Terminal block
Power input	Terminal block (Additional Power Input DC24V)

ENVIRONMENTAL & PHYSICAL

Dimension	134(W) x 65(D) x 26(H) mm
Weight	Approx. 160g(0.35 lbs)
Operating temperature	0°C to +50°C / 20%RH to 80%RH
Power consumption	DC12V / DC24V, Max 2.5W
Approval	KC, FCC, CE, RoHS