Lassele
your first selection

Deluxe Top Mount

LRT-771PC/LFT-771PC

Design Features

STAINLESS STEEL INTERIOR AND EXTERIOR

The excellent quality of stainless steel helps minimize dents, scratches, and rust, in addition, our stainless steel offers long-life durability and easy maintenance. Ergonomic designs for the best kitchen working environment

Model	Sort	Exterior Dimensions	Capacity	No. of Shelves
LRT-771PC	Refrigerator	mm : 680 x 787 x 2092 Inch : 26.8 x 31 x 82.4	620ℓ 22 cu.ft.	4EA
LFT-771PC	Freezer			

▲Low Energy Consumption meeting the Energy Star specs
▲Bottom Mounted Condensing Unit in easy access for the maintenance
▲Computerized thermometer and temperature controller with the Digital Display, which enables the efficient energy consumption, defrost system, and self-check menu
▲One Whole Piece of PUF Insulated body
▲Reliability proven cycle systems with HCFC refrigerant.
▲Easy-wipe flexible magnetic rubber gaskets proved for energy efficient sealing
▲Field Reversable Doors(with optional kit)
▲Durable and anti corrosive coated height adjustable shelf
▲Standard with 5" Casters with a brake for added mobility and easy arrangement
▲Spring assisted self closing doors with stay open feature for highest convenience
▲Easy access to the condensing unit
▲Capacity up to 136kg per caster
▲Door Locking system

Technical Features

▲Evaporation tray
▲Drain hole inside the cabinet
▲Export standards packing (Wooden and wrapped package)

Temperature Range

▶Refrigerator
-3~7°C / 27~45°F

▶Freezer
-24~-3°C / -11~27°F

Refrigerator / Freezer

LRT-771PC
LFT-771PC

Plan View

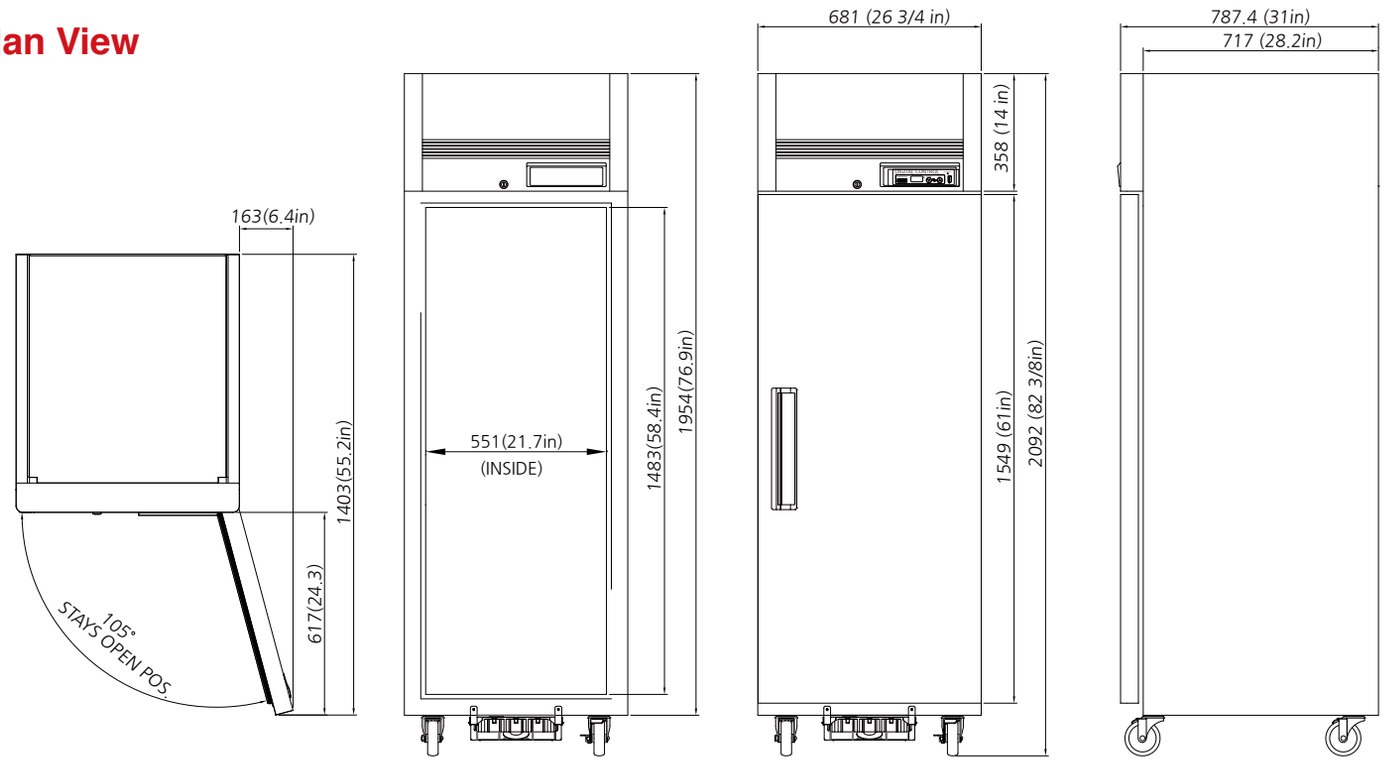

Model		LRT-771PC	LFT-771PC
Sort		Refrigerator	Freezer
Capacity	liter	620ℓ	
	cu.ft.	22 cu.ft.	
ExteriorDimensions (W x D x H)	mm	680 x 787 x 2092	
	Inch	26.8 x 31 x 82.4	
Interior Dimensions (W x D x H)	mm	581 x 615 x 1510	
	Inch	22.9 x 24.2 x 59.4	
Net Weight(Kg)		106	112
Gross Weight(Kg)		120	124
No. of Casters		ROTATE 2EA, FIXED 2EA	
Door Type		1 Door	
No. of Shelves		4EA	
Compressor(Hp)	HP	1/3 Hp	1/2 Hp
Refrigerant	Gas	R-134a	R-404A
Range of Temperature		-3~7°C / 27~45°F	-24~-3°C / -11~27°F
Voltage/Frequence		220v/115v, 50hz/60hz	
Rated Input		350W	600W
Defrosting Type		N/A	

Optional Parts

▲Field Reversable
Door optional kit
▲Additional Tray, shelf clips

DAEYEONG E&B Co., Ltd.

55 Sandan-ro 163 Gil, Danwon-gu
Ansan-si, Gyeonggi-do, 425-851,
South Korea

Tel. +82(0)31-364-8961

Fax. +82(0)31-491-1603

E-Mail. hn.huh@daeyeong.co.kr

www.daeyeong.co.kr

Intertek