

Deluxe Bottom Mount

LRB-72T/LFB-72T



Design Features

STAINLESS STEEL INTERIOR AND EXTERIOR

The excellent quality of stainless steel helps minimize dents, scratches, and rust, in addition, our stainless steel offers long-life durability and easy maintenance. Ergonomic designs for the best kitchen working environment

Model	Sort	Exterior Dimensions	Capacity	No. of Shelves
LRB-72T	Refrigerator	mm: 2057 x 787 x 2099	1925ℓ	12EA
LFB-72T	Freezer	Inch: 81 x 31 x 82.6	68 cu.ft.	



- ▲ Low Energy Consumption meeting the Energy Star specs
- ▲ Bottom Mounted Condensing Unit in easy access for the maintenance
- ▲ Computerized thermometer and temperature controller with the Digital Display, which enables the efficient energy consumption, defrost system, and self-check menu
- ▲ One Whole Piece of PUF Insulated body
- ▲ Reliability proven cycle systems with HCFC refrigerant.
- ▲ Easy-wipe flexible magnetic rubber gaskets proved for energy efficient sealing
- ▲ Field Reversible Doors (with optional kit)
- ▲ Durable and anti corrosive coated height adjustable shelf
- ▲ Standard with 5" Casters with a brake for added mobility and easy arrangement
- ▲ Spring assisted self closing doors with stay open feature for highest convenience
- ▲ Easy access to the condensing unit
- ▲ Capacity up to 136kg per caster
- ▲ Door Locking system

Technical Features

- ▶ Evaporation tray
- ▶ Drain hole inside the cabinet
- ▶ Export standards packing (Wooden and wrapped package)

Temperature Range

- ▶ Refrigerator

-3~7°C / 27~45°F


- ▶ Freezer

-24~-3°C / -11~27°F

Refrigerator / Freezer

LRB-72T LFB-72T

Plan View

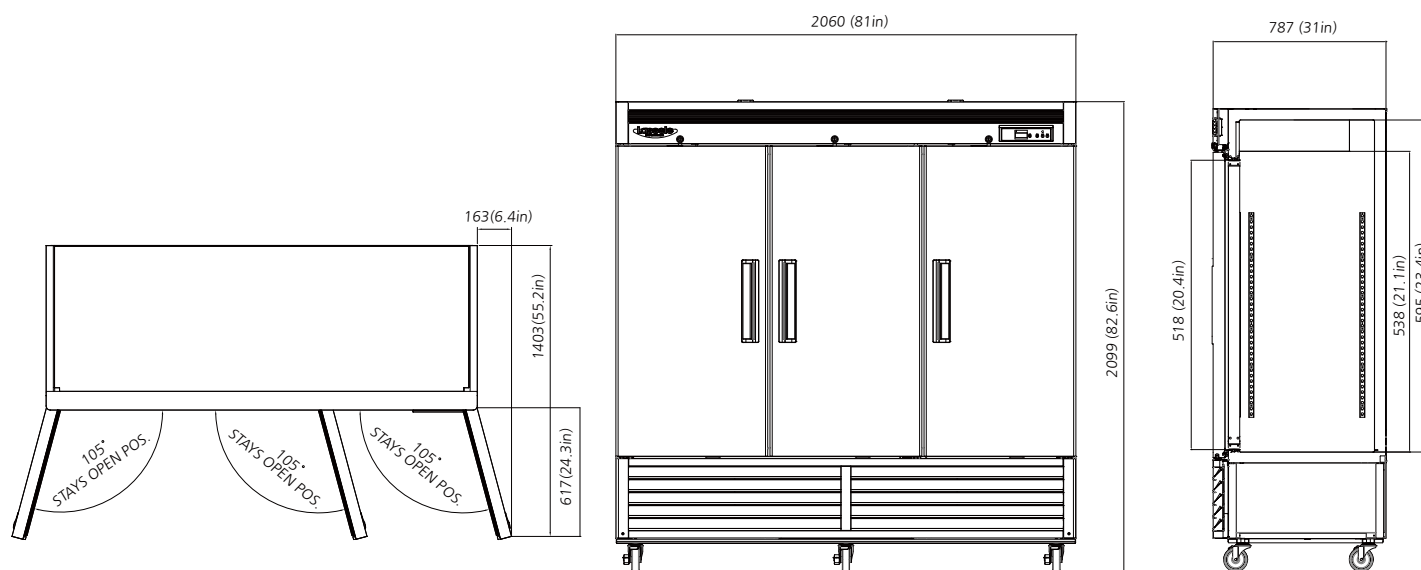

Model		LRB-72T	LFB-72T
Sort		Refrigerator	Freezer
Capacity	liter	1925ℓ	
	cu.ft.	68 cu.ft.	
ExteriorDimensions (W x D x H)	mm	2057 x 787 x 2099	
	Inch	81 x 31 x 82.6	
Interior Dimensions (W x D x H)	mm	1961 x 615 x 1510	
	Inch	77.2 x 24.2 x 59.4	
Net Weight(Kg)		270	283
Gross Weight(Kg)		288	295
No. of Casters		ROTATE 3EA, FIXED 3EA	
Door Type		3 Doors	
No. of Shelves		12EA	
Compressor(Hp)	HP	5/8Hp	1 Hp
Refrigerant	Gas	R-134a	R- 404A
Range of Temperature		-3~7°C / 27~45°F	-24~-3°C / -11~27°F
Voltage/Frequency		220v/115v, 50hz/60hz	
Rated Input		800W	1200W
Defrosting Type		Auto	

Optional Parts

- ▲Field Reversible
- Door optional kit
- ▲Additional Tray, shelf clips



DAEYONG E&B Co., Ltd.

55 Sandan-ro 163 Gil, Danwon-gu
Ansan-si, Gyeonggi-do, 425-851,
South Korea

Tel. +82(0)31-364-8961

Fax. +82(0)31-491-1603

E-Mail. hn.huh@daeyeong.co.kr

www.daeyeong.co.kr

