Cold Storage

육류저온저장고 / 근실(根實) 저온저장고

육류저온저장고 DS-95P

- 육류보관 및 저장실험, 저장온도변화실험, 숙성 실험등
- 온도 Slope time 상온에서 단계별로 온도를 설정할때 유지되는 온도와 하강온도 또는 상승온도 임의대로 지연설정 – 급격한 온도변화에 의한 스트레스를 억제
- 냉동기 On delay time Compressor 작동
- 정전 후 상전시 갑작스런 전원과다소비로 부터 기기를 보호하기 위해 냉동기가 정해진 시간만큼 지연 작동

근실(根實)저온저장고 DS-96S

- 나무,뿌리,열매의 보관.저장실험, 저장온도환경 변화실험
- 온도 Slope time 상온에서 단계별로 온도를 설정할때 유지되는 온도와 하강온도 또는 상승온도를 임의대로 지연설정 – 급격한 온도변화에 의한 스트레스를 억제
- 냉동기 On delay time Compressor 작동
- 정전 후 상전시 갑작스런 전원과다소비로 부터 기기를 보호하기 위해 냉동기가 정해진 시간만큼 지연 작동

DS-95P

Microprogram temperature control graph

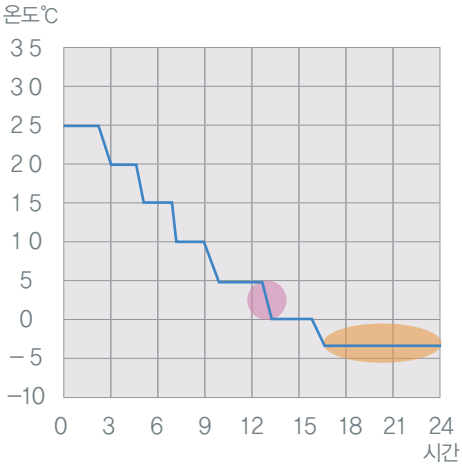

- 하강온도,상승온도를 임의로 지연시간조절가능
- 프로그램 종료시 정지 또는 보관 설정 온도로 계속 작동 가능

DS-96S

		DS - 95P	DS - 96S
Main controller		161step programmable microprocessor, after the end of the operational PID regulator in the culture or the storage temperature (8 seasonal cycles, 80 steps, 80 Slope hour program)	
Temperature		-5℃ to 10℃ / ±0.2℃ at -1℃	-20℃ to 60℃ / ±0.2℃ at -5℃
Temp.adjustable accuracy		±0.1℃ to ±10℃	
Temp. slope controller		Microprocessor temp slope up down time adjustable slope delay time(1min.-99hr.59min.)	
Dimensions Capacity	In	1200 x 750 x 1480	600 x 500 x 1000 (WxDxH)mm
	Liter	1332 liters	300
Material (In/Out)		Stainless steel (SUS 304) / Steel plate with powder coating(SCP-1)	
Circulation fan		Dual turbo fan 4ea	
Compressor		3/4HP	1/2HP
Evaporator		Auto exchange dual evaporator system	
Defrost device		Automatic defrost system	
Shelves		6ea Individually adjustable 1"centers	3ea Individually adjustable 1"centers
Illumination		Fluorescent light lamp 32W	
Defrost		8 min. defrost system	
Power		AC220V, 60Hz, 1.5Kw	AC220V, 60Hz, 1.3Kw