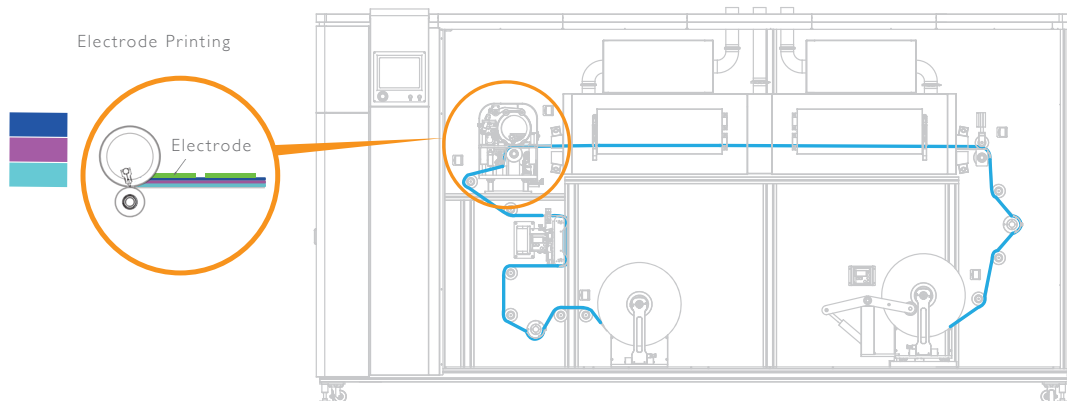


**MACHINE INFORMATION**

- Perfect for patterning implementation with R2R continuous process by rotary screen
- High accurate alignment with applying image sensor and actuator
- Option selection as per the coating material conditions : Hot Air Dryer, UV curing and IR heater

# ROTARY SCREEN R2R PRINTING SYSTEM

**SCHEMATIC DRAWING****SPECIFICATIONS**

Unit : mm

MACHINE SIZE	MACHINE SPEED	COATING METHOD	COATING WIDTH	WEB TENSION	DRYER	METERING PUMP
4600 x 1450 x 2350	0.1 ~ 10m/min	Rotary Screen x 1 Set	Max. 300	Max. 25 kg-f	Hot Air x 1 Set (Max.180°C)	Gear Pump

**DETAILS**