


MULTI LAMINATION R2R SYSTEM

MACHINE INFORMATION

- Simultaneously applied Double-Sided Lamination and De-Lamination
- High accurate alignment with applying image sensor and actuator for Lamination
- Enable Max. 200 kg-f pressurized to transfer the film to the next process
- Max.180°C heating capable with consist of 3 laminating rolls



SCHEMATIC DRAWING

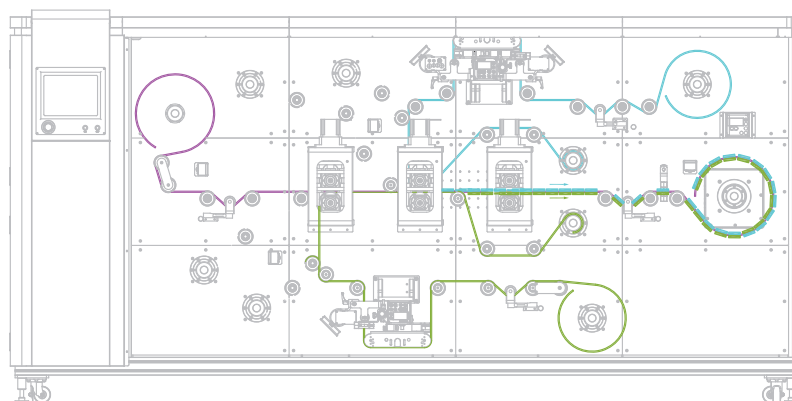

SPECIFICATIONS

Unit : mm

MACHINE SIZE	MACHINE SPEED	COATING METHOD	COATING WIDTH	WEB TENSION	HEATING ROLL
3500 x 1300 x 1800	0.01 ~ 5m/min	Laminating x 3 Set De-Laminating x 3 Set	Max. 530	Max. 25 kg-f	Max. 180°C, Pressure Max. 200 kg-f

DETAILS

