



MACHINE INFORMATION

- Well match to produce for dip coating products like Flat Sheet Membrane for Water Treatment
- Excellent to control coating thickness by roll blade
- Option in applied example: Hot Air Dryer, IR Curing Machine, UV Curing Machine according to the drying conditions of each material

DIP COATING  
R2R SYSTEM

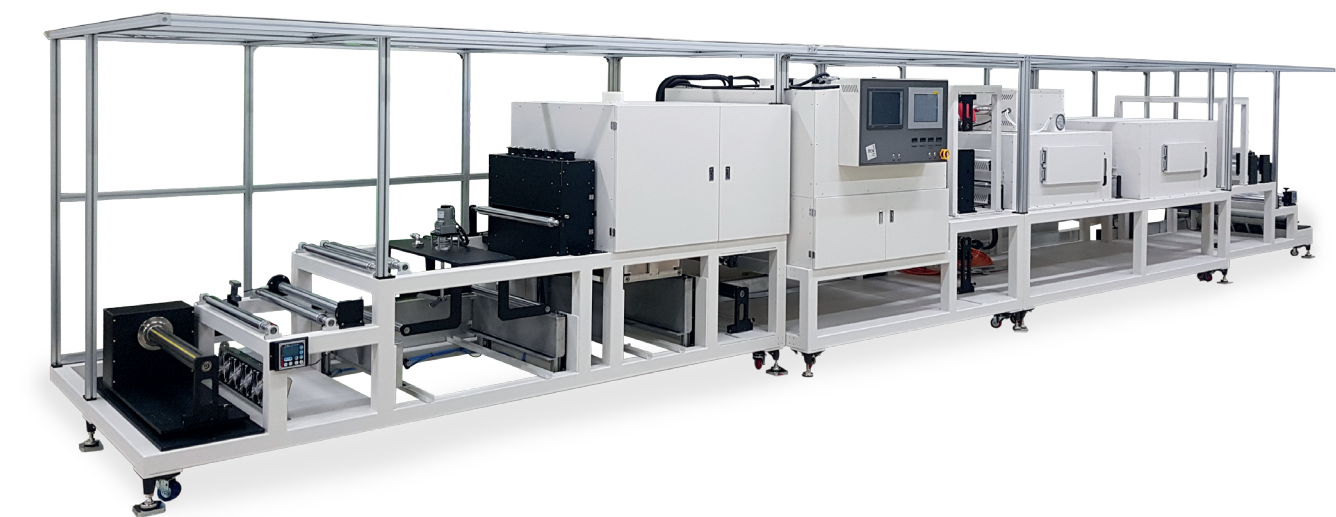

SCHEMATIC DRAWING

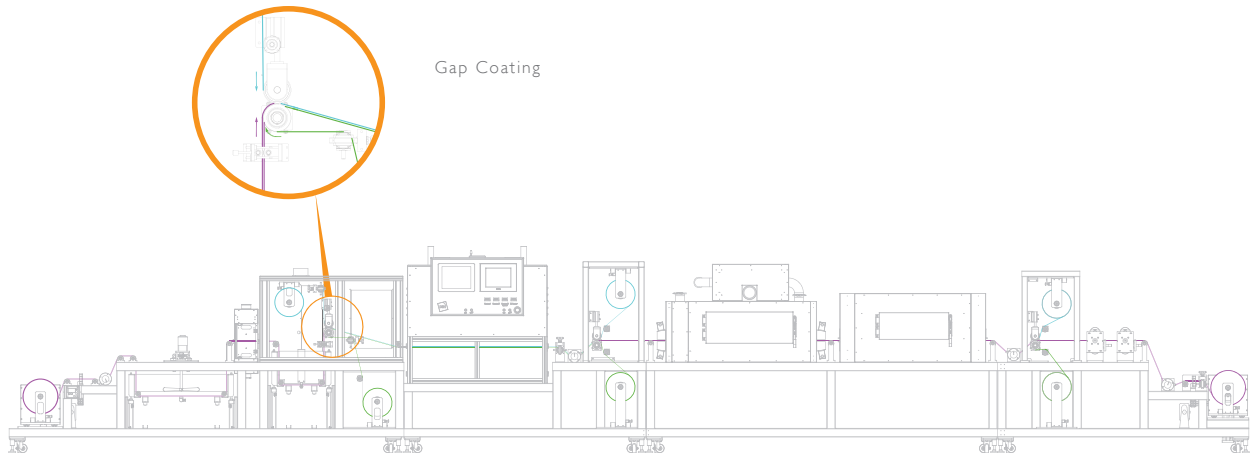

SPECIFICATIONS

Unit : mm

MACHINE SIZE	MACHINE SPEED	COATING METHOD	COATING WIDTH	WEB TENSION	DRYER
10700 x 1900 x 1900	0.1 ~ 10m/min	Dip Coating (Bath x 2 Set, 50L)	Max. 630	Max. 25 kg-f	UV Curing x 1 Set Hot Air x 1 Set (Max. 150°C), IR Ceramic x 1 Set (Max. 200°C)

DETAILS

