


링브로워 (Ring Blower)




제품명 Model	전원 Source (V)	주파수 Fre- quency (Hz)	전류 Current (A)	모터출력 Motor Output (KW)	최대정압 Compressor(토출) Air Pressure (mmAq)	최대정압 Compressor(흡입) Air Pressure (mmAq)	최대풍량 Air Volume (CMH) (CMM)	중량 Weight (kg)
DKB-250T-1	3Ø 220/380V	60	2.0/1.15	0.29	1,000	1,000	98	1.6
DKB-400S-1	1Ø 220V	60	3.3	0.45	1,400	1,300	96	1.6
DKB-400T-1	3Ø 220/380V	60	2.3/1.33	0.5	1,600	1,500	98	1.6
DKB-750S-1	1Ø 220V	60	5.7	0.83	1,600	1,500	120	2.0
DKB-750T-1	3Ø 220/380V	60	4.16/2.4	0.83	1,400	1,500	120	2.0

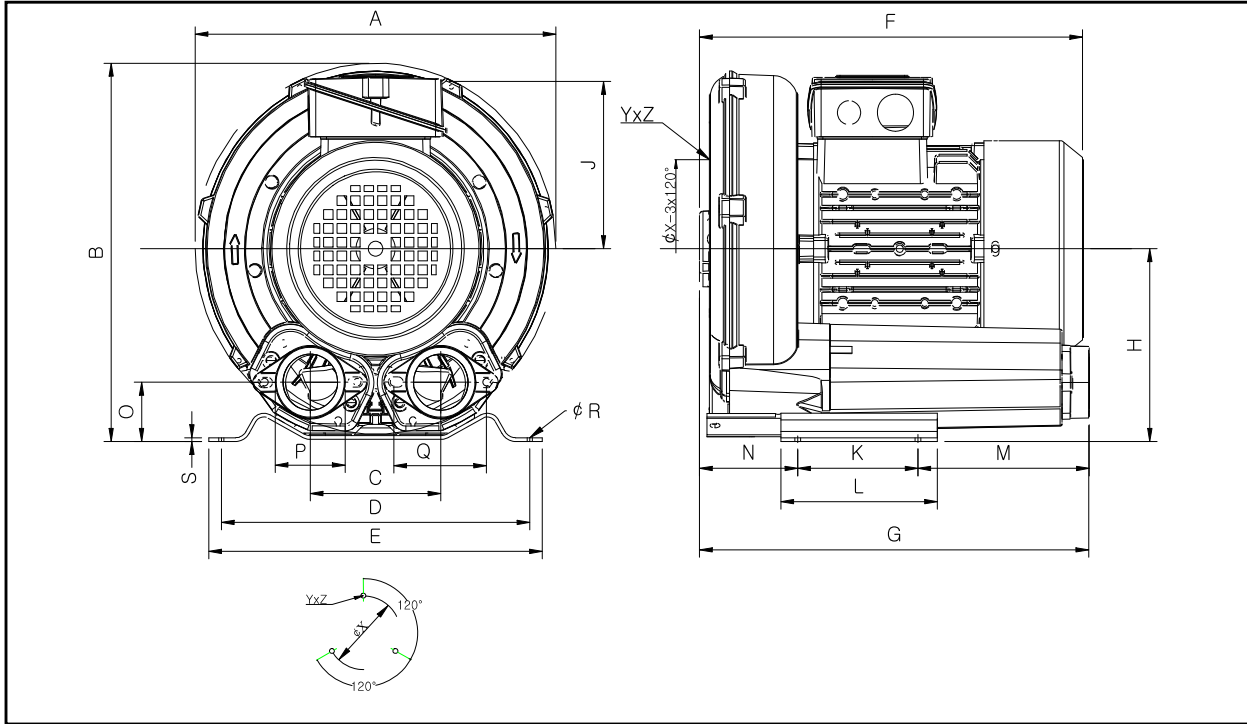

Dimension

Model	A	B	C	D	E	F	G	H	J	k	L	M	N	O	P	Q	φR	S	φX	YxZ	X drillings
DKB-250T-1	249	248	90	205	230	265	269	130	116	83	108	115	71	40	1 1/4" [32A]	40	10	2.5	140	M6x15	0°/120°/240°
DKB-400S-1	249	248	90	205	230	265	269	130	116	83	108	115	71	40	1 1/4" [32A]	40	10	2.5	140	M6x15	0°/120°/240°
DKB-400T-1	249	248	90	205	230	265	269	130	116	83	108	115	71	40	1 1/4" [32A]	40	10	2.5	140	M6x15	0°/120°/240°
DKB-750S-1	273	275	94	205	230	270	272	143	116	83	108	125	64	43	1 1/4" [32A]	43	10	3	160	M6x15	0°/120°/240°
DKB-750T-1	273	275	94	205	230	270	272	143	116	83	108	125	64	43	1 1/4" [32A]	43	10	3	160	M6x15	0°/120°/240°

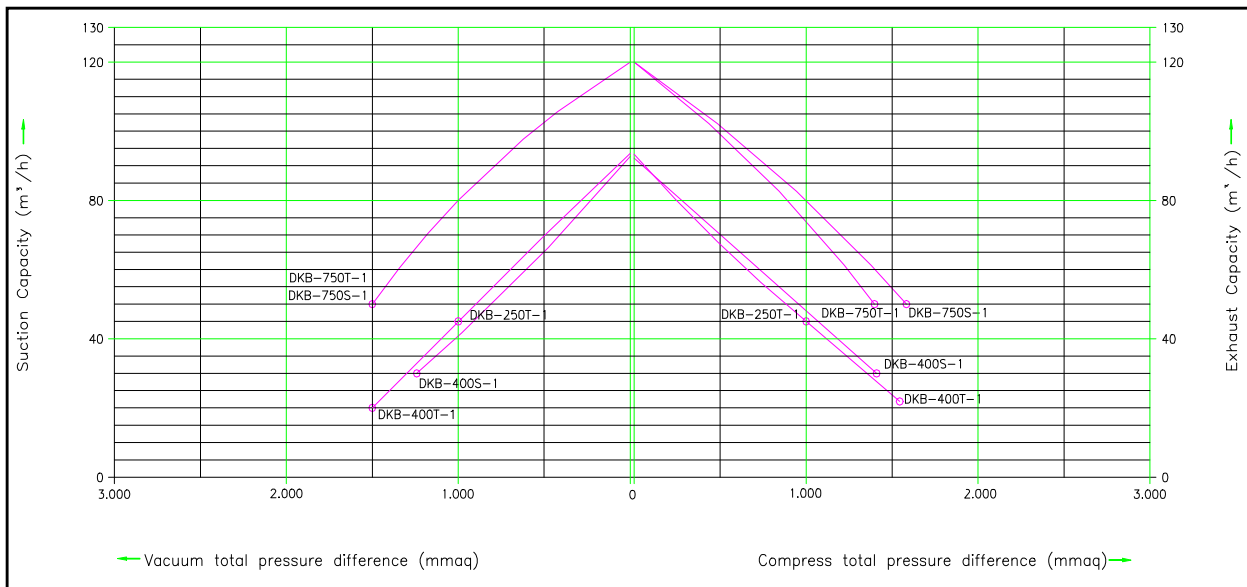

- ◆ 제품 특징
- 오일사용이 없어 공기가 깨끗하다
- 설치가 용이하고 유지보수비가 적게 든다

- ◆ 제품 사용장소
- 정화조 오폐수처리장
- 양식장의 산소공급
- 분입체의 이송(PVC, 폴리에틸렌, 플라스틱수지등)
- 섬유기계산업(편직기, 방직기계등)
- 곡물류의 이송(식물기계)
- 각종 세척기
- 환기 및 배출장치