


Standard Voltage Transformer



- 옥내용
For Indoor
- 단상 비접지형
Single Phase,
Line to Line Voltage Transformer
- 표준용
For standard

■ Dimension & Drawing

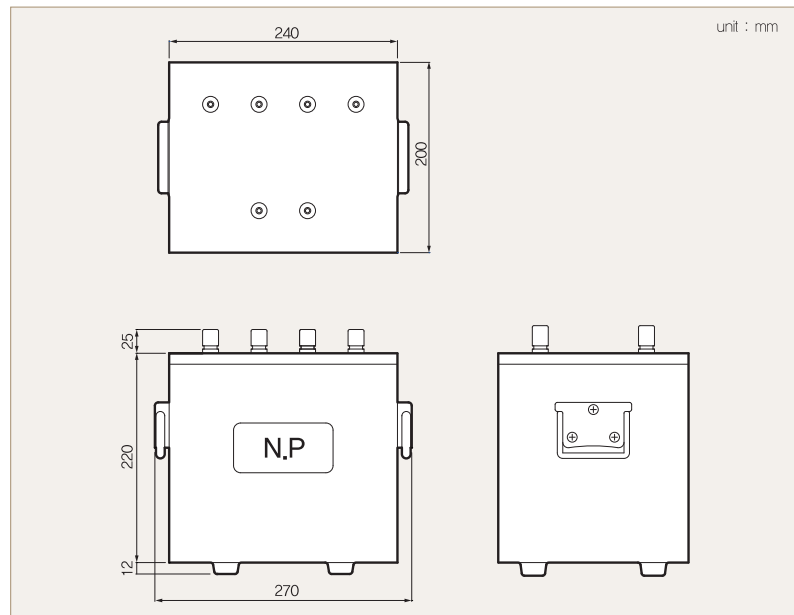

■ Specification

Standard	KS C 1706		
Type	PTS – 1	PTS – 2	PTS – 3
Max. Voltage	1.15 kV	7.2 kV	
Primary Voltage	220, 380, 440 V	1100, 2200, 3300, 6600	220, 440, 3300, 6600
Secondary Voltage	110 V		
Rated Burden	15 VA		
Insulation Level	1.15 / 4 / – kV	7.2 / 16 / 45 kV (6B)	
Accuracy Class	0.2		
Frequency	60 Hz (Others on request)		
Weight	≐ 20.0 kg	≐ 20.0 kg	≐ 20.0 kg

※ 상기의 정격 1차, 2차 전압은 표준형이며, 그 외의 전압비의 제품도 생산 가능합니다.
Above rated primary and secondary voltage is standard type, and besides, can be manufacture the another voltage ratio products.

※ 상기의 Accuracy Class는 표준형이며, 0.1Class는 주문 사양에 의해 생산 가능합니다.
The above Accuracy class is standard type, and 0.1 Class can be manufacture by specification ordering.