



5 SNAP SWITCH

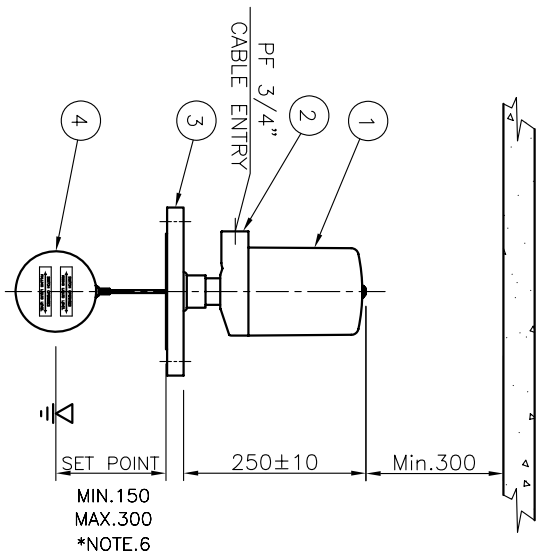

WIRING DIAGRAM

DESIGN DATA			
CODE	KERPIC MGE & ASME B31.1		
UNIT	mm		
ENCLOSURE	WEATHER PROOF		IP65
ORDERING CODE	PROCESS TEMP (CONTACT RATING)		SNAP SWITCH MAT'L
1	Max. 120°C (10A 120V AC / 0.6A 125V DC)		PC, PHENOL,304SS
2	Max. 230°C (5A 250V AC / 0.5A 125V DC)		PC, CERAMIC,304SS
3	Max. 400°C (1A 250V AC / 1A 30V DC)		PC, CERAMIC,304SS
4	Max. 230°C (15A 250V AC / 1A 30V DC)		PC, CERAMIC,304SS
5	Max. 400°C (1A 115V AC / 3A 28V DC)		PC, CERAMIC,304SS
HERMETICAL SEAL TYPE			

NOTES


1. REFER TO INSTALLATION MANUAL WHEN YOU SET IT UP
2. CABLE SIZE : MAX.14 AWG.
3. DEAD BAND IS 15mm FIXEDLY
4. HEAD ROOM OF 300mm MUST BE SECURED ABOVE THE HEAD FOR INSTALLATION / REMOVAL AND MAINTENANCE
5. CABLE CONNECTION IN TERMINAL PART VIA CLAMPED RING TYPE
6. IF SET POINT EXCEED 300mm, PLEASE CONTACT SEQJIN.

TOTAL Q'TY : - SETS

NO.	TAG NO.	FLUID(UPPER/LOWER)	OPER. PRESS. MAX.(Bar)	OPER. TEMP. MAX.(°C)	RATING	SET POINT	Q'TY
1	-	-	-	-	150#	150	- SETS

	OR	OPENS ON RISING LEVEL
	CR	CLOSES ON RISING LEVEL
	OF	OPENS ON FALLING LEVEL
	CF	CLOSES ON FALLING LEVEL
V		SWITCH ACTION

REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED
△					
△					
△					
△					

MANUFACTURER					
 Seodin Instech Co., Ltd.					
SCALE	UNIT NO.	EXP CODE	WORK ORDER NO.		
N/S		SJ-MO15-DWG-AP001-A			
TITLE					
VERTICAL FLOAT TYPE LEVEL SWITCH ASSEMBLY DRAWING					
PROJECT					
-					
CUSTOMER					
-					
BILL OF MATERIAL					
NO DESCRIPTION MATERIAL QTY SPECIFICATION REMARK					
5	SNAP SWITCH				
4	FLOAT	316LSS	1	φ90	
3	SENSOR FLANGE	A105	1	4" RF	
2	BASE	AC2B	1		
1	COVER	C.S	1		