



5 SNAP SWITCH



WIRING DIAGRAM

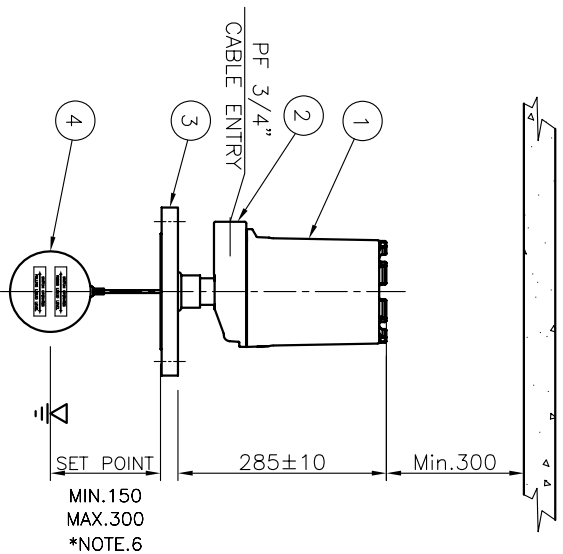

NO.	TAG NO.	FLUID(UPPER/LOWER)	OPER. PRESS. MAX.(Barg)	OPER. TEMP. MAX.(°C)	RATING	SET POINT	Q'TY
1	-	-	-	-	150#	150	- SETS

TOTAL Q'TY : - SETS

OR	OPENS ON RISING LEVEL
CR	CLOSES ON RISING LEVEL
OF	OPENS ON FALLING LEVEL
CF	CLOSES ON FALLING LEVEL
V	SWITCH ACTION

REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED
△					
△					
△					
△					
△					

DESIGN DATA

CODE	KEPIC MGE & ASME B31.1
UNIT	mm
ENCLOSURE	WEATHER PROOF
ORDERING CODE	PROCESS TEMP/(CONTACT RATING)
1	Max.120°C (10A 120V AC / 0.6A 125V DC)
2	Max.230°C (5A 250V AC / 0.5A 125V DC)
3	Max.400°C (1A 250V AC / 1A 30V DC)
4	Max.230°C (15A 250V AC / 1A 30V DC)
5	Max.400°C (1A 115V AC / 3A 28V DC)
HERMETICAL SEAL TYPE	

NOTES

1. REFER TO INSTALLATION MANUAL WHEN YOU SET IT UP
2. CABLE SIZE : MAX.14 AWG.
3. DEAD BAND IS 15mm FIXEDLY
4. ABOVE THE HEAD FOR INSTALLATION / REMOVAL AND MAINTENANCE
5. CABLE CONNECTION IN TERMINAL PART VIA CLAMPED RING TYPE
6. IF SET POINT EXCEED 300mm, PLEASE CONTACT SEQJIN.

NO	DESCRIPTION	MATERIAL	QTY	SPECIFICATION	REMARK
5	SNAP SWITCH				
4	FLOAT	316LSS	1	φ90	
3	SENSOR FLANGE	A105	1	4" RF	
2	BASE	ADC12	1		
1	COVER	ADC12	1		

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-

TITLE
VERTICAL FLOAT TYPE LEVEL SWITCH
SMC-73F-1-A-1-A-1-B-1
ASSEMBLY DRAWING

MANUFACTURER

Seodin Instech Co., Ltd.

SCALE	1:1	REV.	
DATE	SJ-MO15-DWG-APO02-A	REV.	