



5 SNAP SWITCH

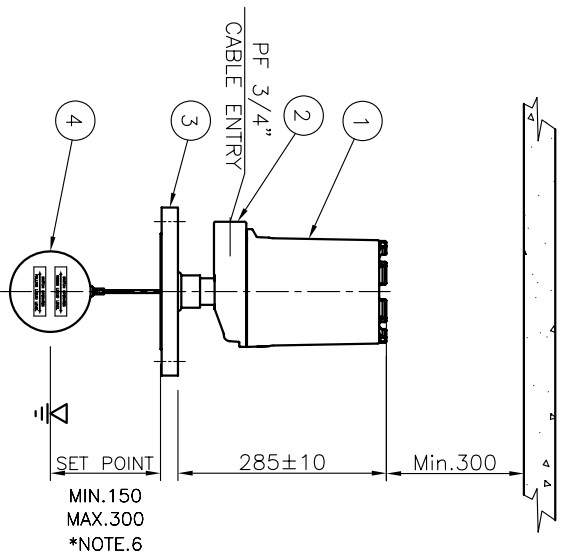

WIRING DIAGRAM



DESIGN DATA

CODE	KEPC MGE & ASME B31.1		
UNIT	mm		
ENCLOSURE	WEATHER PROOF	IP65	
ORDERING CODE	PROCESS TEMP/(CONTACT RATING)	SNAP SWITCH MAT'L	
1	Max.120°C (10A 120V AC / 0.6A 125V DC)	PC, PHENOL,304SS	
2	Max.230°C (5A 250V AC / 0.5A 125V DC)	PC, CERAMIC,304SS	
3	Max.400°C (1A 250V AC / 1A 30V DC)	PC, CERAMIC,304SS	
4	Max.230°C (15A 250V AC / 1A 30V DC)	PC, CERAMIC,304SS	
5	Max.400°C (1A 115V AC / 3A 28V DC)	PC, CERAMIC,304SS	
	HERMETICAL SEAL TYPE		

NOTES

1. REFER TO INSTALLATION MANUAL WHEN YOU SET IT UP
2. CABLE SIZE : MAX.14 AWG.
3. DEAD BAND IS 15mm FIXEDLY
4. ABOVE THE HEAD FOR INSTALLATION / REMOVAL AND MAINTENANCE
5. CABLE CONNECTION IN TERMINAL PART VIA CLAMPED RING TYPE
6. IF SET POINT EXCEED 300mm, PLEASE CONTACT SEQUIN.

TOTAL Q'TY : - SETS

NO.	TAG NO.	FLUID(UPPER/LOWER)	OPPR. PRESS. MAX.(Barg)	OPPR. TEMP. MAX.(°C)	RATING	SET POINT	Q'TY
1	-	-	-	-	150#	150	- SETS

OR	OPENS ON RISING LEVEL
CR	CLOSES ON RISING LEVEL
OF	OPENS ON FALLING LEVEL
CF	CLOSES ON FALLING LEVEL
V	SWITCH ACTION

△							
△							
△							
△							
△							
REV	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED		

BILL OF MATERIAL

NO	DESCRIPTION	MATERIAL	QTY	SPECIFICATION	REMARK
5	SNAP SWITCH				
4	FLOAT	316LSS	1	φ90	
3	SENSOR FLANGE	A105	1	4" RF	
2	BASE	ADC12	1		
1	COVER	ADC12	1		


BILL OF MATERIAL

CUSTOMER	-
PROJECT	-

TITLE  
VERTICAL FLOAT TYPE LEVEL SWITCH  
SMC-73F-1-A-1-A-1-C-1  
ASSEMBLY DRAWING

MANUFACTURER

 **Seodin Instech Co., Ltd.**

SCALE		EXP CODE	-	Work Order No.	-	REV	
N/S	DATE NO.	SJ-MO15-DWG-AP003-A					