



5 SNAP SWITCH

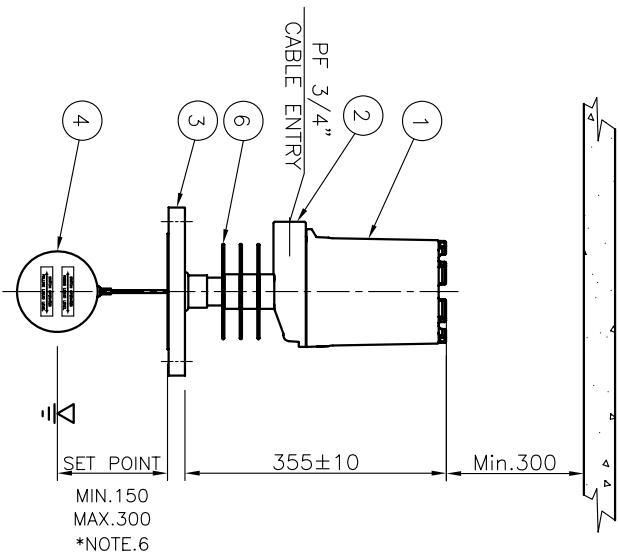

WIRING DIAGRAM

DESIGN DATA

CODE	KEPIC MGE & ASME B31.1		
UNIT	mm		
ENCLOSURE		Ex d IIC T6	IP67
ORDERING CODE	PROCESS TEMP (CONTACT RATING)		SNAP SWITCH MAT'L
6	Max. 350°C (5A 250V AC / 0.5A 125V DC)		PC, CERAMIC, 304SS
7	Max. 450°C (1A 250V AC / 1A 30V DC)		PC, CERAMIC, 304SS
8	Max. 350°C (15A 250V AC / 1A 125V DC)		PC, CERAMIC, 304SS
9	Max. 450°C (1A 115V AC / 3A 28V DC)		PC, CERAMIC, 304SS
HERMETICAL SEAL TYPE			

NOTES

1. REFER TO INSTALLATION MANUAL WHEN YOU SET IT UP
2. CABLE SIZE : MAX. 14 AWG.
3. DEAD BAND IS 15mm FIXEDLY
4. HEAD ROOM OF 300mm MUST BE SECURED ABOVE THE HEAD FOR INSTALLATION / REMOVAL AND MAINTENANCE
5. CABLE CONNECTION IN TERMINAL PART VIA CLAMPED RING TYPE
6. IF SET POINT EXCEED 300mm, PLEASE CONTACT SEQUIN.

TOTAL Q'TY : - SETS

NO.	TAG NO.	FLUID(UPPER/LOWER)	OPPR. PRESS. MAX.(Barg)	OPPR. TEMP. MAX.(°C)	RATING	SET POINT	Q'TY
1	-	-	-	-	150#	150	- SETS

OR	OPENS ON RISING LEVEL
CR	CLOSES ON RISING LEVEL
OF	OPENS ON FALLING LEVEL
CF	CLOSES ON FALLING LEVEL
V	SWITCH ACTION

△					
△					
△					
△					
△					
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

TITLE  
VERTICAL FLOAT TYPE LEVEL SWITCH  
SMC-73F-1-A-1-A-5-C-1  
ASSEMBLY DRAWING

MANUFACTURER

Seodin Instech Co., Ltd.

SCALE	UNIT	EXP CODE	Weld Order No.	RELT
N/S	mm	SJ-MO15-DWG-AP006-A	-	△