



6 SNAP SWITCH



WIRING DIAGRAM

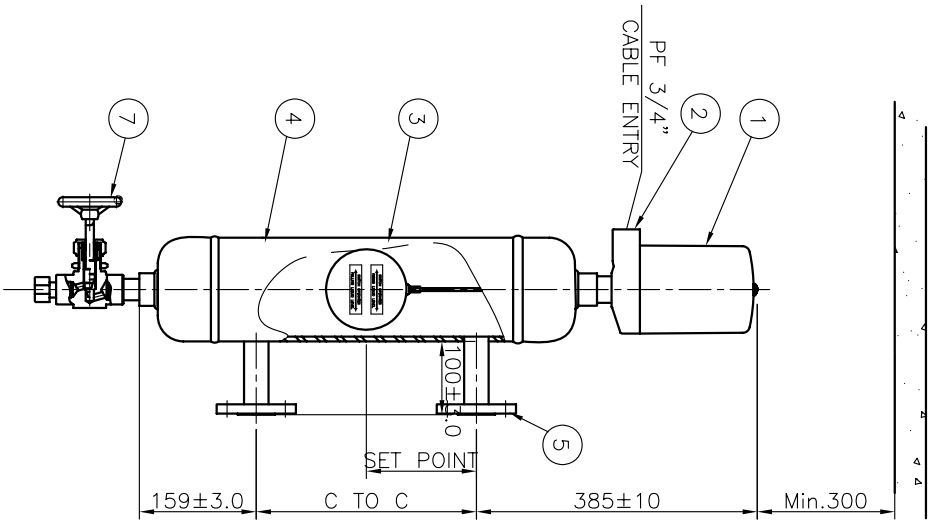

TOTAL Q'TY : - SETS

NO.	TAG NO.	FLUID(UPPER/LOWER)	OPER. PRESS. MAX.(Bar)	OPER. TEMP. MAX.(°C)	RATING	SET POINT	C TO C (MEASURING RANGE)	CONNECTION ANSI 150# 2" RF (SIDE-SIDE)	Q'TY
1	-	-	-	-	150#	150	-	- SETS	

OR	OPENS ON RISING LEVEL
CR	CLOSES ON RISING LEVEL
OF	OPENS ON FALLING LEVEL
CF	CLOSES ON FALLING LEVEL
V	SWITCH ACTION

△									
△									
△									
△									
△									
REV	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED				

DESIGN DATA

CODE	KEPIC MGE & ASME B31.1
UNIT	mm
ENCLOSURE	WEATHER PROOF
IP65	
ORDERING CODE	PROCESS TEMP/CONTACT RATING
1	Max.120°C (10A 120V AC / 0.6A 125V DC)
2	Max.230°C (5A 250V AC / 0.5A 125V DC)
3	Max.400°C (1A 250V AC / 1A 30V DC)
4	Max.230°C (15A 250V AC / 1A 125V DC)
HERMETICAL SEAL TYPE	PC, CERAMIC,304SS

NOTES

1. REFER TO INSTALLATION MANUAL
2. WHEN YOU SET IT UP
3. CABLE SIZE : 14 AWG.
4. DEAD BAND IS 15mm FIXEDLY
5. HEAD ROOM OF 300mm MUST BE SECURED ABOVE THE HEAD FOR INSTALLATION / REMOVAL AND MAINTENANCE
6. CABLE CONNECTION IN TERMINAL PART VIA CLAMPED RING TYPE
7. PAINTING SPEC : SEQUIN STD.
8. TEST FOR WELDING INTEGRITY : HYDRO+PT TEST
9. CHAMBER ORDERING INFORMATION, SMC-75B-1-A-1-D-2-0-2-A-1-A

7	GLOBE VALVE	-	1	NPT 1/2"	
6	SNAP SWITCH				
5	PROCESS CONNECTION	A105	2	1" RF	
4	CHAMBER ASS'Y	A105	1	5" Sch.40	
3	FLOAT	316LSS	1	Ø110	
2	BASE	AC2B	1		
1	COVER	C.S	1		
NO	DESCRIPTION	MATERIAL	QTY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-

TITLE	VERTICAL FLOAT TYPE LEVEL SWITCH SMC-75B-1-A-1-A-1-A-1-A-1 ASSEMBLY DRAWING
-------	---

MANUFACTURER	Seodin Instech Co., Ltd.
SCALE	1:1
DATE	SU-MO15-DWG-AP501-B
REV	