



5 SNAP SWITCH

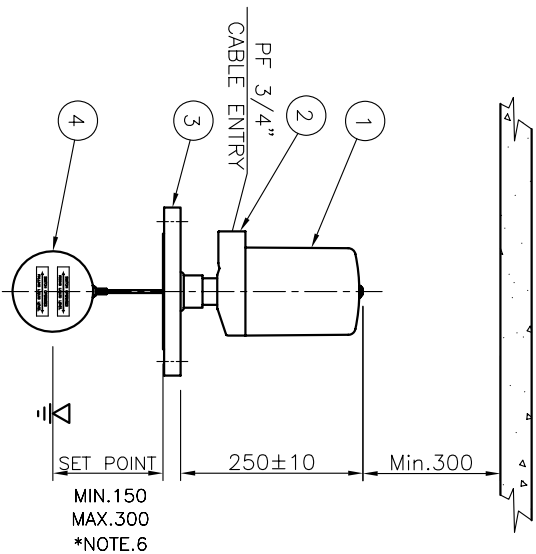

WIRING DIAGRAM

NO.	TAG NO.	FLUID(UPPER/LOWER)	OPER. PRESS. MAX.(Bar)	OPER. TEMP. MAX.(C)	RATING	SET POINT	Q'TY
1	-	-	-	-	150#	150	- SETS

TOTAL Q'TY : - SETS

OR	OPENS ON RISING LEVEL
CR	CLOSES ON RISING LEVEL
OF	OPENS ON FALLING LEVEL
CF	CLOSES ON FALLING LEVEL
V	SWITCH ACTION

REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED
△					
△					
△					
△					

DESIGN DATA

CODE	KEPIC MGE & ASME B31.1		
UNIT	mm		
ENCLOSURE	WEATHER PROOF		IP65
ORDERING CODE	PROCESS TEMP.(CONTACT RATING)		SNAP SWITCH MAT'L
1	Max.120°C (10A 120V AC / 0.6A 125V DC)		PC, PHENOL,304SS
2	Max.230°C (5A 250V AC / 0.5A 125V DC)		PC, CERAMIC,304SS
3	Max.400°C (1A 250V AC / 1A 30V DC)		PC, CERAMIC,304SS
4	Max.230°C (15A 250V AC / 1A 125V DC)		PC, CERAMIC,304SS
	HERMETICAL SEAL TYPE		

NOTES

1. REFER TO INSTALLATION MANUAL
2. WHEN YOU SET IT UP
2. CABLE SIZE : MAX.14 AWG.
3. CABLE BAND IS 15mm FIXEDLY
4. HEAD ROOM OF 300mm MUST BE SECURED ABOVE THE HEAD FOR INSTALLATION / REMOVAL AND MAINTENANCE
5. CABLE CONNECTION IN TERMINAL PART VIA CLAMPED RING TYPE
6. IF SET POINT EXCEED 300mm, PLEASE CONTACT SEOJIN.

5	SNAP SWITCH			
4	FLOAT	316LSS	1	ø110
3	SENSOR FLANGE	A105	1	5" RF
2	BASE	AC2B	1	
1	COVER	C.S	1	
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION
REMARK				

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-

TITLE	VERTICAL FLOAT TYPE LEVEL SWITCH SMC-75F-7-A-1-A-1-A-1 ASSEMBLY DRAWING
-------	---

MANUFACTURER	Seojin Instech Co., Ltd.		
SCALE	1:1	REV.	
DATE	SJ-MO15-DWG-AP001-B	REV.	
N/S			