



5 SNAP SWITCH

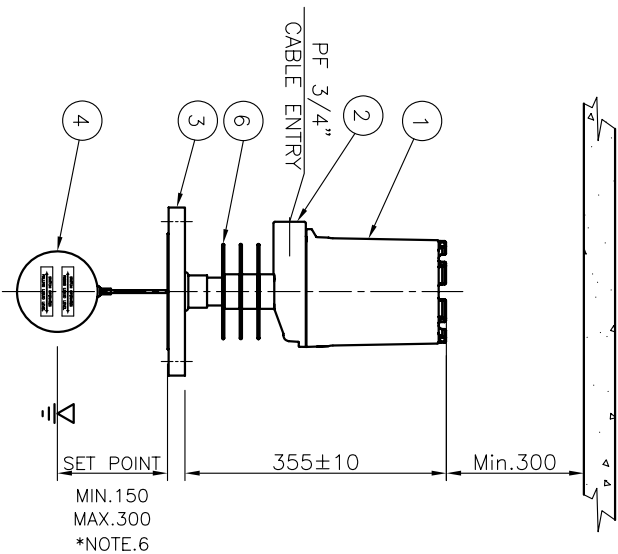

WIRING DIAGRAM

DESIGN DATA			
CODE	KERPC MGE & ASME B31.1		
UNIT	mm		
ENCLOSURE	Ex d IIC T6	IP67	
ORDERING CODE	PROCESS TEMP (CONTACT RATING)	SNAP SWITCH MAT'L	
5	Max.400°C (1A 115V AC / 3A 28V DC)	PC, CERAMIC,304SS	
6	Max.350°C (5A 250V AC / 0.5A 125V DC)	PC, CERAMIC,304SS	
7	Max.450°C (1A 250V AC / 1A 30V DC)	PC, CERAMIC,304SS	
8	Max.350°C (15A 250V AC / 1A 125V DC)	PC, CERAMIC,304SS	
9	Max.450°C (1A 115V AC / 3A 28V DC)	PC, CERAMIC,304SS	

NOTES


- REFER TO INSTALLATION MANUAL WHEN YOU SET IT UP
- CABLE SIZE : MAX.14 AWG.
- DEAD BAND IS 15mm FIXEDLY
- HEAD ROOM OF 300mm MUST BE SECURED ABOVE THE HEAD FOR INSTALLATION / REMOVAL AND MAINTENANCE
- CABLE CONNECTION IN TERMINAL PART VIA CLAMPED RING TYPE
- IF SET POINT EXCEED 300mm, PLEASE CONTACT SEOJIN.

TOTAL Q'TY : - SETS

NO.	TAG NO.	FLUID(UPPER/LOWER)	OPPR. PRESS. MAX.(Barg)	OPPR. TEMP. MAX.(°C)	RATING	SET POINT	Q'TY
1	-	-	-	-	150#	150	- SETS

	OR	OPENS ON RISING LEVEL
	CR	CLOSES ON RISING LEVEL
	OF	OPENS ON FALLING LEVEL
	CF	CLOSES ON FALLING LEVEL
✓		SWITCH ACTION

△							
△							
△							
△							
△							
REV		DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED	

MANUFACTURER				
 <b>Seodin Instech Co., Ltd.</b>				
SCALE	UNIT	TYPE CODE	WORK ORDER NO.	
N/S	mm	SJ-MO15-DWG-AP005-B		
TITLE				
VERTICAL FLOAT TYPE LEVEL SWITCH				
SMC-75F-1-A-1-A-5-B-1				
ASSEMBLY DRAWING				
PROJECT				
-				
CUSTOMER				
-				
BILL OF MATERIAL				
NO DESCRIPTION MATERIAL QTY SPECIFICATION REMARK				
6	COOLING FIN	AL	3	
5	SNAP SWITCH			
4	FLOAT	316LSS	1	ø110
3	SENSOR FLANGE	A105	1	5" RF
2	BASE	ADC12	1	
1	COVER	ADC12	1	
TOTAL Q'TY : - SETS				